

Sundance® Spas

Hot Tub Specification Handbook



Important Safety Instructions - All Models



©2021 Sundance Spas, Inc. Sundance Spas may make product modifications and enhancements. Therefore, specifications may change without notice. Dimensions are approximate and for reference only.



CAUTION: Always measure each hot tub for exact dimensions before designing its foundational support and/or decking.



When designing a foundational support, always account for the following load factors:

1. Filled hot tub weight, plus (+)
2. Combined occupant weight at maximum seating capacity, plus (+)
3. Weight of support decking, when applicable.



The technical data given in this publication is for reference purposes only. It implies no warranty of any kind.



Spa specifications, dimensions and operations are subject to change without notice.

Table of Contents


980 Series Spas	1
Claremont™ Specifications	1
Claremont Operation/Seat Depths	2
Claremont Portable Dimensions	3
Kingston™ Specifications	4
Kingston Operation/Seat Depths	5
Kingston Portable Dimensions	6
Lisbon™ Specifications	7
Lisbon Operation/Seat Depths	8
Lisbon Portable Dimensions	9
Odessa™ Specifications	10
Odessa Operation/Seat Depths	11
Odessa Portable Dimensions	12
 880 Series Spas	 13
Maxxus™ Specifications	13
Maxxus Operation/Seat Depths	14
Maxxus Portable Dimensions	15
Aspen® Specifications	16
Aspen Operation/Seat Depths	17
Aspen Portable Dimensions	18
Optima® Specifications	19
Optima Operation/Seat Depths	20
Optima Portable Dimensions	21
Cameo® Specifications	22
Cameo Operation/Seat Depths	23
Cameo Portable Dimensions	24
Altamar® Specifications	25
Altamar Operation/Seat Depths	26
Altamar Portable Dimensions	27
Marin® Specifications	28
Marin Operation/Seat Depths	29
Marin Portable Dimensions	30
Cambria™ Specifications	31
Cambria Operation/Seat Depths	32
Cambria Portable Dimensions	33
Capri® Specifications	34
Capri Operation/Seat Depths	35
Capri Portable Dimensions	36
SunSide™ Dimensions	37
 780 Series Spas	 38
Hamilton™ Specifications	38
Hamilton Operation/Seat Depths	39
Hamilton Portable Dimensions	40
Chelsee® Specifications	41
Chelsee Operation/Seat Depths	42
Chelsee Portable Dimensions	43

Hanover™ Specifications	44
Hanover Operation/Seat Depths	45
Hanover Portable Dimensions	46
 Bristol™ Specifications	47
Bristol Operation/Seat Depths	48
Bristol Portable Dimensions	49
 Montclair™ Specifications	50
Montclair Operation/Seat Depths	51
Montclair Portable Dimensions	52
 Dover™ Specifications	53
Dover Operation/Seat Depths	54
Dover Portable Dimensions	55
 680 Series Spas	56
McKinley™ Specifications	56
McKinley Operation/Seat Depths	57
McKinley Portable Dimensions	58
 Ramona™ Specifications	59
Ramona Operation/Seat Depths	60
Ramona Portable Dimensions	61
 Peyton® Specifications	62
Peyton Operation/Seat Depths	63
Peyton Portable Dimensions	64
 Edison® Specifications	65
Edison Operation/Seat Depths	66
Edison Portable Dimensions	67
 Prado™ Specifications	68
Prado Operation/Seat Depths	69
Prado Portable Dimensions	70
 Alicia™ Specifications	71
Alicia Operation/Seat Depths	72
Alicia Portable Dimensions	73
 Denali® Specifications	74
Denali Operation/Seat Depths	75
Denali Portable Dimensions	76
 Splash™ Series Spas.....	77
Berkeley™ 40 Jets Specifications	77
Berkeley 40 Jets Operation/Seat Depths	78
Berkeley 40 Jets Portable Dimensions	79
 Berkeley™ 30 Jets Specifications	80
Berkeley 30 Jets Operation/Seat Depths	81
Berkeley 30 Jets Portable Dimensions	82
 Brook™ 40 Jets Specifications	83
Brook 40 Jets Operation/Seat Depths	84
Brook 40 Jets Portable Dimensions	85
 Brook™ 30 Jets Specifications	86
Brook 30 Jets Operation/Seat Depths	87
Brook 30 Jets Portable Dimensions	88
 Paisley™ Specifications	89
Paisley Operation/Seat Depths	90
Paisley Portable Dimensions	91

Sundance Spas 980 Claremont™

Specifications

Dimensions:	92" x 100" x 34" (233.7 cm x 254 cm x 86.4 cm)
Seating Capacity:	5-6 Adults
Dry Weight:	1,045 lbs (474 kg)
Filled Weight (Spa Volume):	5,348 lbs (2,426 kg)
Filled Weight (Average Fill):	4,423 lbs (2,006 kg)
Water Capacity (Spa Volume):	516 US Gal (1,953 Liters)
Water Capacity (Average Fill):	405 US Gal (1,533 Liters)
Controls:	980 iTouch™ Glass Interface LCD Control, Displays Temperature, Time, Cycles and Jet/Air System Control. Offers Customizing of Filtration Cycles, Lighting, Water Temperature Setting and other features
Water Delivery:	3 TheraMax High-Flow Pumps and 8-Hour Dynamic Flow Circulation System
Pump 1:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.
Pump 3:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.
Pump 4:	High-Output Dynamic Flow, 8-Hour Filter/Circulation Pump (35 gpm) Programmable for Daily Start Time and Duration
Total Hydrojets:	59
Seat A Jets:	2 Fluidix Nex, 6 Fluidix Reflex, 2 Pulsator, 8 Focus-Relief®, 2 Vortex
Seat B Jets:	4 Fluidix Reflex
Seat C Jets:	12 Fluidix-ST, 2 Fluidix Nex, 2 Pulsator, 2 Accu-Pressure
Seat D Jets:	2 Vortex
Seat E Jets:	2 Fluidix Nex, 4 Fluidix Reflex, 2 Fluidix Intelli-Jet, 2 Accu-Pressure
Seat F Jets:	2 Vortex, 1 Accu-Pressure (sidewall)
Footwell Jets (G):	2 Whirlpool
Air Blower:	High-efficiency, 1-Speed
Aromatherapy Delivery:	6 Silent Air® Injector Jets with Quiet High Speed Air Pump
Air Controls/Massage Selectors:	4/2
Filter:	MicroClean® Ultra Filtration System, 130 ft² (2 interlocking cartridge filters)
Water Treatment:	Automatic Brominator and Dynamic Flow Circulation System; Factory installed CLEARRAY® Water Purification System and CLEARRAY® PRO ₃ TECT™
Lighting:	Multicolored LED Lighting System (1 Waterfall, 1 Footwell), Exterior Corner Lights, SunCooler Bin Lights, Seat Accent Lights
Synthetic Cabinet:	Available in Coastal, Mahogany
Shell Colors:	Platinum, Celestite (Gypsum), Sahara, Monaco, Porcelain, Midnight
Headrests:	3
Heater:	Low Flow 5.5 kW With Titanium Element Export (50 Hz): Low Flow 2.7 kW with Titanium Element
Electrical Requirements:	North America (60 Hz): 240 VAC@40A/50A or 60A; Export (50 Hz): 230-240 VAC@1x20A, 1x16A/1x20A, 3x16A (see manual for more configurations); or Suitable Rated Circuit Breaker To Comply With Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required For This Configuration.
Limited Warranty*:	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 1 Year Stereo Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 2 Years Stereo
Waterfall Feature:	Adjustable Flow Rate; Colored Lighting
Audio System (Optional):	Factory Installed BLUEWAVE® 2.0 Wireless Spa Stereo System with Auxiliary 3.5 mm headphone jack connection, Bluetooth® compatible, 4 premium speakers and a powered subwoofer
Special Features:	Factory Installed SmartTub™ module




*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 980 Claremont

Operation/Seat Depths

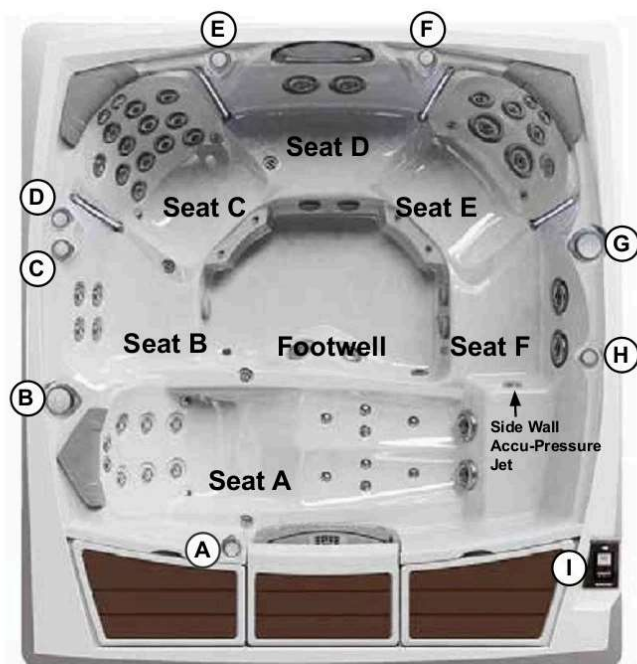

59 Total Jets



- (A) Air Control - Activates Seat A Jets (2 Fluidix Nex, 6 Fluidix Reflex, 2 Pulsators, 2 Vortex Jets) - Also used when draining the SunCooler Bins in the close position.
- (B) Massage Selector [Pump 2] - Adjusts Massage Level Between Seat A Jets and Footwell Jets
- (C) AccuSsage Seat Valve - Adjusts Water Flow for Seat C (2 Fluidix Nex, 12 Fluidix-ST, 2 Accu-Pressure Jets, 2 Pulsators)
- (D) Air Control - Activates Seat C Jets (2 Fluidix Nex, 12 Fluidix-ST, 2 Accu-Pressure Jets, 2 Pulsators), Accu-Pressure Side Wall Jet
- (E) Waterfall Selector [8-Hour Circ. Pump] - Controls Waterfall Output
- (F) Air Control - Activates Seat B Jets (4 Fluidix Reflex), Seat D (2 Vortex Jets), Seat E Jets (2-Fluidix Nex, 4 Fluidix Reflex, 2 Fluidix Intelli-Jet, 2 Accu-Pressure Jets) and Seat F Jets (2 Vortex Jets)
- (G) Massage Selector [Pump 1] - Adjusts Massage Level Between the Seat E Jets and Seat B Jets + Seat D Jets + Seat F Jets
- (H) Air Control - Activates Footwell Jets (2 Whirlpool Jets)
- (I) SunScents Dispenser (located under the SunCooler Lid)


- Jets Pump 3: Seat C and Footwell Dump Port
- Jets Pump 2: Seat A (2 Vortex Jets) are always on when this pump is running.
- Jets Pump 1: Seat E (2 Accu-Pressure Jets) + 1 Accu-Pressure Jet (Side Wall) in Seat F and SunCooler Perimeter Drains are always on when this pump is running.
- Focus-Relief Jets: Work with both the blower and Jets Pump 2. The blower introduces air to the jet and the Jets Pump forces water through.

Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 26.00" (66.04 cm)	G = 7.00" (17.78 cm)
B = 21.50" (54.60 cm)	H = 30.50" (77.47 cm)
C = 26.75" (67.95 cm)	
D = 21.00" (53.34 cm)	SunCooler Bin Depth
E = 24.50" (62.23 cm)	I = 13.50" (34.29 cm)
F = 20.50" (52.07 cm)	


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5" (1.27 cm).**

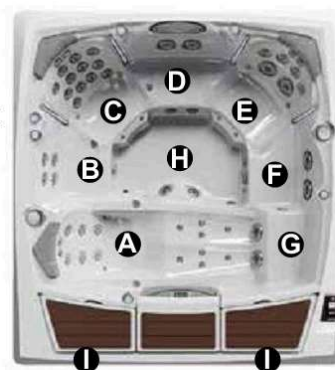


Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 980 Claremont

Portable Dimensions

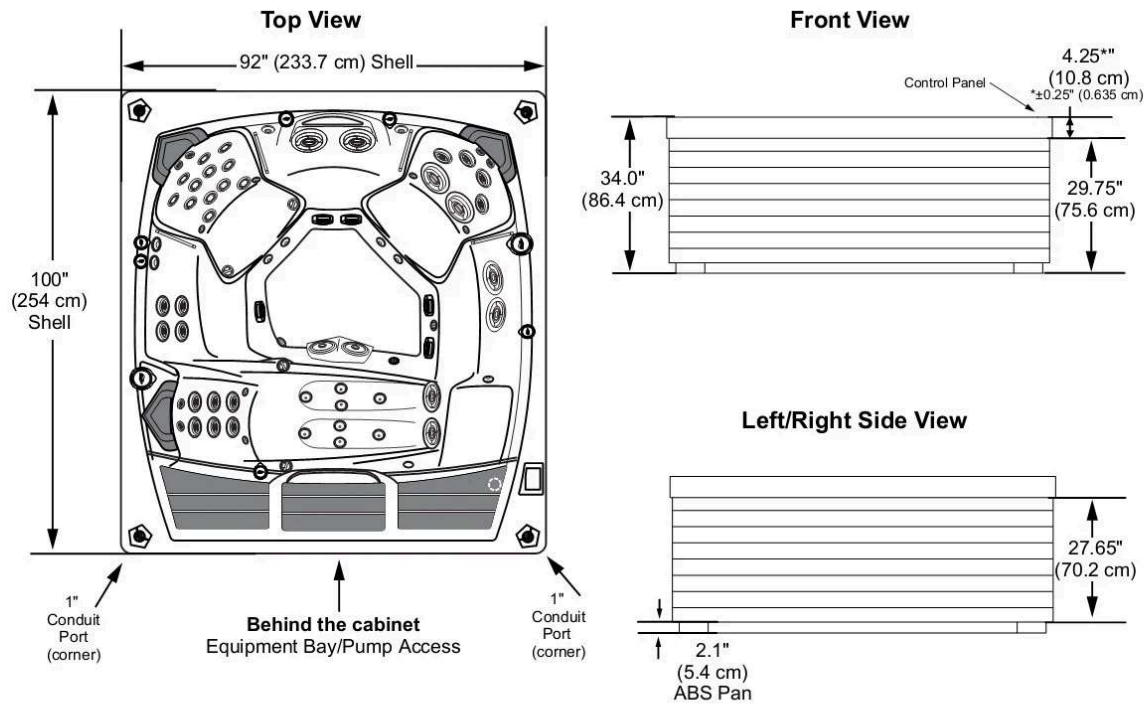

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

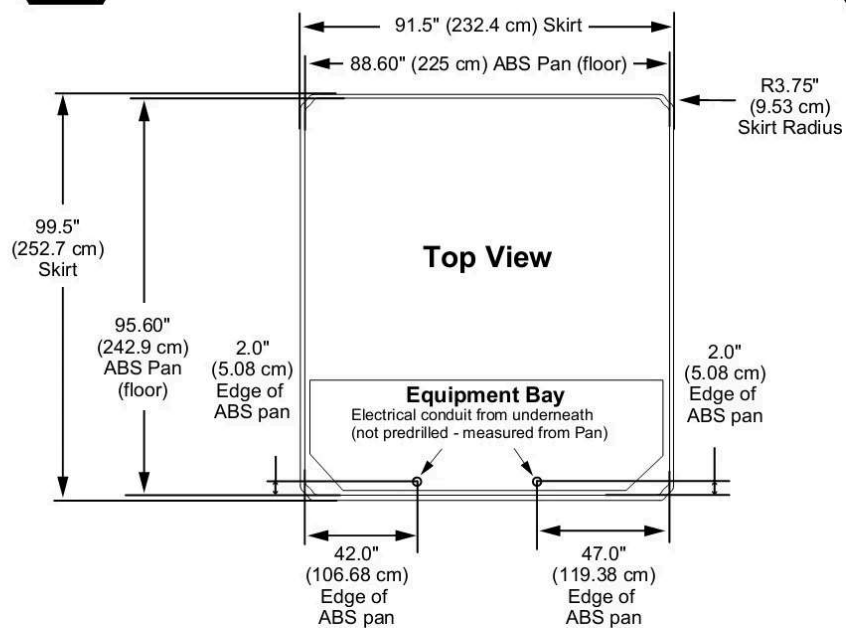

Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 980 Kingston™

Specifications

Dimensions:	92" x 100" x 34" (233.7 cm x 254 cm x 86.4 cm)
Seating Capacity:	6-7 Adults
Dry Weight:	1,048 lbs (475 kg)
Filled Weight (Spa Volume):	5,310 lbs (2,408 kg)
Filled Weight (Average Fill):	4,392 lbs (1,992 kg)
Water Capacity (Spa Volume):	511 US Gal (1,934 Liters)
Water Capacity (Average Fill):	401 US Gal (1,518 Liters)
Controls:	980 iTouch™ Glass Interface LCD Control, Displays Temperature, Time, Cycles and Jet/Air System Control. Offers Customizing of Filtration Cycles, Lighting, Water Temperature Setting and other features
Water Delivery:	3 TheraMax High-Flow Pumps and 8-Hour Dynamic Flow Circulation System
Pump 1:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.
Pump 3:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.
Pump 4:	High-Output Dynamic Flow, 8-Hour Filter/Circulation Pump (35 gpm) Programmable for Daily Start Time and Duration
Total Hydrojets:	57
Seat A Jets:	6 Fluidix Reflex
Seat B Jets:	4 Fluidix Reflex
Seat C Jets:	12 Fluidix-ST, 2 Fluidix Nex, 2 Pulsator, 2 Accu-Pressure
Seat D Jets:	1 Vortex
Seat E Jets:	2 Fluidix Nex, 4 Fluidix Reflex, 2 Fluidix Intelli-Jet, 2 Pulsator, 2 Accu-Pressure
Seat F Jets:	2 Vortex
Seat G Jets:	4 Vortex
Footwell Jets (H):	8 Accu-Pressure, 1 Accu-Pressure (sidewall), 1 Vortex
Air Blower:	High-efficiency, 1-Speed
Aromatherapy Delivery:	12 Silent Air® Injector Jets with Quiet High Speed Air Pump
Air Controls/Massage Selectors:	4/2
Filter:	MicroClean® Ultra Filtration System, 130 ft² (2 interlocking cartridge filters)
Water Treatment:	Automatic Brominator and Dynamic Flow Circulation System; Factory installed CLEARARRAY® Water Purification System and CLEARARRAY® PRO ₃ TECT™
Lighting:	Multicolored LED Lighting System (1 Waterfall, 1 Footwell), Exterior Corner Lights, SunCooler Bin Lights, Seat Accent Lights
Synthetic Cabinet:	Available in Coastal, Mahogany
Shell Colors:	Platinum, Celestite (Gypsum), Sahara, Monaco, Porcelain, Midnight
Headrests:	4
Heater:	Low Flow 5.5 kW With Titanium Element Export (50 Hz): Low Flow 2.7 kW with Titanium Element
Electrical Requirements:	North America (60 Hz): 240 VAC@40A/50A or 60A; Export (50 Hz): 230-240 VAC@1x20A, 1x16A/1x20A, 3x16A (see manual for more configurations); or Suitable Rated Circuit Breaker To Comply With Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required For This Configuration.
Limited Warranty*:	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 1 Year Stereo Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 2 Years Stereo
Waterfall Feature:	Adjustable Flow Rate; Colored Lighting
Audio System (Optional):	Factory Installed BLUEWAVE® 2.0 Wireless Spa Stereo System with Auxiliary 3.5 mm headphone jack connection, Bluetooth® compatible, 4 premium speakers and a powered subwoofer
Special Features:	Factory Installed SmartTub™ module




*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 980 Kingston

Operation/Seat Depths

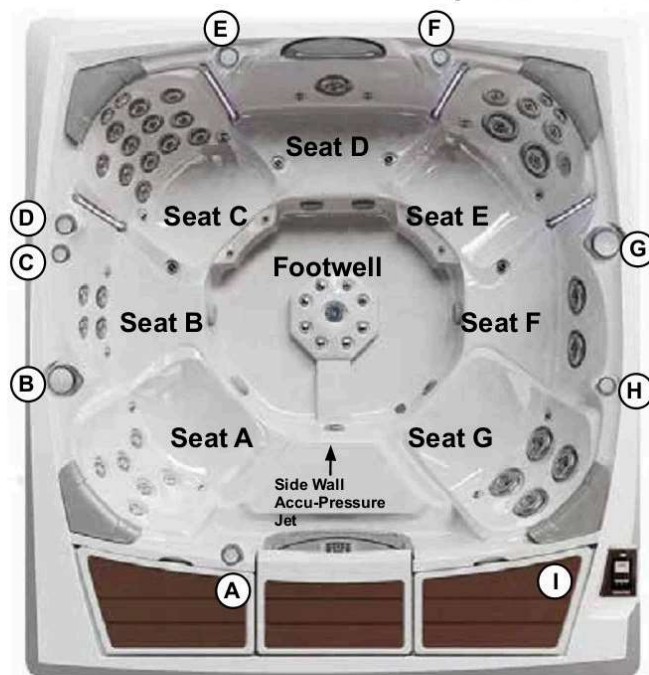

57 Total Jets



(A) Air Control - Activates Seat A Jets (6 Fluidix Reflex), Seat B Jets (4 Fluidix Reflex), Seat F Jets (2 Vortex), Seat D Jets (1 Vortex), and Footwell (2 Accu-Pressure, 1 Vortex) - Also used when draining the SunCooler Bins in the close position.

(B) Massage Selector [Pump 2] - Adjusts Massage Level Between Seat A Jets + 2 Footwell (2 Accu-Pressure) and Seat B Jets (2 Lower Fluidix Reflex) + Seat D Jets + Seat F Jets

(C) AccuSage Seat Valve - Adjusts Water Flow for Seat C (2 Fluidix Nex, 12 Fluidix-ST, 2 Accu-Pressure Jets, 2 Pulsators) + Footwell (2 Accu-Pressure)

(D) Air Control - Activates Seat C Jets (2 Fluidix Nex, 12 Fluidix Reflex, 2 Pulsators, 2 Accu-Pressure) and Footwell (2 Accu-Pressure)

(E) Waterfall Selector [8-Hour Circ. Pump] - Controls Waterfall Output

(F) Air Control - Activates Seat E Jets (2 Fluidix Nex, 4 Fluidix Reflex, 2 Fluidix Intelli-Jet, 2 Pulsators, 2 Accu-Pressure) and Footwell (2 Accu-Pressure)

(G) Massage Selector [Pump 1] - Adjusts Massage Level Between the Seat E Jets + Seat G Jets and Footwell (2 Accu-Pressure) + Footwell (2 Accu-Pressure)

(H) Air Control - Activates Seat G Jets (4 Vortex) and Footwell (2 Accu-Pressure)

(I) SunScents Dispenser

• Jets Pump 3: Seat C Jets + 2 Footwell Jets (2 Accu-Pressure)

• Jets Pump 2: Seat B (2 Upper Fluidix Reflex Jets) + Center Footwell Jet (1 Vortex) are always on when this pump is running.

• Jets Pump 1: Footwell Upper Right (2 Accu-Pressure Jets) + 1 Accu-Pressure Jet (Side Wall) in Footwell and SunCooler Perimeter Drains are always on when this pump is running.

Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 23.25" (59.01 cm)

B = 21.00" (53.34 cm)

C = 26.00" (66.04 cm)

D = 20.50" (52.07 cm)

E = 24.25" (61.60 cm)

F = 20.00" (50.80 cm)

G = 22.00" (55.88 cm)

H = 17.00" (43.18 cm)

I = 29.25" (74.30 cm)

SunCooler Bin Depth

J = 13.50" (34.29 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance $\pm 0.5"$ (1.27 cm).**




Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 980 Kingston

Portable Dimensions

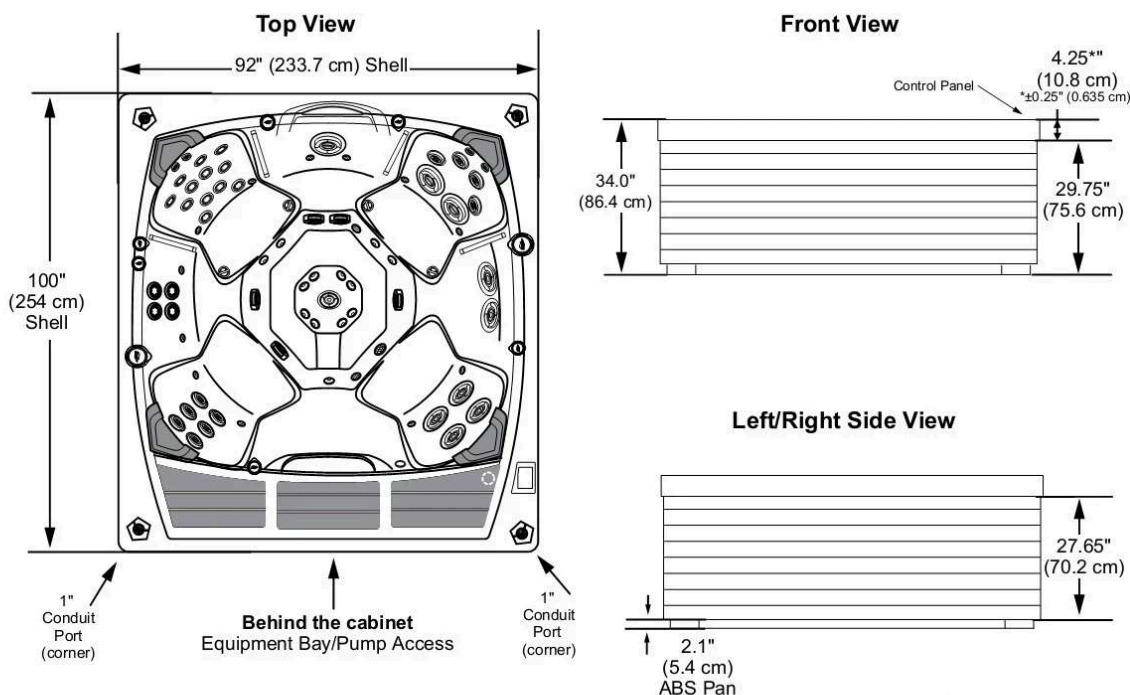

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

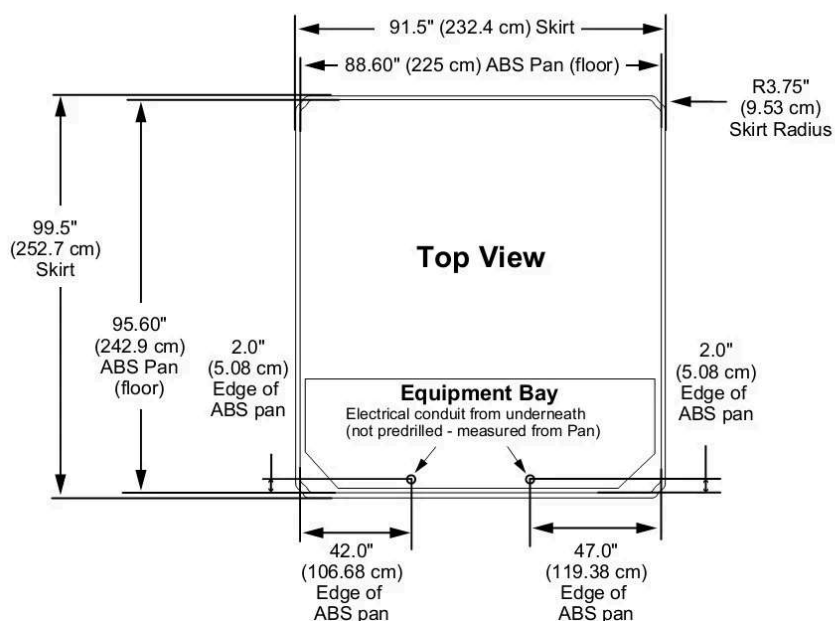


Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 980 Lisbon™

Specifications

Dimensions:	89" x 89" x 34" (226 cm x 226 cm x 86.4 cm)
Seating Capacity:	5-6 Adults
Dry Weight:	819 lbs (371 kg)
Filled Weight (Spa Volume):	4,822 lbs (2,187 kg)
Filled Weight (Average Fill):	3,905 lbs (1,771 kg)
Water Capacity (Spa Volume):	480 US Gal (1,817 Liters)
Water Capacity (Average Fill):	370 US Gal (1,401 Liters)
Controls:	980 iTouch™ Glass Interface LCD Control, Displays Temperature, Time, Cycles and Jet/Air System Control. Offers Customizing of Filtration Cycles, Lighting, Water Temperature Setting and other features
Water Delivery:	2 TheraMax High-Flow Pumps and 8-Hour Dynamic Flow Circulation System
Pump 1:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.
Pump 3:	High-Output Dynamic Flow, 8-Hour Filter/Circulation Pump (35 gpm) Programmable for Daily Start Time and Duration
Total Hydrojets:	44
Seat A Jets:	4 Fluidix Reflex
Seat B Jets:	1 Vortex
Seat C Jets:	12 Fluidix-ST, 2 Fluidix Nex
Seat D Jets:	1 Fluidix Intelli-Jet, 2 Accu-Pressure
Seat E Jets:	2 Fluidix Nex, 6 Fluidix Reflex, 2 Pulsator, 2 Vortex, 6 Focus-Relief
Seat F Jets:	2 Pulsators
Footwell Jets (G):	2 Vortex
Air Blower:	High-efficiency, 1-Speed
Aromatherapy Delivery:	8 Silent Air® Injector Jets with Quiet High Speed Air Pump
Air Controls/Massage Selectors:	4/2
Filter:	MicroClean® Ultra Filtration System, 130 ft² (2 interlocking cartridge filters)
Water Treatment:	Automatic Brominator and Dynamic Flow Circulation System; Factory installed CLEARRAY® Water Purification System and CLEARRAY® PRO ₃ TECT™
Lighting:	Multicolored LED Lighting System (1 Waterfall, 1 Footwell), Exterior Corner Lights, Seat Accent Lights
Synthetic Cabinet:	Available in Coastal, Mahogany
Shell Colors:	Platinum, Celestite (Gypsum), Sahara, Monaco, Midnight, Porcelain Export: All North American Colors
Headrests:	3
Heater:	Low Flow 5.5 kW With Titanium Element Export (50 Hz): Low Flow 2.7 kW with Titanium Element
Electrical Requirements:	North America (60 Hz): 240 VAC@40A/50A or 60A; Export (50 Hz): 230-240 VAC@1x20A, 1x16A/1x20A, 3x16A (see manual for more configurations); or Suitable Rated Circuit Breaker To Comply With Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required For This Configuration.
Limited Warranty*:	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 1 Year Stereo Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 2 Years Stereo
Waterfall Feature:	Adjustable Flow Rate; Colored Lighting
Audio System (Optional):	Factory Installed BLUEWAVE® 2.0 Wireless Spa Stereo System with Auxiliary 3.5 mm headphone jack connection, Bluetooth® compatible, 4 premium speakers and a powered subwoofer
Special Features:	Factory Installed SmartTub™ module



*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 980 Lisbon

Operation/Seat Depths



- (A)** Air Control - Activates Seat A Jets (4 Fluidix Reflex) Seat B Jets (1 Vortex) and Seat F Jets (2 Pulsator)
- (B)** Massage Selector [Pump 2] - Adjusts Massage Level Between Seat C Jets + Seat B Jets and Seat A Jets
- (C)** Air Control - Activates Seat C Jets (2 Fluidix Nex, 12 Fluidix ST)
- (D)** Waterfall Selector [8-Hour Circ. Pump] - Controls Waterfall Output
- (E)** Air Control - Activates Seat E Jets (2 Fluidix Nex, 6 Fluidix Reflex, 2 Vortex, 2 Pulsators)
- (F)** Massage Selector [Pump 1] - Adjusts Massage Level Between the Seat D Jets + Footwell Jet and Seat E Jets
- (G)** Air Control - Activates Seat D (1 Fluidix Intelli-Jet, 2 Accu-Pressure) and Footwell Jets (2 Vortex)
- (H)** SunScents Dispenser

- Jets Pump 1: Seat E (2 Vortex Jets) are always on when this pump is running.
- Jets Pump 2: Seat F (2 Pulsator Jets) and Seat C (2 Nex Jets) are always on when this pump is running.

44 Total Jets




Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 24.38" (61.93 cm)
B = 22.13" (56.21 cm)
C = 27.38" (69.55 cm)
D = 26.00" (66.04 cm)

E = 26.38" (67.00 cm)
F = 16.50" (41.91 cm)
G = 30.00" (76.20 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance $\pm 0.5"$ (1.27 cm).**




Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 980 Lisbon

Portable Dimensions

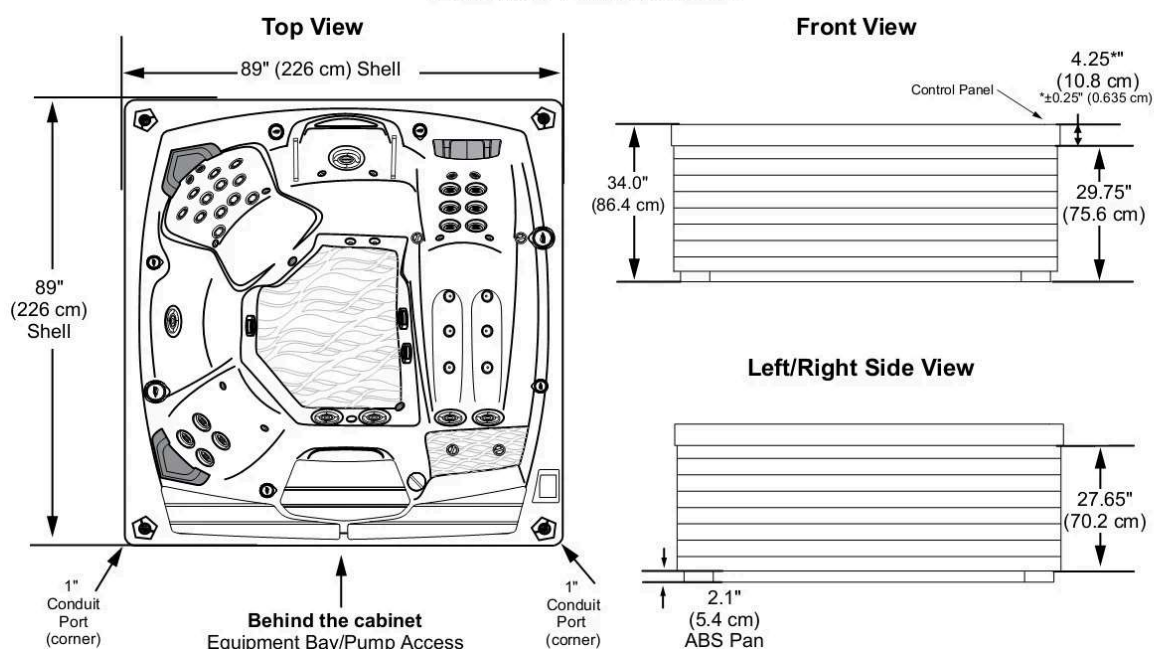

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

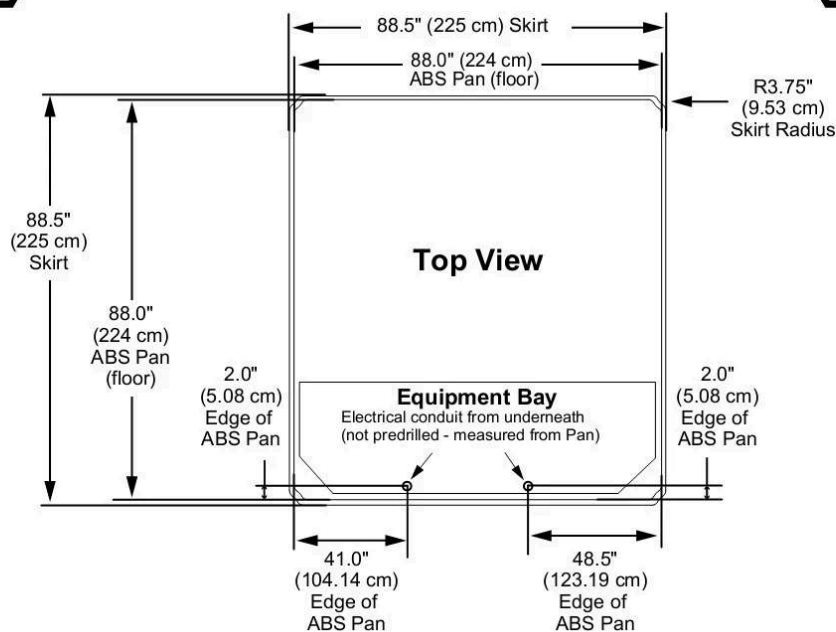

Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 980 Odessa™

Specifications

Dimensions:	89" x 89" x 34" (226 cm x 226 cm x 86.4 cm)
Seating Capacity:	6-7 Adults
Dry Weight:	813 lbs (369 kg)
Filled Weight (Spa Volume):	4,658 lbs (2,113 kg)
Filled Weight (Average Fill):	3,657 lbs (1,659 kg)
Water Capacity (Spa Volume):	461 US Gal (1,745 Liters)
Water Capacity (Average Fill):	341 US Gal (1,291 Liters)
Controls:	980 iTouch™ Glass Interface LCD Control, Displays Temperature, Time, Cycles and Jet/Air System Control. Offers Customizing of Filtration Cycles, Lighting, Water Temperature Setting and other features
Water Delivery:	2 TheraMax High-Flow Pumps and 8-Hour Dynamic Flow Circulation System
Pump 1:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.
Pump 3:	High-Output Dynamic Flow, 8-Hour Filter/Circulation Pump (35 gpm) Programmable for Daily Start Time and Duration
Total Hydrojets:	37
Seat A Jets:	2 Fluidix Nex, 4 Fluidix Reflex
Seat B Jets:	2 Fluidix Reflex
Seat C Jets:	2 Fluidix Nex, 12 Fluidix-ST, 2 Pulsator, 2 Accu-Pressure
Seat D Jets:	1 Vortex
Seat E Jets:	1 Vortex, 2 Fluidix Intelli-Jet
Seat F Jets:	1 Vortex
Seat G Jets:	2 Fluidix Nex, 2 Vortex
Footwell Jets (H):	2 Vortex
Air Blower:	High-efficiency, 1-Speed
Aromatherapy Delivery:	10 Silent Air® Injector Jets with Quiet High Speed Air Pump
Air Controls/Massage Selectors:	4/2
Filter:	MicroClean® Ultra Filtration System, 130 ft² (2 interlocking cartridge filters)
Water Treatment:	Automatic Brominator and Dynamic Flow Circulation System; Factory installed CLEARRAY® Water Purification System and CLEARRAY® PRO ₃ TECT™
Lighting:	Multicolored LED Lighting System (1 Waterfall, 1 Footwell), Exterior Corner Lights, Seat Accent Lights
Synthetic Cabinet:	Available in Coastal, Mahogany
Shell Colors:	Platinum, Celestite (Gypsum), Sahara, Monaco, Midnight, Porcelain Export: All North American Colors
Headrests:	4
Heater:	Low Flow 5.5 kW With Titanium Element Export (50 Hz): Low Flow 2.7 kW with Titanium Element
Electrical Requirements:	North America (60 Hz): 240 VAC@40A/50A or 60A; Export (50 Hz): 230-240 VAC@1x20A, 1x16A/1x20A, 3x16A (see manual for more configurations); or Suitable Rated Circuit Breaker To Comply With Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required For This Configuration.
Limited Warranty*:	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 1 Year Stereo Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 2 Years Stereo
Waterfall Feature:	Adjustable Flow Rate; Colored Lighting
Audio System (Optional):	Factory Installed BLUEWAVE® 2.0 Wireless Spa Stereo System with Auxiliary 3.5 mm headphone jack connection, Bluetooth® compatible, 4 premium speakers and a powered subwoofer
Special Features:	Factory Installed SmartTub™ module




*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 980 Odessa

Operation/Seat Depths

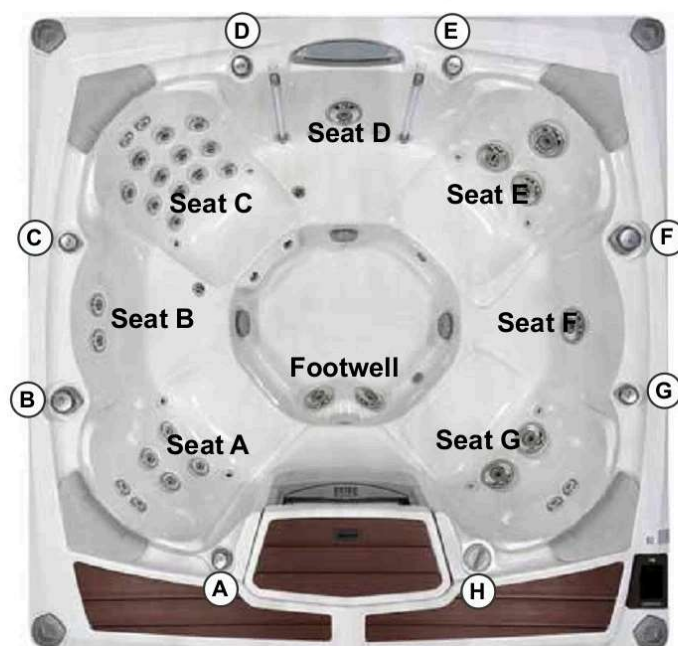

- (A)** Air Control - Activates Seat A Jets (2 Fluidix Nex, 4 Fluidix Reflex) and Seat B Jets (2 Fluidix Reflex)
- (B)** Massage Selector [Pump 2] - Adjusts Massage Level Between Seat A Jets + Seat B Jets and Seat C Jets
- (C)** Air Control - Activates Seat C Jets (2 Fluidix Nex, 12 Fluidix ST, 2 Pulsators, 2 Accu-Pressure)
- (D)** Waterfall Selector [8-Hour Circ. Pump] - Controls Waterfall Output
- (E)** Air Control - Activates Seat E Jets (1 Vortex, 2 Fluidix Intelli-Jet) and Seat D Jets (1 Vortex)
- (F)** Massage Selector [Pump 1] - Adjusts Massage Level Between the Seat E Jets and Seat G Jets
- (G)** Air Control - Activates Seat F (1 Vortex), Seat G (2 Fluidix Nex, 2 Vortex and Footwell Jets (2 Vortex))
- (H)** SunScents Dispenser

- Jets Pump 1: Seat D (1 Vortex), Seat F (1 Vortex) and Footwell Jets (2 Vortex) are always on when this pump is running
- Jets Pump 2: Seat C (2 Accu-Pressure Jets are always on when this pump is running

37 Total Jets




Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 28.13" (71.45 cm)
B = 21.00" (53.34 cm)
C = 26.50" (67.31 cm)
D = 20.75" (52.71 cm)
E = 24.50" (62.23 cm)
F = 20.25" (51.44 cm)

G = 21.88" (55.58 cm)
H = 17.13" (43.51 cm)
I = 29.13" (73.99 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5" (1.27 cm).**




Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 980 Odessa

Portable Dimensions

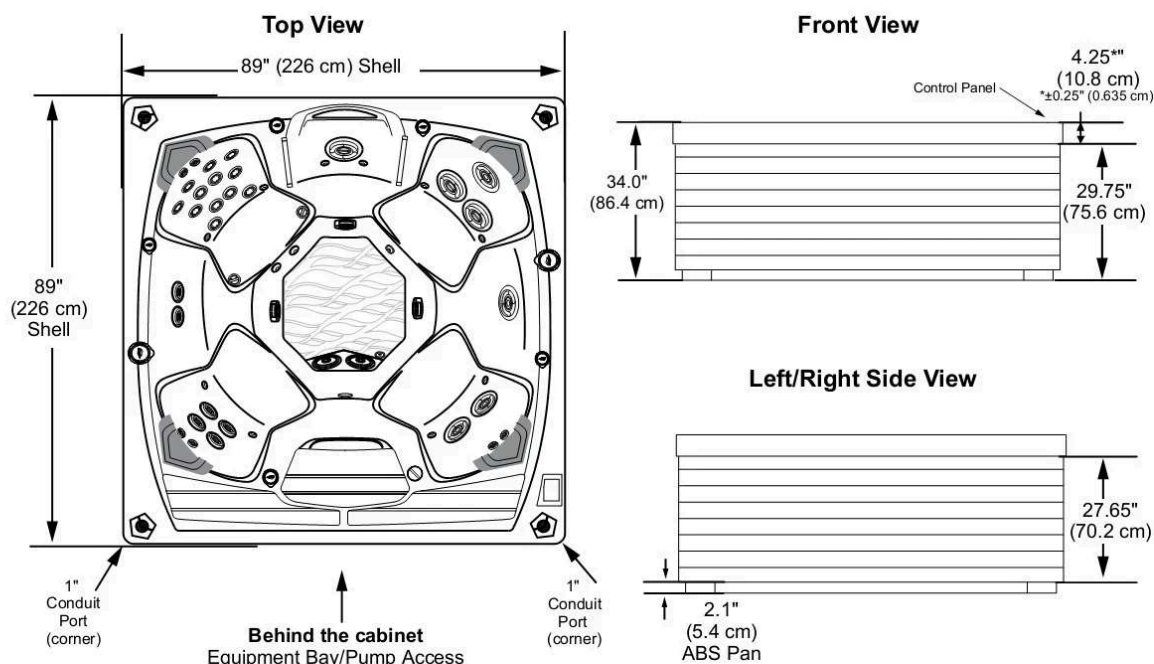


IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

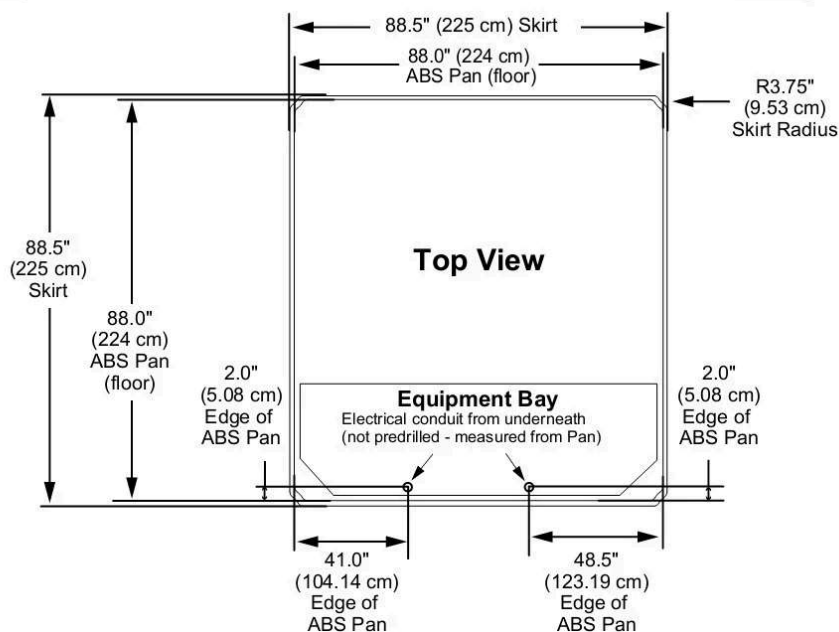

Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 880 Maxxus™ Specifications


Dimensions:	91" x 110" x 41.5" (231.14 cm x 279.4 cm x 105.41 cm)	
Seating Capacity:	6 Adults	
Dry Weight:	1,143 lbs (518.5 kg)	
Filled Weight (Spa Volume):	6,898 lbs (3,129 kg)	
Filled Weight (Average Fill):	5,647 lbs (2,561 kg)	
Water Capacity (Spa Volume):	690 US Gal (2,612 Liters)	
Water Capacity (Average Fill):	540 US Gal (2,044 Liters)	
Controls:	880 iTouch Interface LCD Control, Displays Temperature, Time, Cycles and Jet/Air System Control. Offers Customizing of Filtration Cycles, Lighting, Water Temperature Setting and other features	
Water Delivery:	3 TheraMax High-Flow Pumps and 8-Hour Dynamic Flow Circulation System	
Pump 1:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.	
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.	
Pump 3:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.	
Pump 4:	High-Output Dynamic Flow, 8-Hour Filter/Circulation Pump (35 gpm) Programmable for Daily Start Time and Duration	
Total Hydrojets:	65	
Seat A Jets:	2 Fluidix Intelli-Jet, 2 Fluidix Nex, 2 Pulsator, 8 Focus-Relief®, 3 Vortex	
Seat B Jets:	12 Fluidix-ST, 2 Fluidix Nex, 2 Pulsator, 4 Accu-Pressure, 1 Whirlpool (sidewall)	
Seat C Jets:	6 Fluidix Reflex, 2 Fluidix Nex, 2 Pulsator, 2 Accu-Pressure	
Seat D Jets:	4 Vortex, 2 Fluidix Nex, 1 Whirlpool (sidewall)	
Footwell Jets (E):	8 Accu-Pressure	
Air Blower:	High-efficiency, 1-Speed	
Aromatherapy Delivery:	6 Silent Air® Injector Jets with Quiet High Speed Air Pump	
Air Controls/Massage Selectors:	8/2 (Standard air control with LED lights and massage selector with LED lights)	
Filter:	MicroClean® Ultra Filtration System, 130 ft² (2 interlocking cartridge filters)	
Water Treatment:	Automatic Brominator and Dynamic Flow Circulation System; Factory installed CLEARRAY® Water Purification System and CLEARRAY® PRO ₃ TECT™	
Lighting:	Multicolored Sunglow LED Lighting System (2 Waterfall, 2 Footwell, 8 Air controls, 2 Massage Selectors, 2 Backlit handrails, Exterior lights)	
Skirt Cabinet (SunSide™):	Modern Hardwood, Brushed Gray and Vintage Oak (Equipped with Standard Exterior Lights)	
Shell Colors:	Platinum, Celestite (Gypsum), Sahara, Monaco, Midnight, Porcelain	
Handrails:	Two High Quality Stainless Steel with backlit LED lighting	
ComfortTone Headrests:	Four, 1-Piece Gray	
Heater:	Low Flow 5.5 kW With Titanium Element Export (50 Hz): Low Flow 5.5 kW with Titanium Element	
Electrical Requirements:	North America (60 Hz): 240 VAC@50A or 60A; Export (50 Hz): 230-240 VAC@1x40A, 2x25A, 1x25A/1x32A (see manual for more configurations); or Suitable Rated Circuit Breaker To Comply With Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required For This Configuration.	
Limited Warranty*:	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 1 Year Stereo Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 2 Years Stereo	
Waterfall Feature:	Adjustable Flow Rate; Colored Lighting	
Audio System (Optional):	Factory Installed BLUEWAVE® 2.0 Wireless Spa Stereo System with Auxiliary 3.5 mm headphone jack connection, Bluetooth® compatible, 4 premium speakers and a powered subwoofer	
Special Features:	MicroClean® Plus Versatile Filter Lid, Optional Filter Lid Pillow seat, Optional (Factory Installed) SmartTub™ Module	

*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 880 Maxxus

Operation/Seat Depths

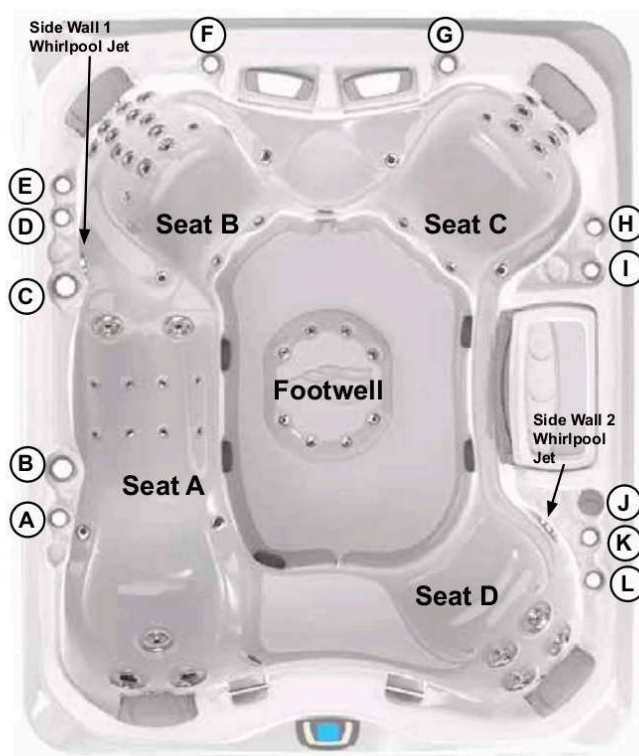

- (A)** Air Control - Activates Seat A Jets (2 Fluidix Intelli-Jet, 2 Fluidix Nex, 2 Pulsators, 3 Vortex)
- (B)** Massage Selector [Pump 2] - Adjusts Massage Level Between Seat A Jets and Seat D Jets
- (C)** Massage Selector [Pump 3] - Adjusts Massage Level Between the Seat B Jets + both Wrist Jets and Lower 4 Accu-Pressure Jets + both Side Wall Whirlpool Jets
- (D)** Air Control - Activates Mid Seat B Jets (6 Fluidix-ST, 2 Pulsators)
- (E)** Air Control - Activates Upper Seat B Jets (2 Fluidix Nex, 6 Fluidix-ST)
- (F)** Air Control - Activates Lower Seat B Jets (4 Accu-Pressure) and Side Wall 1 Whirlpool Jet
- (G)** Air Control - Activates Center Footwell Jets (8 Accu-Pressure)
- (H)** Waterfall Selector [8-Hour Circ. Pump] - Controls Waterfall Output
- (I)** Air Control - Activates Seat C Jets (2 Fluidix Nex, 2 Pulsators, 6 Fluidix Reflex, 2 Accu-Pressure)
- (J)** SunScents Dispenser
- (K)** Air Control - Activates Side Wall 2 Whirlpool Jet in Seat D
- (L)** Air Control - Activates Seat D Jets (4 Vortex, 2 Fluidix Nex)

65 Total Jets



- Jets Pump 1: Seat C Jets and Footwell Jets are always on when this pump is running
- Focus-Relief Jets: Work with both the blower and Jets Pump 2. The blower introduces air to the jet and the Jets Pump forces water through.


Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 26.00" (66.04 cm)
B = 27.00" (68.58 cm)
C = 20.00" (50.80 cm)
D = 25.50" (64.77 cm)

E = 26.00" (66.04 cm)
F = 21.00" (53.34 cm)
G = 35.00" (88.90 cm)

Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5" (1.27 cm).**

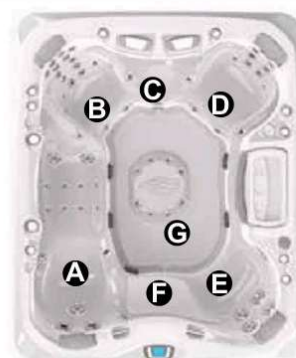

Dimensions/Specifications Subject To Change Without Notice

TOP VIEW

91.0" (231.14 cm) Shell

110.0" (279.5 cm) Shell

1" Conduit Port

FRONT

Drain right side

Equipment Bay/Pump Access behind skirt panels (CLEARRAY, Optional BLUEWAVE, and Optional SmartTub Module behind skirt panels)

Optional Audio System Speaker

FRONT/BACK VIEW

Tolerance: $\pm 0.5"$ (1.27 cm)

5.5" (13.97 cm)
* $\pm 0.25"$ (0.635 cm)

18.5" (46.99 cm)

29.25" (74.30 cm)

3.25" (8.26 cm)

73.5" (186.69 cm)

LEFT/RIGHT SIDE VIEW

Tolerance: $\pm 0.5"$ (1.27 cm)

9.0" (22.86 cm)

41.5" (105.5 cm)

36.0" (91.44 cm)

32.5" (82.55 cm)

1" Conduit Port

Approx. 8.5" (21.59 cm)

Approx. 13" (33.02 cm)

Important Panel Details

NOTE: Over time the panel(s) may bow, this is considered normal. The panels will straighten out when the panel(s) are reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

NOTE: Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

Top view

90.5" (229.87 cm) Skirt

87.57" (222.43 cm) ABS Pan (floor)

106.84" (272.87 cm) ABS Pan (floor)

109.5" (278.13 cm) Skirt

Equipment Bay
Electrical conduit from underneath (not predrilled)

8.56" (21.74 cm) Pan

R8" / R20.32 cm Skirt

7.5" / 19.05 cm

5.0" (12.7 cm)

ABS Pan

Dimensions/Specifications Subject To Change Without Notice


Sundance Spas 880 Aspen®

Specifications

Dimensions:	91" x 110" x 41.5" (231.14 cm x 279.4 cm x 105.41 cm)
Seating Capacity:	7-8 Adults
Dry Weight:	1,154 lbs (523 kg)
Filled Weight (Spa Volume):	6,784 lbs (3,077 kg)
Filled Weight (Average Fill):	5,491 lbs (2,491 kg)
Water Capacity (Spa Volume):	675 US Gal (2,555 Liters)
Water Capacity (Average Fill):	520 US Gal (1,968 Liters)
Controls:	880 iTouch Interface LCD Control, Displays Temperature, Time, Cycles and Jet/Air System Control. Offers Customizing of Filtration Cycles, Lighting, Water Temperature Setting and other features
Water Delivery:	3 TheraMax High-Flow Pumps and 8-Hour Dynamic Flow Circulation System
Pump 1:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.
Pump 3:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.
Pump 4:	High-Output Dynamic Flow, 8-Hour Filter/Circulation Pump (35 gpm) Programmable for Daily Start Time and Duration
Total Hydrojets:	66
Seat A Jets:	2 Fluidix Nex, 8 Fluidix Reflex
Seat B Jets:	2 Fluidix Reflex, 1 Fluidix Intelli-Jet
Seat C Jets:	1 Fluidix Intelli-Jet
Seat D Jets:	2 Fluidix Nex, 12 Fluidix ST, 2 Pulsator, 2 Accu-Pressure, 1 Whirlpool (sidewall)
Seat E Jets:	2 Fluidix Reflex
Seat F Jets:	2 Fluidix Nex, 2 Fluidix Reflex, 2 Fluidix Intelli-Jet, 2 Pulsator, 4 Accu-Pressure
Seat G Jets:	2 Fluidix Nex, 2 Vortex, 2 Fluidix Intelli-Jet, 4 Accu-Pressure, 1 Whirlpool (sidewall)
Footwell Jets (H):	8 Accu-Pressure
Air Blower:	High-efficiency, 1-Speed
Aromatherapy Delivery:	14 Silent Air® Injector Jets with Quiet High Speed Air Pump
Air Controls/Massage Selectors:	8/2 (Standard air control with LED lights and massage selector with LED lights)
Filter:	MicroClean® Ultra Filtration System, 130 ft² (2 interlocking cartridge filters)
Water Treatment:	Automatic Brominator and Dynamic Flow Circulation System; Factory installed CLEARARRAY® Water Purification System and CLEARARRAY® PRO ₃ TECT™
Lighting:	Multicolored Sunglow LED Lighting System (2 Waterfall, 2 Footwell, 8 Air controls, 2 Massage Selectors, 2 Backlit handrails, Exterior lights)
Skirt Cabinet (SunSide™):	Modern Hardwood, Brushed Gray and Vintage Oak (Equipped with Standard Exterior Lights)
Shell Colors:	Platinum, Sahara, Celestite (Gypsum), Monaco, Midnight, Porcelain
Handrails:	Two High Quality Stainless Steel with backlit LED lighting
ComfortTone Headrests:	Four, 1-Piece Gray
Heater:	Low Flow 5.5 kW With Titanium Element Export (50 Hz): Low Flow 5.5 kW with Titanium Element
Electrical Requirements:	North America (60 Hz): 240 VAC@50A or 60A; Export (50 Hz): 230-240 VAC@1x40A, 2x25A, 1x25A/1x32A (see manual for more configurations); or Suitable Rated Circuit Breaker To Comply With Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required For This Configuration.
Limited Warranty*:	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 1 Year Stereo Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 2 Years Stereo
Waterfall Feature:	Adjustable Flow Rate; Colored Lighting
Audio System (Optional):	Factory Installed BLUEWAVE® 2.0 Wireless Spa Stereo System with Auxiliary 3.5 mm headphone jack connection, Bluetooth® compatible, 4 premium speakers and a powered subwoofer
Special Features:	MicroClean® Plus Versatile Filter Lid, Optional Filter Lid Pillow seat, Optional (Factory Installed) SmartTub™ Module


*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice



Sundance Spas 880 Aspen

Operation/Seat Depths

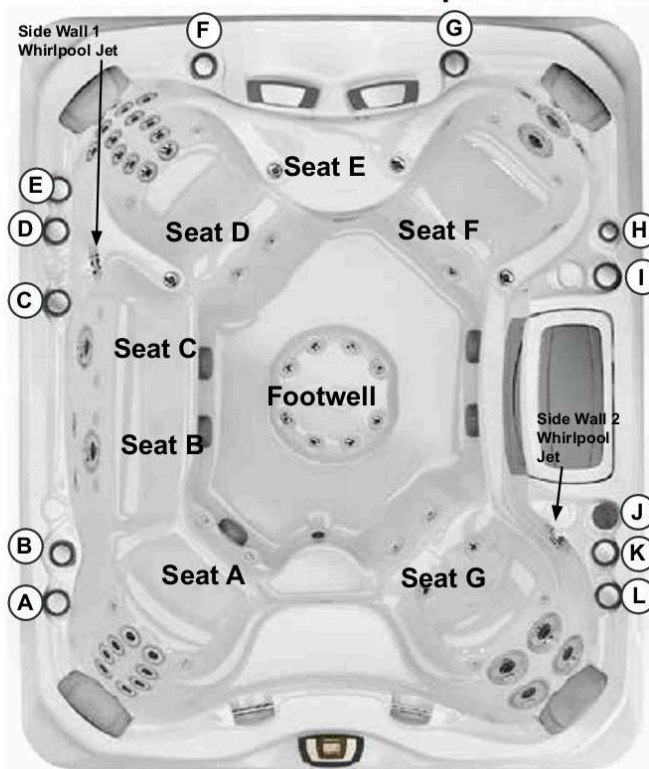

- (A) Air Control - Activates Seat A Jets (2 Fluidix Nex, 8 Fluidix Reflex), Seat B Jets (2 Fluidix Reflex, 1 Fluidix Intelli-Jet) and Seat C Jet (1 Fluidix Intelli-Jet)
- (B) Massage Selector [Pump 1] - Adjusts Massage Level Between Seat A Jets + Seat B Jets + Seat C Jets and both Side Wall Whirlpool Jets
- (C) Air Control - Activates Side Wall 1 Whirlpool Jet
- (D) Air Control - Activates Lower Seat D Jets (6 Fluidix-ST, 2 Pulsators, 2 Accu-Pressure)
- (E) Air Control - Activates Upper Seat D Jets (2 Fluidix Nex, 6 Fluidix-ST)
- (F) Massage Selector [Pump 2] - Adjusts Massage Level Between Seat D Jets and Seat G Jets
- (G) Air Control - Activates Seat E (2 Fluidix Reflex) + Seat F Jets (2 Fluidix Nex, 2 Fluidix Reflex, 2 Fluidix Intelli-Jets, 2 Pulsators, 4 Accu-Pressure)
- (H) Waterfall Selector [8-Hour Circ. Pump] - Controls Waterfall Output
- (I) Air Control - Activates Center Footwell Jets (8 Accu-Pressure)
- (J) SunScents Dispenser
- (K) Air Control - Activates Side Wall 2 Whirlpool Jet
- (L) Air Control - Activates Seat G Jets (2 Fluidix Nex, 2 Vortex, 2 Fluidix Intelli-Jet, 4 Accu-Pressure)

66 Total Jets



- Jets Pump 3: Seat E Jets, Seat F Jets and Footwell Jets are always on when this pump is running


Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 26.50" (67.31 cm)
 B = 26.00" (66.04 cm)
 C = 26.00" (66.04 cm)
 D = 27.63" (70.15 cm)
 E = 21.38" (54.31 cm)
 F = 26.50" (67.31 cm)

G = 25.75" (65.41 cm)
 H = 16.38" (41.61 cm)
 I = 36.00" (91.44 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5" (1.27 cm).**

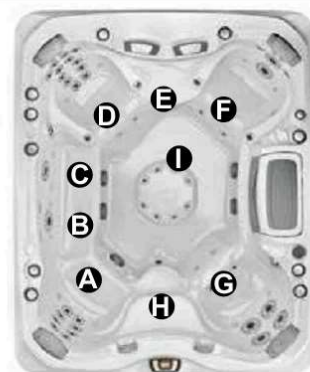


Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 880 Aspen

Portable Dimensions

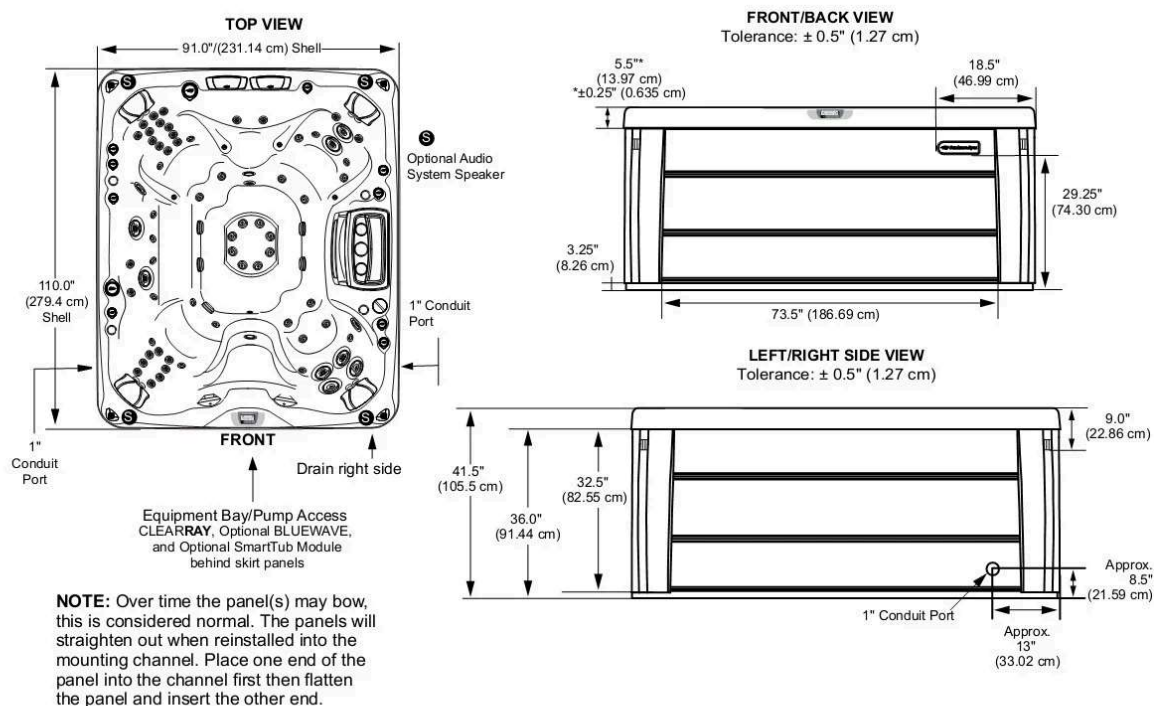

IMPORTANT! Always measure each hot tub for exact dimensions **BEFORE** designing its foundational support and/or decking.

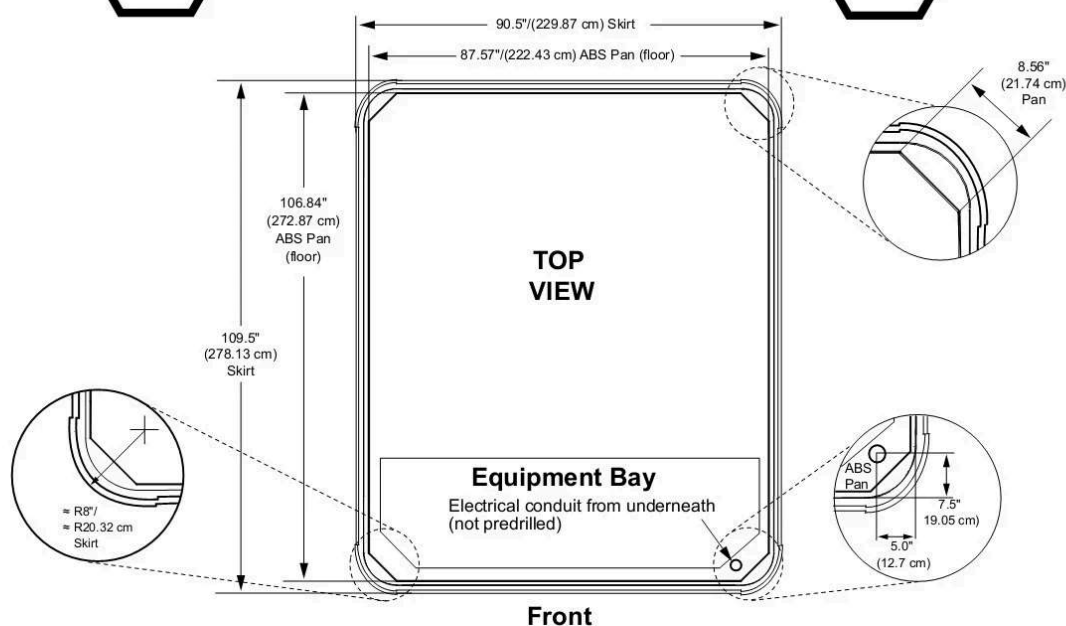

Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 880 Optima®

Specifications

Dimensions:	89" x 89" x 37.5" (226 cm x 226 cm x 95.25 cm)
Seating Capacity:	6-7 Adults
Dry Weight:	924 lbs (419 kg)
Filled Weight (Spa Volume):	5,344 lbs (2,424 kg)
Filled Weight (Average Fill):	4,343 lbs (1,970 kg)
Water Capacity (Spa Volume):	530 US Gal (2,006 Liters)
Water Capacity (Average Fill):	410 US Gal (1,552 Liters)
Controls:	880 iTouch Interface LCD Control, Displays Temperature, Time, Cycles and Jet/Air System Control. Offers Customizing of Filtration Cycles, Lighting, Water Temperature Setting and other features
Water Delivery:	2 TheraMax High-Flow Pumps and 8-Hour Dynamic Flow Circulation System
Pump 1:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7.0A Max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7.0A Max.
Pump 3:	High Output Dynamic Flow, 8-Hour Filter/Circulation Pump (35 gpm); Programmable for Daily Start Time and Duration
Total Hydrojets:	47
Seat A Jets:	3 Fluidix Intelli-Jet
Seat B Jets:	2 Vortex
Seat C Jets:	12 Fluidix ST, 2 Fluidix Nex, 1 Whirlpool (sidewall), 4 Accu-Pressure, 2 Pulsator
Rear Wall Jet (D):	1 Vortex
Seat E Jets:	2 Fluidix Intelli-Jet, 2 Fluidix Nex, 4 Fluidix ST
Seat F Jets:	4 Vortex
Footwell Jets (G):	8 Accu-Pressure
Air Blower:	High-Efficiency, 1-Speed
Aromatherapy Delivery:	14 Air Injector Jets with Quiet High Speed Air Pump
Air Controls/Massage Selectors:	5/2 (Standard air control with LED lights and massage selector with LED lights)
Filter:	MicroClean® Ultra Filtration System, 130 ft² (2 interlocking cartridge filters)
Water Treatment:	Automatic Brominator and Dynamic Flow Circulation System; Factory installed CLEARRAY® Water Purification System and CLEARRAY® PRO ₃ TECT™
Lighting:	Multi-Colored Sunglow LED Lighting System (1 Waterfall, 1 Footwell, 5 Air controls, 2 Massage Selectors, 2 Backlit handrails, Exterior lights)
Skirt Cabinet (SunSide™):	Modern Hardwood, Brushed Gray and Vintage Oak (Equipped with Standard Exterior Lights)
Shell Colors:	North America(60 Hz): Platinum, Celestite (Gypsum), Sahara, Monaco, Midnight, Porcelain Export (50 Hz): All North America Colors
Handrails:	Two High Quality Stainless Steel with backlit LED lighting
ComfortTone Headrests:	Four, 1-Piece Gray
Heater:	North America (60 Hz): Low Flow 5.5 kW with Titanium Element Export (50 Hz): Low Flow 2.7 kW with Titanium Element
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A or 60A; Export (50 Hz): 230-240 VAC@1x432A or 1x16A/1x32A, 1x20A/1x16A, 3x16A (see manual for more configurations); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries may Require 2 Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.
Limited Warranty*:	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Synthetic Cabinet, 5 Years Jets, 2 Years Lights, 1 Year Stereo Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Synthetic Cabinet, 5 Years Jets, 2 Years Lights, 2 Years Stereo
Waterfall Feature:	Adjustable Flow Rate; Colored Lighting
Audio System (Optional):	Factory Installed BLUEWAVE® 2.0 Wireless Spa Stereo System with Auxiliary 3.5 mm headphone jack connection, Bluetooth® compatible, 4 premium speakers and a powered subwoofer
Special Features:	MicroClean® Plus Versatile Filter Lid, Optional Filter Lid Pillow seat, Optional (Factory Installed) SmartTub™ Module




*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 880 Optima

Operation/Seat Depths

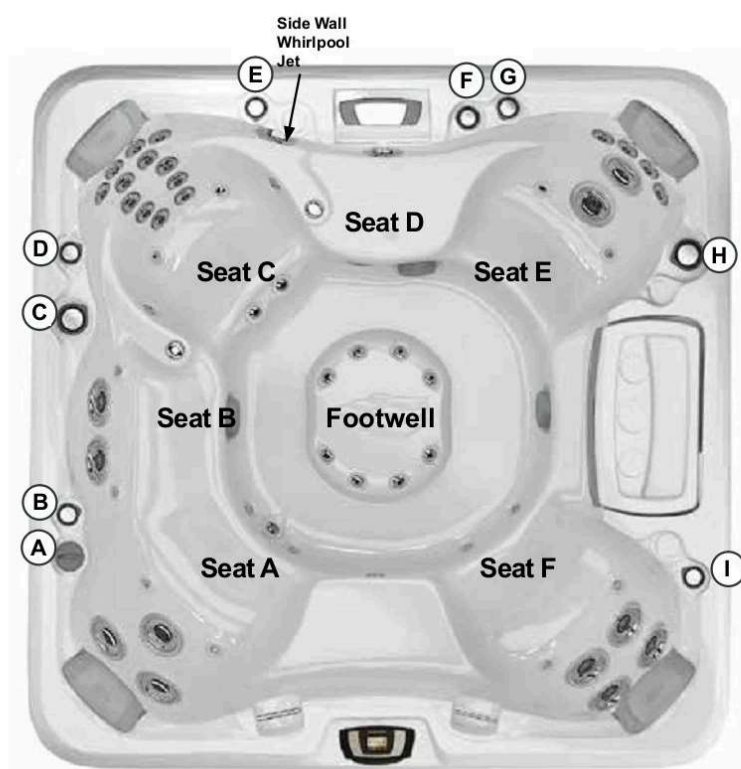

- (A)** Suncsent Dispenser
- (B)** Air Control - Activates Seat A Jets (3 Fluidix Intelli-Jet) + Seat B Jets (2 Vortex) + Side Wall Whirlpool Jet
- (C)** Massage Selector [Pump 2] - Adjusts Massage Level Between Seat C Jets (except 4 Accu-Pressure) and Footwell Jets + Rear Wall Jet
- (D)** Air Control - Activates Upper Eight Seat C Jets (2 Fluidix Nex, 6 Fluidix-ST)
- (E)** Air Control - Activates Lower Twelve Seat C Jets (6 Fluidix-ST, 4 Accu-Pressure, 2 Pulsators)
- (F)** Waterfall Selector [8-Hour Circ. Pump] - Controls Waterfall Output
- (G)** Air Control - Activates Seat E Jets (2 Fluidix Nex, 4 Fluidix-ST, 2 Fluidix Intelli-Jet) + Seat F Jets (4 Vortex)
- (H)** Massage Selector [Pump 1] - Adjusts Massage Level Between Seat A Jets + Side Wall Whirlpool and Seat E Jets + Seat F Jets
- (I)** Air Control - Activates Seat D Rear Wall Jet (1 Vortex) + Footwell Jets (8 Accu-Pressure)

47 Total Jets



- Jets Pump 1: Seat B Jets are always on when this pump is running
- Jets Pump 2: The 4 Accu-Pressure Jets in the Seat C are always on when this pump is running

Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 25.00" (63.50 cm)
B = 22.00" (55.88 cm)
C = 28.00" (71.12 cm)
D = 25.00" (63.50 cm)
E = 26.00" (66.04 cm)
F = 25.00" (63.50 cm)

G = 17.00" (43.18 cm)
H = 32.00" (81.28 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance $\pm 0.5"$ (1.27 cm).**




Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 880 Optima

Portable Dimensions

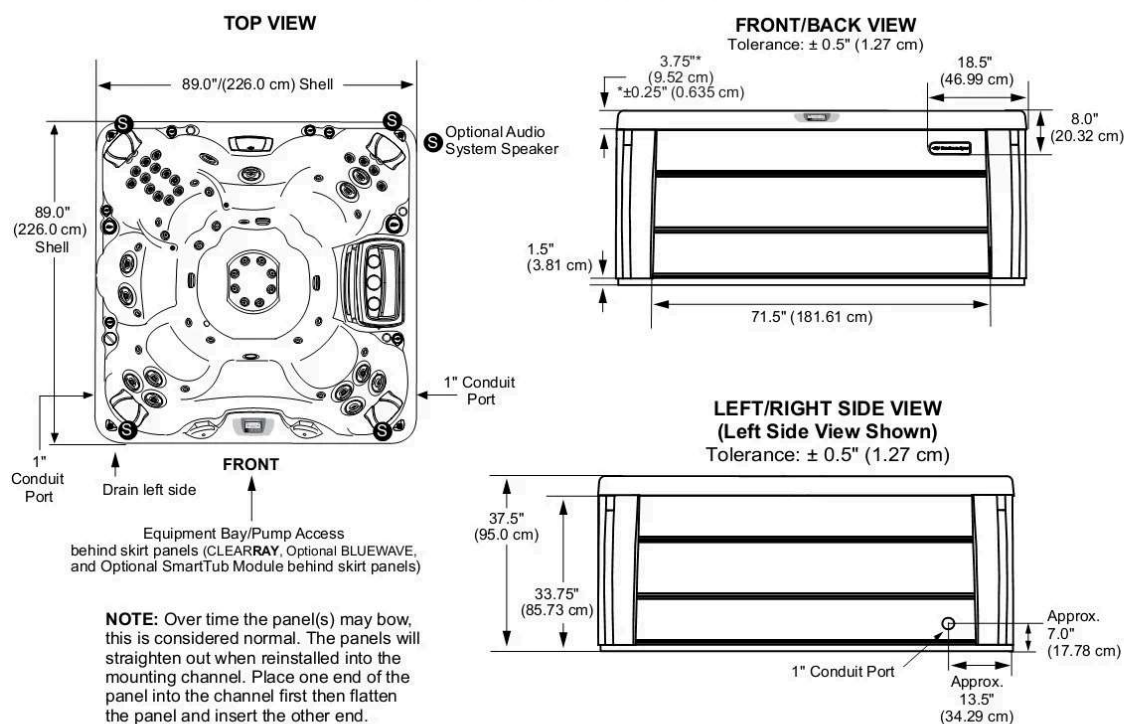

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

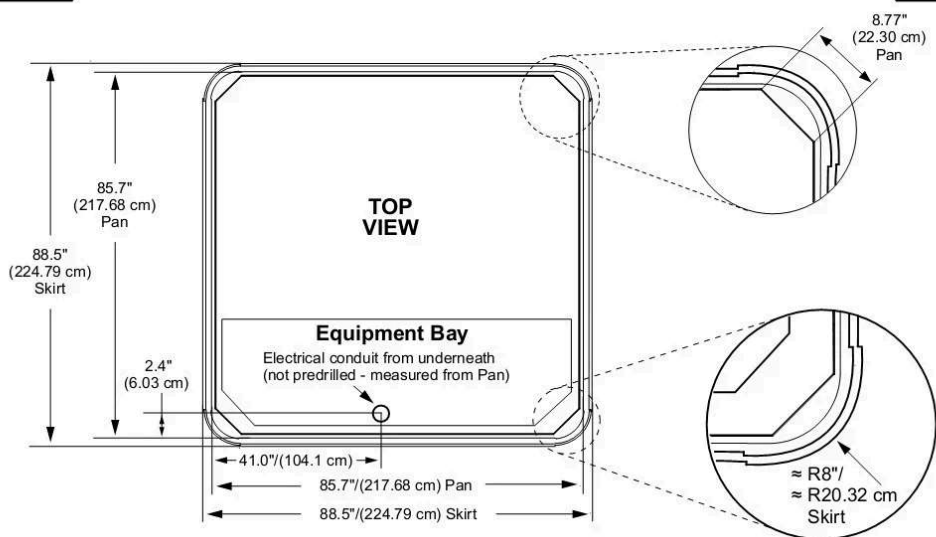


Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 880 Cameo®

Specifications

Dimensions:	89" x 89" x 37.5" (226 cm x 226 cm x 95.25 cm)
Seating Capacity:	5-6 Adults
Dry Weight:	962 lbs (436 kg)
Filled Weight (Spa Volume):	4,882 lbs (2,214 kg)
Filled Weight (Average Fill):	4,048 lbs (1,836 kg)
Water Capacity (Spa Volume):	470 US Gal (1,779 Liters)
Water Capacity (Average Fill):	370 US Gal (1,401 Liters)
Controls:	880 Touch Interface LCD Control, Displays Temperature, Time, Cycles and Jet/Air System Control. Offers Customizing of Filtration Cycles, Lighting, Water Temperature Setting and other features
Water Delivery:	2 TheraMax High Flow Pumps and 8-Hour Dynamic Flow Circulation System
Pump 1:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7.0A Max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7.0A Max.
Pump 3:	High Output Dynamic Flow, 8-Hour Filter/Circulation Pump (35 gpm) Programmable for Daily Start Time and Duration
Total Hydrojets:	54
Seat A Jets:	2 Fluidix Nex, 12 Fluidix-ST, 2 Accu-Pressure, 2 Pulsator
Seat B Jets:	1 Whirlpool
Seat C Jets:	2 Fluidix Nex, 6 Fluidix Reflex, 2 Pulsator, 2 Accu-Pressure, 2 Vortex, 8 Focus-Relief®
Seat D Jets:	2 Vortex
Seat E Jets:	2 Vortex, 2 Fluidix Intelli-Jet, 2 Accu-Pressure, 2 Fluidix Nex
Footwell Jets (F):	3 Whirlpool
Air Blower:	High-Efficiency, 1-Speed
Aromatherapy Delivery:	6 Air Injector Jets with Quiet High Speed Air Pump
Air Controls/Massage Selectors:	5/2 (Standard air control with LED lights and massage selector with LED lights)
Filter:	MicroClean® Ultra Filtration System, 130 ft² (2 interlocking cartridge filters)
Water Treatment:	Automatic Brominator and Dynamic Flow Circulation System; Factory installed CLEARARRAY® Water Purification System and CLEARARRAY® PRO ₃ TECT™
Lighting:	Multi-Colored Sunglow LED Lighting System (1 Waterfall, 1 Footwell, 5 Air control, 2 Massage Selectors, 2 Backlit handrails, Exterior lights)
Skirt Cabinet (SunSide™):	Modern Hardwood, Brushed Gray and Vintage Oak (Equipped with Standard Exterior Lights)
Shell Colors:	North America: Platinum, Celestite (Gypsum), Sahara, Monaco, Midnight, Porcelain Export (50 Hz): All North America Colors
Handrails:	Two High Quality Stainless Steel with backlit LED lighting
Comfortone Headrests:	Three, 1-Piece Gray
Heater:	North America (60 Hz): Low Flow 5.5 kW with Titanium Element Export (50 Hz): Low Flow 2.7 kW with Titanium Element
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A or 60A; Export (50 Hz): 230-240 VAC@1x40A or 1x16A/1x32A, 1x20A/1x16A, 3x16A (see manual for more configurations); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries may Require 2 Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.
Limited Warranty*:	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Synthetic Cabinet, 5 Years Jets, 2 Years Lights, 1 Year Stereo Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Synthetic Cabinet, 5 Years Jets, 2 Years Lights, 2 Years Stereo
Waterfall Feature:	Adjustable Flow Rate; Colored Lighting
Audio System (Optional):	Factory Installed BLUEWAVE® 2.0 Wireless Spa Stereo System with Auxiliary 3.5 mm headphone jack connection, Bluetooth® compatible, 4 premium speakers and a powered subwoofer
Special Features:	MicroClean® Plus Versatile Filter Lid, Optional Filter Lid Pillow seat, Optional (Factory Installed) SmartTub™ Module



*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 880 Cameo

Operation/Seat Depths



- (A)** Air Control - Activates Upper Eight Seat A Jets (2 Fluidix Nex, 6 Fluidix-ST)
- (B)** Air Control - Activates Lower Seat A Jets (6 Fluidix-ST, 2 Accu-Pressure, 2 Pulsator) + Seat D Jets (2 Vortex)
- (C)** Massage Selector [Pump 1] - Adjusts Massage Level Between Footwell Jets and Seat A Jets + Seat D Jets
- (D)** Sunscents Dispenser
- (E)** Waterfall Selector [8-Hour Circ. Pump] - Controls Waterfall Output
- (F)** Air Control - Activates Seat C Jets (2 Fluidix Nex, 6 Fluidix Reflex, 2 Accu-Pressure, 2 Pulsator, 2 Vortex) + Lower Four Seat E Jets (2 Fluidix Intelli-Jet, 2 Accu-Pressure) + Upper Two Seat E Jets (2 Fluidix Nex)
- (G)** Air Control - Activates the Footwell Jets (3 Whirlpool)
- (H)** Massage Selector [Pump 2] - Adjusts Massage Level Between Seat E Jets + Seat B and Seat C Jets
- (I)** Air Control - Activates Upper 2 Seat E Jets (2 Vortex) + Seat B Jet (1 Whirlpool)

54 Total Jets



- Focus-Relief Jets: Work with both the blower and Jets Pump 2. The blower introduces air to the jet and the Jets Pump forces water through.

Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 28.00" (71.12 cm)
B = 7.50" (19.05 cm)
C = 20.00" (50.80 cm)
D = 26.00" (66.04 cm)
E = 24.50" (62.23 cm)
F = 24.50" (62.23 cm)

G = 17.00" (43.18 cm)
H = 31.00" (78.74 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5" (1.27 cm).**




Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 880 Cameo

Portable Dimensions

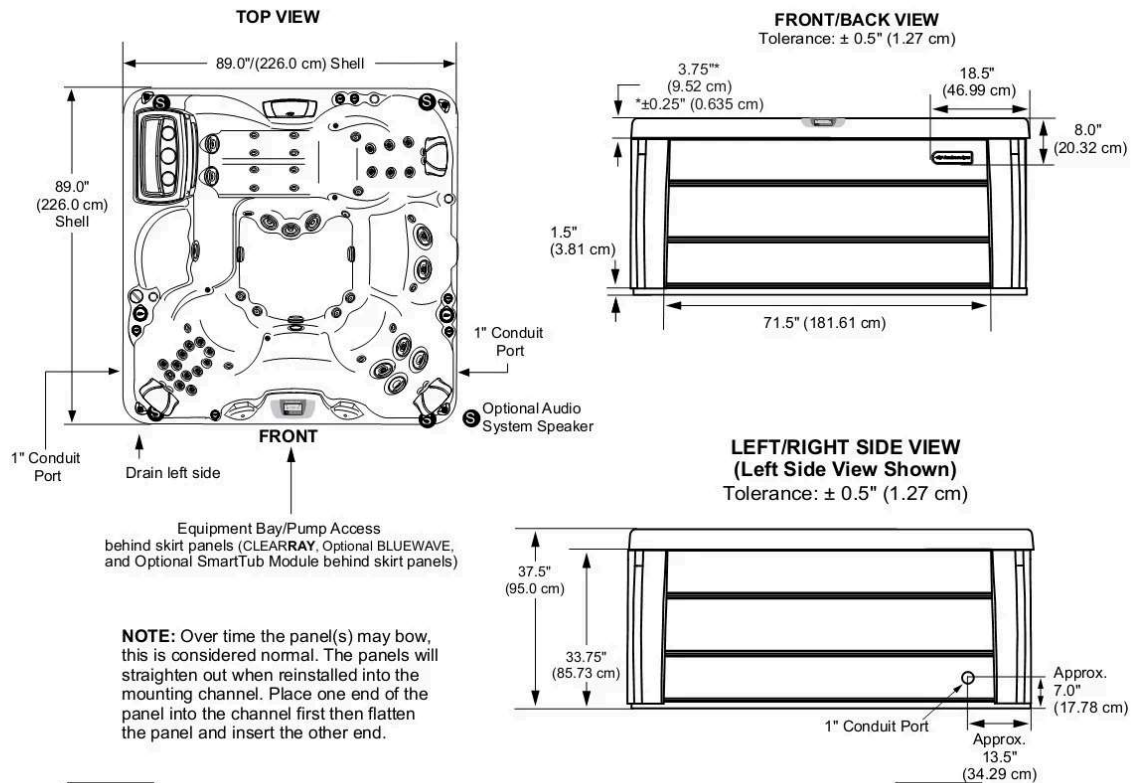

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

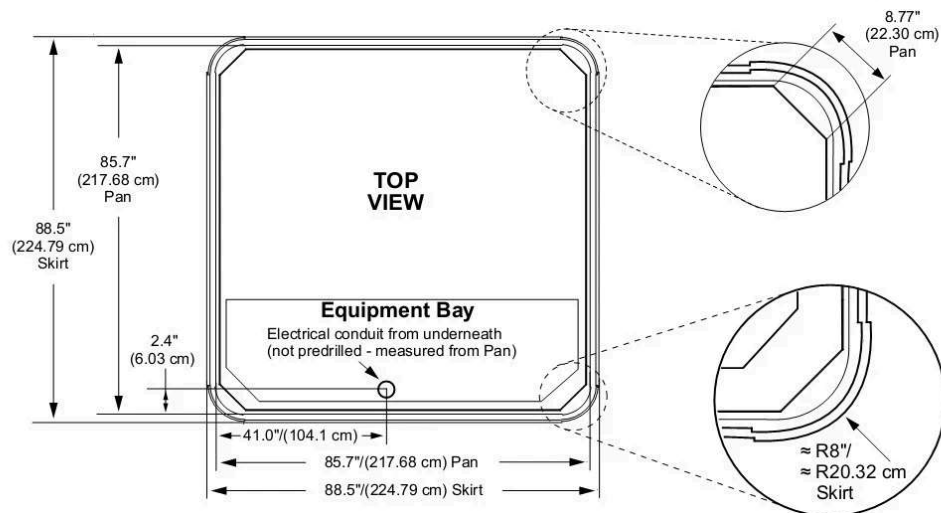

Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 880 Altamar®

Specifications

Dimensions:	81" x 86" x 37.5" (206 cm x 218.5 cm x 95.25 cm)
Seating Capacity:	5-6 Adults
Dry Weight:	875 lbs (397 kg)
Filled Weight (Spa Volume):	4,878 lbs (2,213 kg)
Filled Weight (Average Fill):	4,128 lbs (1,872 kg)
Water Capacity (Spa Volume):	480 US Gal (1,817 Liter)
Water Capacity (Average Fill):	390 US Gal (1,476 Liter)
Controls:	880 iTouch Interface LCD Control, Displays Temperature, Time, Cycles and Jet/Air System Control. Offers Customizing of Filtration Cycles, Lighting, Water Temperature Setting and other features
Water Delivery:	2 TheraMax High-Flow Pumps and 8-Hour Dynamic Flow Circulation System
Pump 1:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7.0A Max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7.0A Max.
Pump 3:	High Output Dynamic Flow, 8-Hour Filter/Circulation Pump (35 gpm) Programmable for Daily Start Time and Duration
Total Hydrojets:	41
Seat A Jets:	6 Fluidix Reflex Jets, 2 Pulsator, 2 Fluidix Intelli-Jet, 6 Focus-Relief®
Seat B Jets:	2 Fluidix Intelli-Jet
Seat C Jets:	2 Fluidix Nex, 2 Vortex, 2 Fluidix Intelli-Jet
Seat D Jet:	1 Vortex
Seat E Jets:	12 Fluidix ST, 2 Fluidix Nex
Footwell Jets (F):	2 Whirlpool
Air Blower:	High-Efficiency, 1-Speed
Aromatherapy Delivery:	8 Air Injector Jets with Quiet High Speed Air Pump
Air Controls/Massage Selectors:	5/1 (Standard air control and massage selector LED lights)
Filter:	MicroClean® Ultra Filtration System, 130 ft² (2 interlocking cartridge filters)
Water Treatment:	Automatic Brominator and Dynamic Flow Circulation System; Factory installed CLEARRAY® Water Purification System and CLEARRAY® PRO ₃ TECT™
Lighting:	Multi-Colored Sunglow LED Lighting System (1 Waterfall, 1 Footwell, 5 Air controls, 1 Massage Selectors, 1 Backlit handrails, Exterior lights)
Skirt Cabinet (SunSide™):	Modern Hardwood, Brushed Gray and Vintage Oak (Equipped with Standard Exterior Lights)
Shell Colors:	North America (60 Hz): Platinum, Celestite (Gypsum), Sahara, Monaco, Midnight, Porcelain Export (50 Hz): All North America Colors
Handrails:	One High Quality Stainless Steel with a backlit LED light
Comfortone Headrests:	Three, 1-Piece Gray
Heater:	North America (60 Hz): Low Flow 5.5 kW with Titanium Element Export (50 Hz): Low Flow 2.7 kW with Titanium Element
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A or 60A; Export (50 Hz): 230-240 VAC@1x40A or 1x16A/1x32A, 1x20A/1x16A, 3x16A (see manual for more configurations); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries may Require 2 Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.
Limited Warranty*:	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 1 Year Stereo Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 2 Years Stereo
Waterfall Feature:	Adjustable Flow Rate; Colored Lighting
Audio System (Optional):	Factory Installed BLUEWAVE® 2.0 Wireless Spa Stereo System with Auxiliary 3.5 mm headphone jack connection, Bluetooth® compatible, 4 premium speakers and a powered subwoofer
Special Features:	MicroClean® Plus Versatile Filter Lid, Optional Filter Lid Pillow seat, Optional (Factory Installed) SmartTub™ Module



*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice


Sundance Spas 880 Altamar

Operation/Seat Depths



- (A)** Air Control - Activates Seat A Jets (6 Fluidix Reflex, 2 Pulsator, 2 Fluidix Intelli-Jet)
- (B)** Sunscents Dispenser
- (C)** Air Control - Activates Seat B Jets (2 Fluidix Intelli-Jet) + Seat A Jets (2 Fluidix Nex, 2 Vortex, 2 Fluidix Intelli-Jet)
- (D)** Air Control - Activates Seat D Jet (1 Whirlpool) + Footwell Jets (2 Whirlpool)
- (E)** Waterfall Selector [8-Hour Circ. Pump] - Controls Waterfall Output
- (F)** Air Control - Activates Lower Six Seat E Jets (6 Fluidix-ST)
- (G)** Air Control - Activates Upper Eight Seat E Jets (2 Fluidix Nex, 6 Fluidix-ST)
- (H)** Massage Selector [Pump 2] - Adjusts Massage Level Between Seat B Jets + Seat E Jets and Seat D Jet + Footwell Whirlpool Jets

41 Total Jets

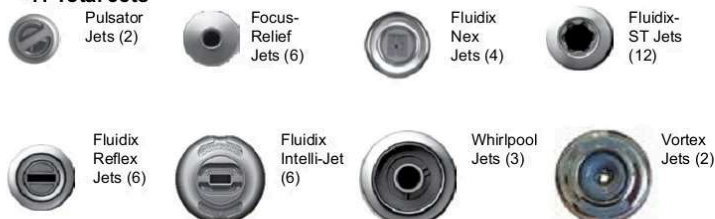

• Jets Pump 1: Seat A Jets + Seat C Jets are always on when this pump is running.

• Focus-Relief Jets: Work with both the blower and Jets Pump 1. The blower introduces air to the jet and the Jets Pump forces water through.

Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 26.00" (66.04 cm)

B = 27.00" (68.58 cm)

C = 28.00" (71.12 cm)

D = 23.00" (58.42 cm)

E = 28.00" (71.12 cm)

F = 20.00" (50.80 cm)

G = 30.00" (76.20 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance $\pm 0.5"$ (1.27 cm).**




Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 880 Altamar

Portable Dimensions

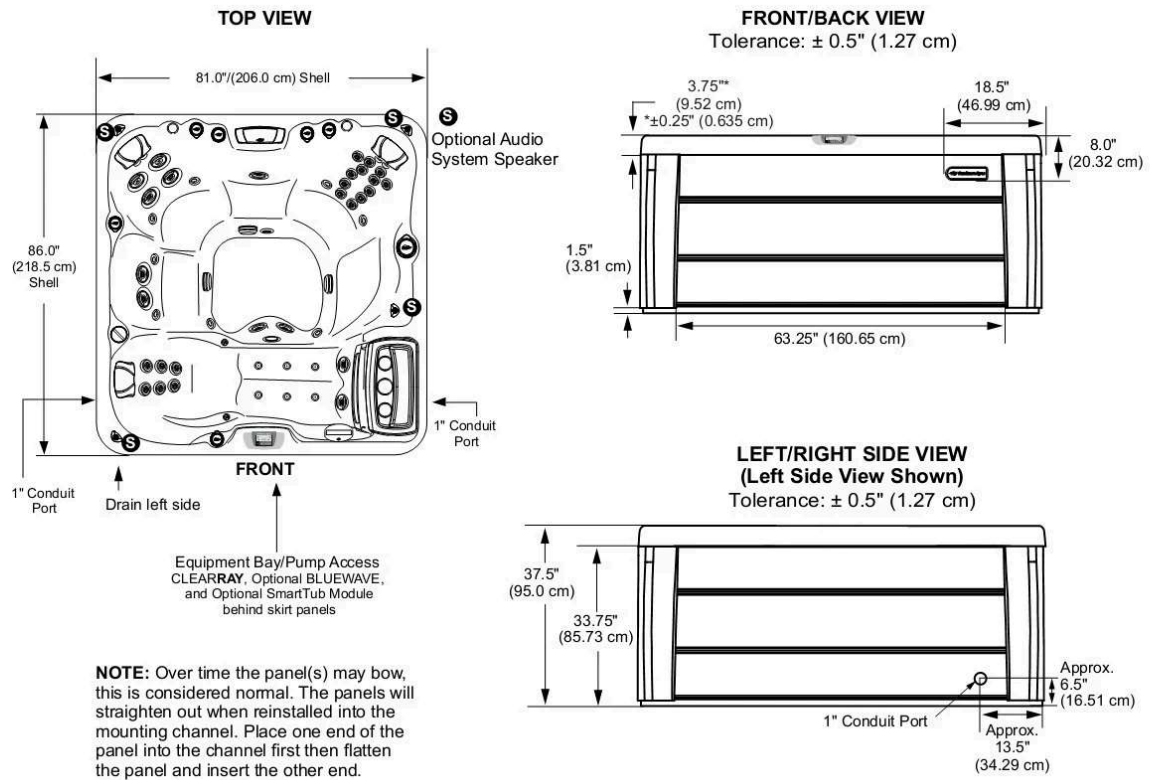

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

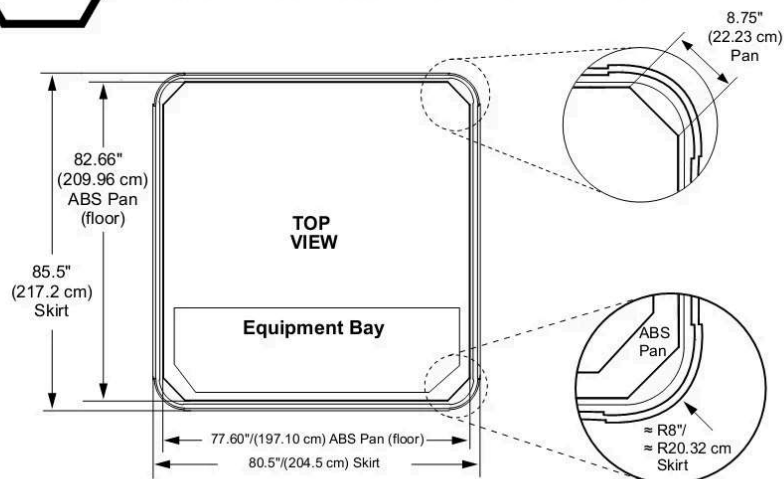


Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 880 Marin®

Specifications

Dimensions:	76" x 91" x 34" (193.04 cm x 231 cm x 86.36 cm)
Seating Capacity:	4-5 Adults
Dry Weight:	803 lbs (364.23 kg)
Filled Weight (Spa Volume):	4,222 lbs (1,915 kg)
Filled Weight (Average Fill):	3,472 lbs (1,575 kg)
Water Capacity (Spa Volume):	410 US Gal (1,552 Liters)
Water Capacity (Average Fill):	320 US Gal (1,211 Liters)
Controls:	880 iTouch Interface LCD Control, Displays Temperature, Time, Cycles and Jet/Air System Control. Offers Customizing of Filtration Cycles, Lighting, Water Temperature Setting and other features
Water Delivery:	2 TheraMax High-Flow Pumps and 8-Hour Dynamic Flow Circulation System
Pump 1:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7.0A Max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7.0A Max.
Pump 3:	High Output Dynamic Flow, 8-Hour Filter/Circulation Pump (35 gpm) Programmable for Daily Start Time and Duration
Total Hydrojets:	45
Seat A Jets:	6 Fluidix Reflex, 2 Vortex, 2 Pulsator, 6 Focus-Relief®
Seat B Jets:	2 Vortex, 4 Focus-Relief
Seat C Jets:	2 Fluidix Nex, 12 Fluidix ST, 2 Accu-Pressure
Seat D Jets:	2 Fluidix Nex, 1 Vortex, 2 Fluidix Intelli-Jet
Footwell Jets (E):	2 Vortex
Air Blower:	High-Efficiency, 1-Speed
Aromatherapy Delivery:	4 Air Injector Jets with Quiet High Speed Air Pump
Air Controls/Massage Selectors:	4/1 (Standard air control with LED lights and massage selector with LED lights)
Filter:	MicroClean® Ultra Filtration System, 130 ft² (2 interlocking cartridge filters)
Water Treatment:	Automatic Brominator and Dynamic Flow Circulation System; Factory installed CLEARRAY® Water Purification System and CLEARRAY® PRO ₃ TTECT™
Lighting:	Multi-Colored LED Lighting System (1 Waterfall, 1 Main Light, 4 Air controls, 1 Massage Selector, Exterior lights)
Skirt Cabinet (SunSide™):	Modern Hardwood, Brushed Gray and Vintage Oak (Equipped with Standard Exterior Lights)
Shell Colors:	North America: Platinum, Celestite (Gypsum), Sahara, Monaco, Midnight, Porcelain Export (50 Hz): All North America Colors
Handrails:	None
Headrests:	Four, 1-Piece Gray
Heater:	North America (60 Hz): Low Flow 5.5 kW with Titanium Element Export (50 Hz): Low Flow 2.7 kW with Titanium Element
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A or 60A; Export (50 Hz): 230-240 VAC@1x40A or 1x16A/1x32A, 1x20A/1x16A, 3x16A (see manual for more configurations); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.
Limited Warranty*:	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 1 Year Stereo Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 2 Years Stereo
Waterfall Feature:	Adjustable Flow Rate; Colored Lighting
Audio System (Optional):	Factory Installed BLUEWAVE® 2.0 Wireless Spa Stereo System with Auxiliary 3.5 mm headphone jack connection, Bluetooth® compatible, 4 premium speakers and a powered subwoofer
Special Features:	MicroClean® Plus Versatile Filter Lid, Optional Filter Lid Pillow seat, Optional (Factory Installed) SmartTub™ Module




*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 880 Marin

Operation/Seat Depths

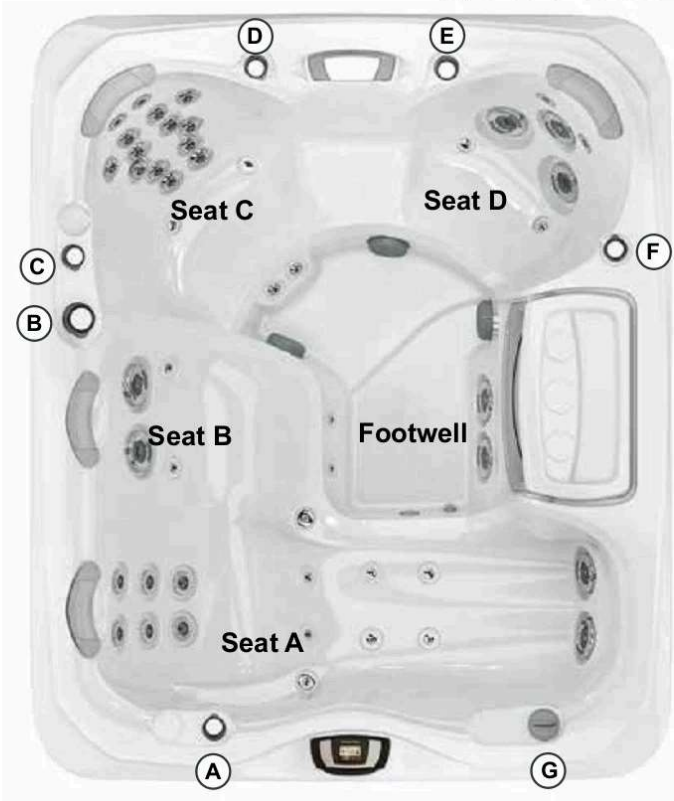

Filter Lid is shown with aftermarket seat pillow

45 Total Jets



- (A)** Air Control - Activates Seat A Jets (6 Fluidix Reflex, 2 Pulsator, 2 Vortex)
- (B)** Massage Selector [Pump 2] - Adjusts Massage Level Between Seat A Jets and Seat C Jets
- (C)** Air Control - Activates Seat C Upper 8 Jets (2 Fluidix Nex, 6 Fluidix ST)
- (D)** Air Control - Activates Seat C Lower 8 Jets (6 Fluidix-ST, 2- Accu-Pressure)
- (E)** Waterfall Selector [8-Hour Circ. Pump] - Controls Waterfall Output
- (F)** Air Control - Activates Seat B Jets (2 Vortex) + Seat D Jets (2 Fluidix Nex, 1 Vortex, 2 Fluidix Intelli-Jet) + Footwell Jets (2 Vortex)
- (G)** Scent Dispenser

- Jets Pump 1: Seat B Jets + Seat D Jets + Footwell Jets are always on when this pump is running
- Focus-Relief Jets: Work with both the blower and Jets Pump 2. The blower introduces air to the jet and the Jets Pump forces water through.


Spa Operation Subject To Change Without Notice

SEAT DEPTHS

- A = 25.75" (65.40 cm)**
- B = 24.50" (62.23 cm)**
- C = 27.75" (70.48 cm)**
- D = 22.00" (55.88 cm)**
- E = 25.50" (64.77 cm)**
- F = 29.50" (74.93 cm)**

G = 31.25" (79.37 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5" (1.27 cm).**

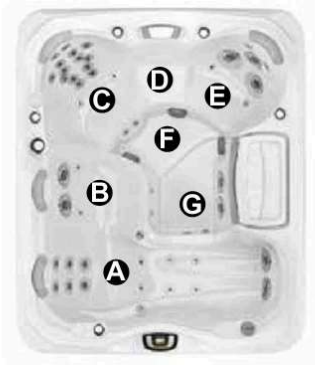


Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 880 Marin

Portable Dimensions

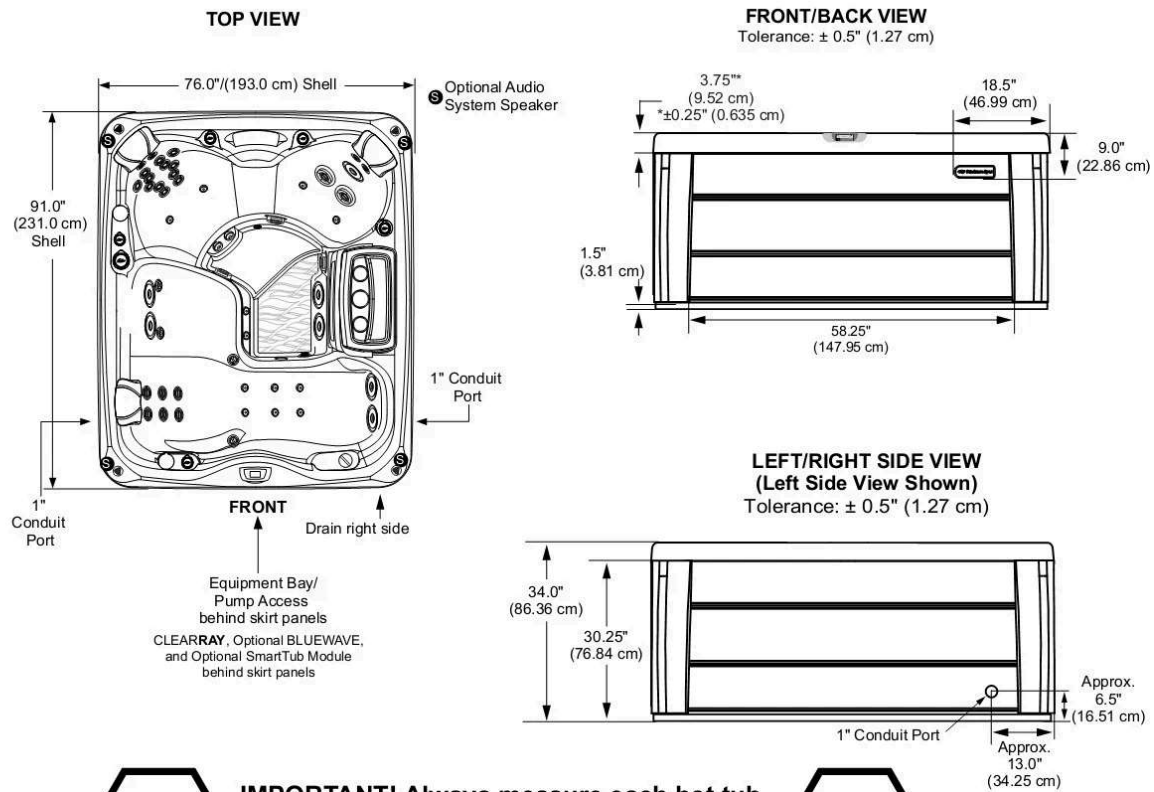

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

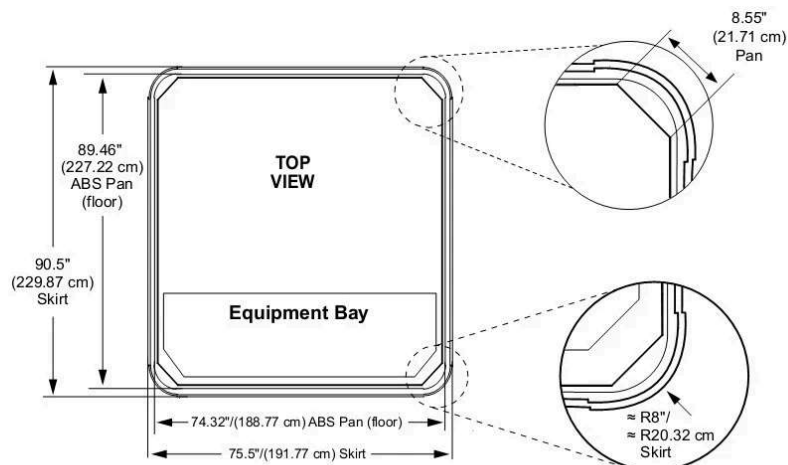


Dimensions/specifications subject to change without notice. Tolerance: ± 0.5 \" (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 880 Cambria™

Specifications

Dimensions:	76" x 91" x 34" (193.04 cm x 231 cm x 86.36 cm)
Seating Capacity:	6 Adults
Dry Weight:	772 lbs (364 kg)
Filled Weight (Spa Volume):	4,108 lbs (1,863 kg)
Filled Weight (Average Fill):	3,566 lbs (1,617 kg)
Water Capacity (Spa Volume):	400 US Gal (1,514 Liters)
Water Capacity (Average Fill):	335 US Gal (1,268 Liters)
Controls:	880 iTouch Interface LCD Control, Displays Temperature, Time, Cycles and Jet/Air System Control. Offers Customizing of Filtration Cycles, Lighting, Water Temperature Setting and other features
Water Delivery:	2 TheraMax High-Flow Pumps and 8-Hour Dynamic Flow Circulation System
Pump 1:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7.0A Max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7.0A Max.
Pump 3:	High Output Dynamic Flow, 8-Hour Filter/Circulation Pump (35 gpm) Programmable for Daily Start Time and Duration
Total Hydrojets:	46
Seat A Jets:	2 Fluidix Nex, 4 Fluidix ST, 2 Pulsator, 2 Vortex, 2 Focus-Relief®
Seat B Jets:	2 Vortex, 2 Focus Relief
Seat C Jets:	2 Fluidix Nex, 12 Fluidix ST, 2 Pulsator, 2 Accu-Pressure
Seat D Jets:	2 Fluidix Nex, 1 Vortex, 2 Fluidix Intelli-Jet
Seat E Jets:	1 Vortex, 2 Focus Relief
Seat F Jets:	2 Vortex, 2 Focus Relief
Air Blower:	High-Efficiency, 1-Speed
Aromatherapy Delivery:	6 Air Injector Jets with Quiet High Speed Air Pump
Air Controls/Massage Selectors:	4/1 (Standard air control with LED lights and massage selector with LED lights)
Filter:	MicroClean® Ultra Filtration System, 130 ft² (2 interlocking cartridge filters)
Water Treatment:	Automatic Brominator and Dynamic Flow Circulation System; Factory installed CLEARRAY® Water Purification System and CLEARRAY® PRO ₃ TECT™
Lighting:	Multi-Colored LED Lighting System (1 Waterfall, 1 Main Light, 4 Air controls, 1 Massage Selector, Exterior lights)
Skirt Cabinet (SunSide™):	Modern Hardwood, Brushed Gray and Vintage Oak (Equipped with Standard Exterior Lights)
Shell Colors:	North America: Platinum, Celestite (Gypsum), Sahara, Monaco, Midnight, Porcelain Export (50 Hz): All North America Colors
Handrails:	One Integral
Headrests:	Three, 1-Piece Gray
Heater:	North America (60 Hz): Low Flow 5.5 kW with Titanium Element Export (50 Hz): Low Flow 2.7 kW with Titanium Element
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A or 60A; Export (50 Hz): 230-240 VAC@1x40A or 1x16A/1x32A, 1x20A/1x16A, 3x16A (see manual for more configurations); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.
Limited Warranty*:	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 1 Year Stereo Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 2 Years Stereo
Waterfall Feature:	Adjustable Flow Rate; Colored Lighting
Audio System (Optional):	Factory Installed BLUEWAVE® 2.0 Wireless Spa Stereo System with Auxiliary 3.5 mm headphone jack connection, Bluetooth® compatible, 4 premium speakers and a powered subwoofer
Special Features:	MicroClean® Plus Versatile Filter Lid, Optional Filter Lid Pillow seat, Optional (Factory Installed) SmartTub™ Module




*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 880 Cambria

Operation/Seat Depths

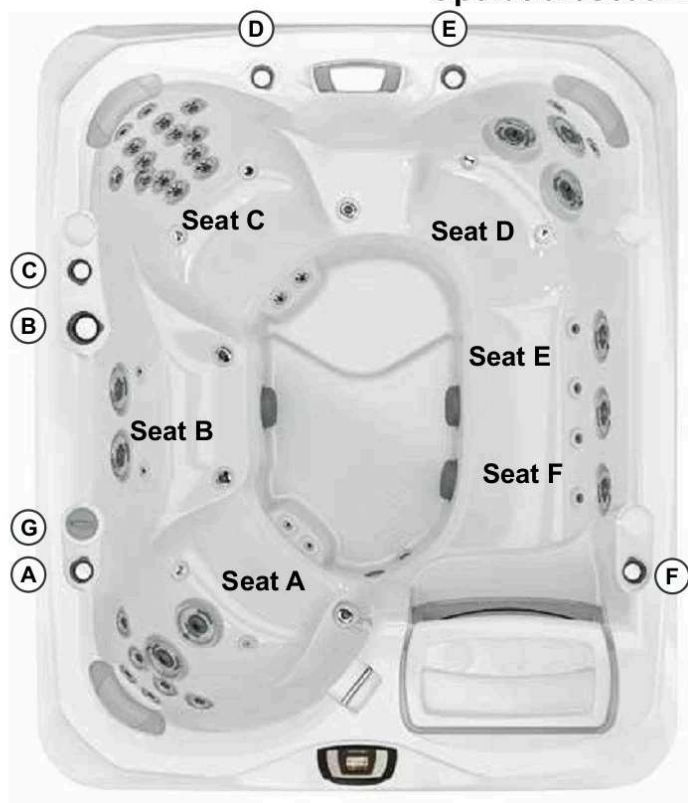

- (A) Air Control - Activates Seat A Jets (2 Fluidix Nex, 4 Fluidix ST, 2 Pulsator, 2 Vortex)
- (B) Massage Selector [Pump 1] - Adjusts Massage Level Between Seat A Jets and Seat C Jets
- (C) Air Control - Activates Seat C Upper 8 Jets (2 Fluidix Nex, 6 Fluidix ST)
- (D) Air Control - Activates Seat C Lower 10 Jets (6 Fluidix ST, 2 Pulsator, 2 Accu-Pressure)
- (E) Waterfall Selector [8-Hour Circ. Pump] - Controls Waterfall Output
- (F) Air Control - Activates Seat D Jets (2 Fluidix Nex, 1 Vortex, 2 Fluidix Intelli-Jet) + Seat E Jets (2 Vortex) + Seat F Jets (2 Vortex)
- (G) Suncsent Dispenser

• Jets Pump 2: Seat B Jets + Seat D Jets + Seat E Jets + Seat F Jets are always on when this pump is running

• Focus-Relief Jets: Work with both the blower and Jets Pump 2. The blower introduces air to the jet and the Jets Pump forces water through.

Filter Lid is shown with aftermarket seat pillow

46 Total Jets



Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 26.50" (67.31 cm)
 B = 22.50" (57.15 cm)
 C = 27.50" (69.85 cm)
 D = 22.00" (55.88 cm)
 E = 25.50" (64.77 cm)
 F = 22.50" (57.15 cm)

G = 22.75" (57.78 cm)
 H = 29.25" (74.29 cm)
 I = 31.00" (78.74 cm)



Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance $\pm 0.5"$ (1.27 cm).



Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 880 Cambria

Portable Dimensions

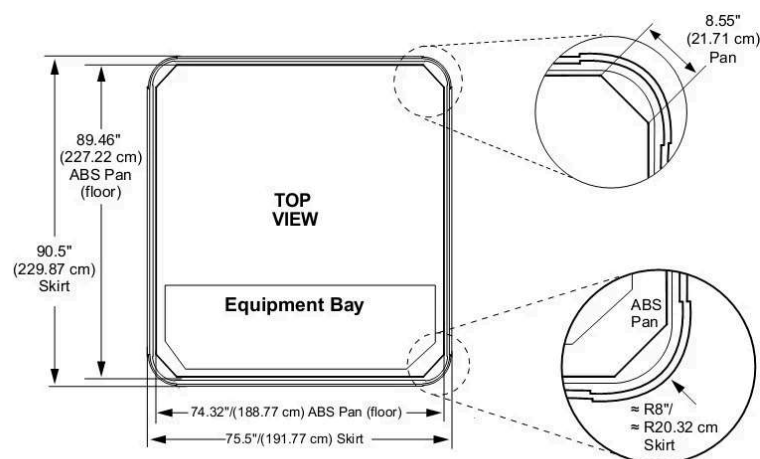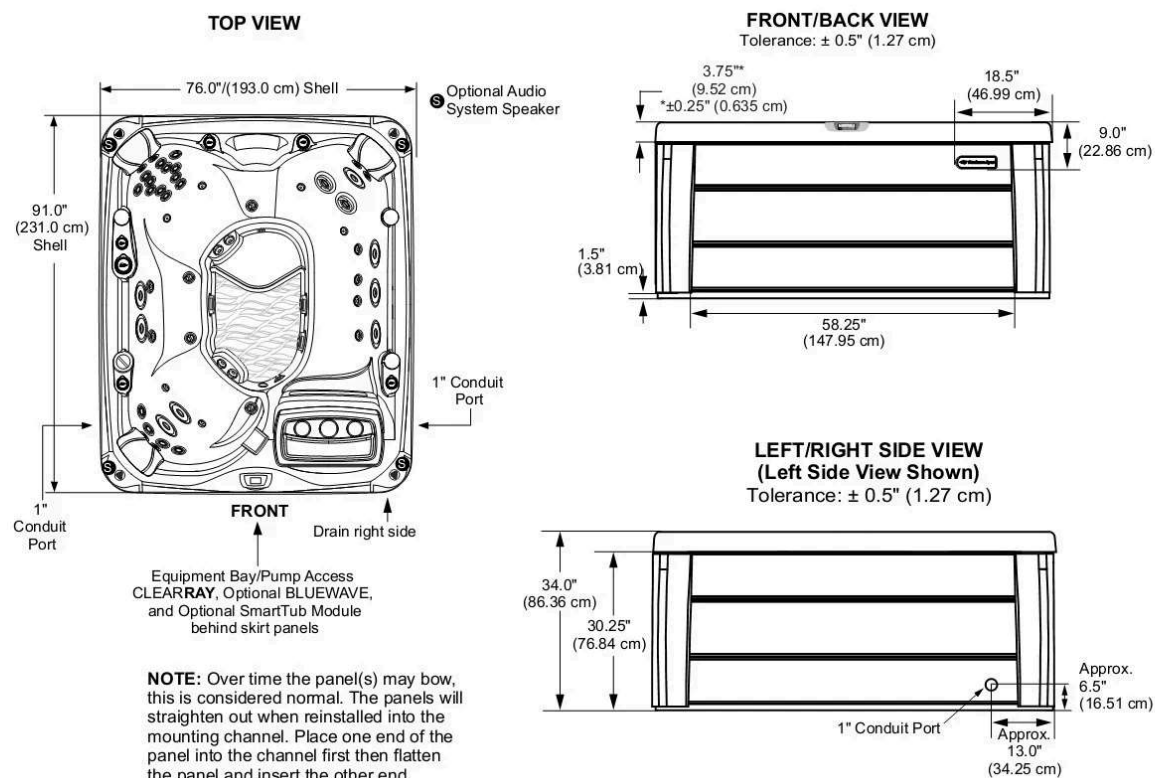

Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 880 Capri®

Specifications

Dimensions:	69" x 82" x 30.5" (175.5 cm x 208.5 cm x 77.5 cm)
Seating Capacity:	2-3 Adults
Dry Weight:	635 lbs (288 kg)
Filled Weight (Spa Volume):	3,262 lbs (1,480 kg)
Filled Weight (Average Fill):	2,553 lbs (1,158 kg)
Water Capacity (Total Volume):	315 US Gal (1,192 Liters)
Water Capacity (Average Fill):	230 US Gal (871 Liters)
Controls:	880 Touch Interface LCD Control, Displays Temperature, Time, Cycles and Jet/Air System Control. Offers Customizing of Filtration Cycles, Lighting, Water Temperature Setting and other features
Water Delivery:	1 TheraMax High-Flow Pump and 8-Hour Dynamic Flow Circulation System
Pump 1:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7.0A Max.
Pump 2:	High Output Dynamic Flow, 8-Hour Filter/Circulation Pump (35 gpm), Programmable for Daily Start Time and Duration
Total Hydrojets:	31
Seat A Jets:	6 Fluidix Reflex, 2 Pulsator, 4 Focus-Relief, 4 Accu-Pressure
Seat B Jets:	10 Fluidix ST, 2 Fluidix Nex
Seat C Jets:	1 Vortex, 2 Fluidix Intelli-Jet
Air Blower:	High-Efficiency, 1-Speed
Aromatherapy Delivery:	8 Air Injector Jets with Quiet High Speed Air Pump
Air Controls/Massage Selectors:	2/1 (Standard air control with LED lights and massage selector with LED lights)
Filter:	MicroClean® Ultra Filtration System, 130 ft² (2 interlocking cartridge filters)
Water Treatment:	Automatic Brominator and Dynamic Flow Circulation System; Factory installed CLEARARRAY® Water Purification System and CLEARARRAY® PRO ₃ TECT™
Lighting:	Multi-Colored Sunglow LED Lighting System (1 Waterfall, 1 Main light, 2 Air controls, 1 Massage Selectors, Exterior lights)
Skirt Cabinet (SunSide™):	Modern Hardwood, Brushed Gray and Vintage Oak (Equipped with Standard Exterior Lights)
Shell Colors:	North America: Platinum, Celestite (Gypsum), Sahara, Monaco, Midnight, Porcelain Export: All North America Colors
Handrails:	1 Integral
ComforTone Headrests:	Three, 1-Piece Gray
Heater:	North America (60 Hz): Low Flow 5.5 kW with Titanium Element Export (50 Hz): Low Flow 2.7 kW with Titanium Element
Electrical Requirements:	North America (60 Hz): 240 VAC@40A or 50A; Export (50 Hz): 230-240 VAC@1x25A, 2x16A (see manual for more configurations); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require Dual Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.
Limited Warranty*:	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 1 Year Stereo Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 2 Years Stereo
Waterfall Feature:	Adjustable Flow Rate; Colored Lighting
Audio System (Optional):	Factory Installed BLUEWAVE® 2.0 Wireless Spa Stereo System with Auxiliary 3.5 mm headphone jack connection, Bluetooth® compatible, 4 premium speakers and a powered subwoofer
Special Features:	MicroClean® Plus Versatile Filter Lid, Optional Filter Lid Pillow seat, Optional (Factory Installed) SmartTub™ Module



*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 880 Capri

Operation/Seat Depths



- A

Air Control - Activates Seat A Jets (6 Fluidix Reflex, 2 Pulsator, 4 Focus Relief, 4 Accu-Pressure)
- B

Massage Selector - Adjusts Massage Level Between Seat A Jets and Seat C Jets + Seat B Jets
- C

Air Control - Activates Seat B Jets (2 Fluidix Nex, 10 Fluidix-ST) and Seat C Jets (1 Vortex, 2 Fluidix Intelli-Jet)
- D

Waterfall Selector [8-Hour Circ. Pump] - Controls Waterfall Output
- E

Sunscent Dispenser

• Focus-Relief Jets: Work with both the blower and Jets Pump 2. The blower introduces air to the jet and the Jets Pump forces water through.

31 Total Jets



Spa Operation Subject To Change Without Notice

SEAT DEPTHS

- A = 24.25" (61.60 cm)
- B = 26.38" (66.99 cm)
- C = 25.75" (65.41 cm)
- D = 26.88" (68.26 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5"** (1.27 cm).




Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 880 Capri

Portable Dimensions

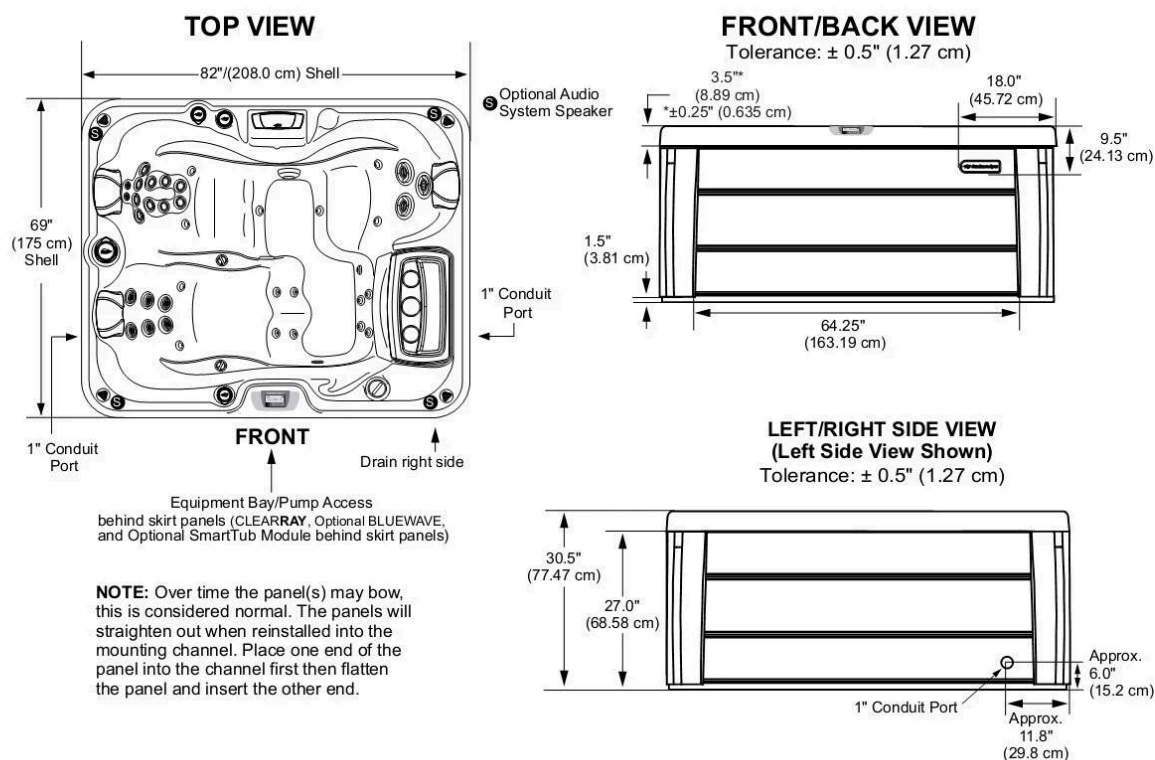

STOP **IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.** **STOP**

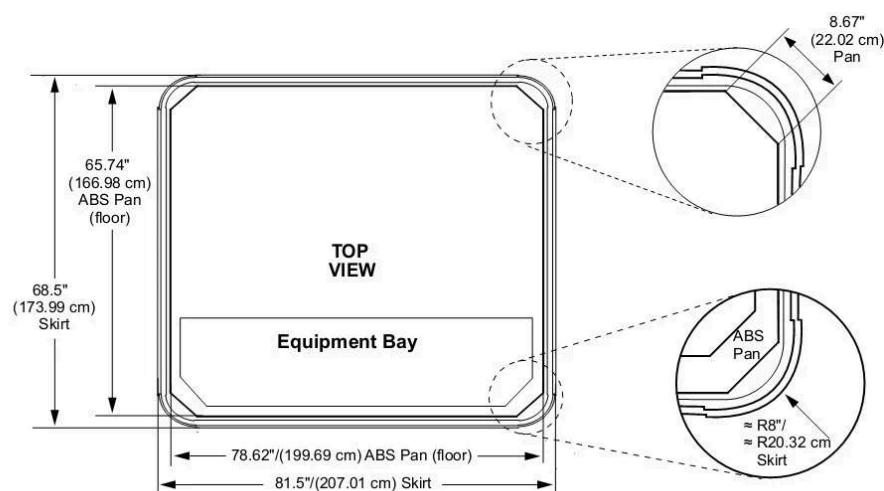


Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice

SunSide Dimensions

Spa Models	DIMENSIONS A-F (All measurements are an approximate)					
	A	B	C* *±0.25" (0.635 cm)	D	E	F
Maxxus	41.5" (105.41 cm)	18.5" (46.99 cm)	5.5" (13.97 cm)	12.0" (30.48 cm)	32.5" (82.55 cm)	73.5" (186.69 cm)
Aspen						
Optima	37.5" (95.25 cm)		3.75" (9.53 cm)	8.0" (20.32 cm)	32.25" (81.92 cm)	71.5" (181.61 cm)
Cameo						63.25" (160.65 cm)
Altamar	34" (86.36 cm)			7.5" (19.05 cm)	28.75" (73.03 cm)	58.25" (147.95 cm)
Cambria						
Marin						
Capri	30.5" (77.47 cm)	18" (45.72 cm)	3.5" (8.89 cm)	9.5" (24.13 cm)	25.5" (64.77 cm)	64.25" (163.19 cm)
DIMENSIONS G-I (All measurements are an approximate)						
	G	H	I	 IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundation support and/or decking.		
Maxxus	8.0" (20.32 cm)	13.0" (33.02 cm)	3.5" (8.89 cm)			
Aspen						
Optima	7.0" (17.78 cm)	13.5" (34.29 cm)	1.5" (3.81 cm)			
Cameo						
Altamar	6.5" (16.51 cm)	13.0" (33.02 cm)				
Cambria						
Marin						
Capri	4.0" (10.16 cm)	14.5" (36.86 cm)				
- Dimensions Subject to Change Without Notice - Tolerance: ± 0.5" (1.27 cm)						

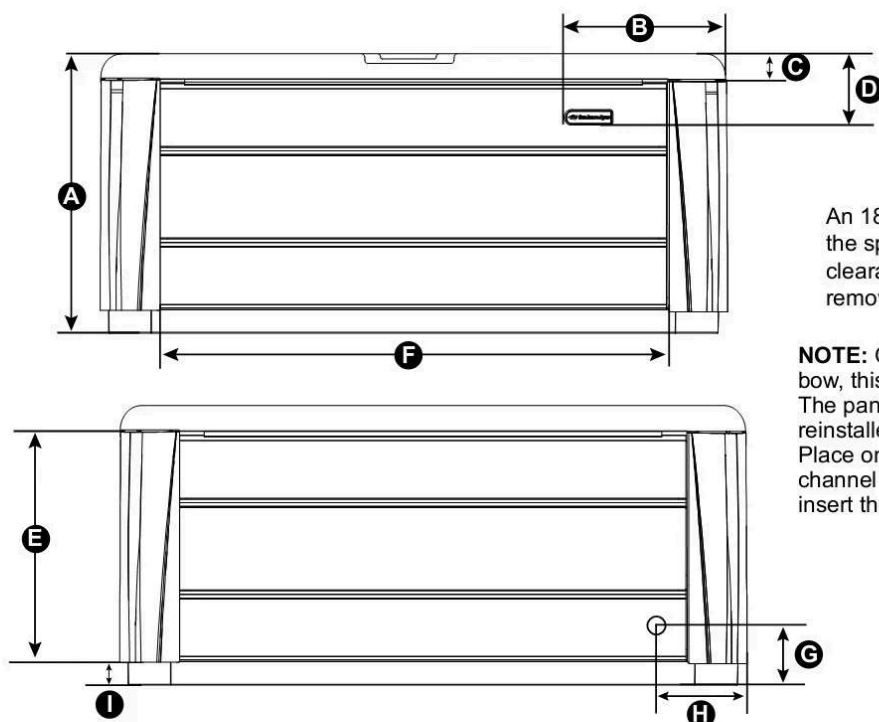

An 18" clearance, all around the spa, is recommended. This clearance is needed for panel removal or when servicing.


NOTE: Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

Tolerance: ± 0.5" (1.27 cm)

Sundance Spas 780 Hamilton™

Specifications

Dimensions:	89" x 89" x 36" (226 cm x 226 cm x 91.44 cm)
Seating Capacity:	5-6 Adults
Dry Weight:	826 lbs (375 kg)
Filled Weight (Spa Volume):	4,996 lbs (2,266 kg)
Filled Weight (Average Fill):	4,104 lbs (1,861 kg)
Water Capacity (Spa Volume):	500 US Gal. (1,893 Liters)
Water Capacity (Average Fill):	393 US Gal. (1,488 Liters)
Controls:	780 Series Solid-State Electronic Controls with LCD Readout Programmable Water Temperature, Filtration, and Heat Cycles
Water Delivery:	2 High Flow Pumps
Pump 1:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 12.0A Max. Export (50 Hz): 1-Speed/2.0 HP Continuous, 8.0A Max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.0A Max. Export (50 Hz): 1-Speed/2.0 HP Continuous, 7.0A Max
Pump 3:	8-Hour Filter/Circulation Pump; High Output Flow
Total Hydrojets:	41
Seat A Jets:	4 Vortex Mini, 2 Vortex
Seat B Jets:	2 SMT Fluidix
Seat C Jets:	2 SMT Micro, 2 Vortex Mini, 6 SMT Fluidix, 6 Adjustable Accu-Pressure
Seat D Jets:	2 Vortex
Seat E Jets:	9 Accu-Pressure, 4 SMT Micro
Footwell Jet (F):	2 Vortex Mini
Air Controls/Massage Selectors:	3/1 Standard air control with LED lights
Filter:	MicroClean® I Filtration System with Floating Weir, 125 ft² combined filtration (1 pleated and 1 spun-bound cartridge)
Water Treatment:	8-Hour Circulation Pump; Factory installed CLEARRAY® Water Purification System and CLEARRAY® PRO ₃ TECT™
Lighting:	Standard Multi-Colored SunRay LED Light; 6 LED Pin lights; Indicator light; Air controls
Synthetic Cabinet:	Available in Coastal, Mahogany, Autumn Walnut
Shell Colors:	North America: Platinum, Celestite (Gypsum), Sahara, Monaco, Midnight, Porcelain Export (50 Hz): All North America Colors
Handrails:	N/A
Headrests:	Three, 1-Piece Gray
Heater:	North America (60 Hz): 5.5 kW, High Flow Export (50 Hz): High Flow, 2.7 kW
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A, or 60A; Export (50 Hz): 230-240 VAC@1x20A, 1x16A/1x20A, or 3x16A (see manual for more configurations); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.
Limited Warranty*:	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo
Waterfall Feature:	On/Off Flow Rate; Colored Lighting
Audio System (Optional):	Factory Installed BLUEWAVE® Spa Stereo System with an Auxiliary 3.5 mm headphone jack connection and Bluetooth® compatible
Special Features (Optional):	Factory Installed SmartTub™ module



*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 780 Hamilton

Operation/Seat Depths



(A) Air Control - Activates Seat A Jets (2 Vortex, 4 Vortex Mini) + Seat B Jet (2 SMT Fluidix) + Seat D (2 Vortex) + Footwell Jets (2 Vortex Mini)

(B) Air Control - Activates Seat C Jets (2 SMT Mirco, 2 Vortex Mini, 6 SMT Fluidix, 6 Adjustable Accu-Pressure)



(C) Massage Selector [Pump 1]- Adjusts Massage Level Between Seat C Jets and Seat E Jets

(D) Air Control - Activates Seat E Jets (2 SMT Micro, 9 Accu-Pressure)

(E) Waterfall Selector [8-Hour Circ. Pump] - Controls Waterfall Output

• Jets Pump 2: Seat A Jets + Seat B Jets + Seat D Jets + Footwell Jets are always on when this pump is running

41 Total Jets (Stainless Steel Escutcheons Standard)



Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 27.25" (69.22 cm)

B = 20.50" (52.07 cm)

C = 25.50" (64.77 cm)


D = 22.75" (57.79 cm)

E = 27.25" (69.22 cm)

F = 18.25" (46.36 cm)

G = 32.50" (82.55 cm)



Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5" (1.27 cm).**

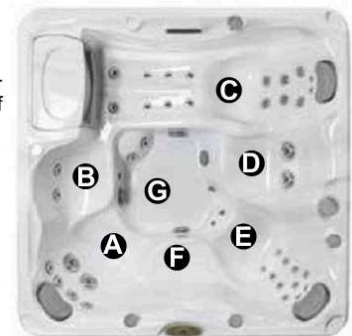

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 780 Hamilton

Portable Dimensions

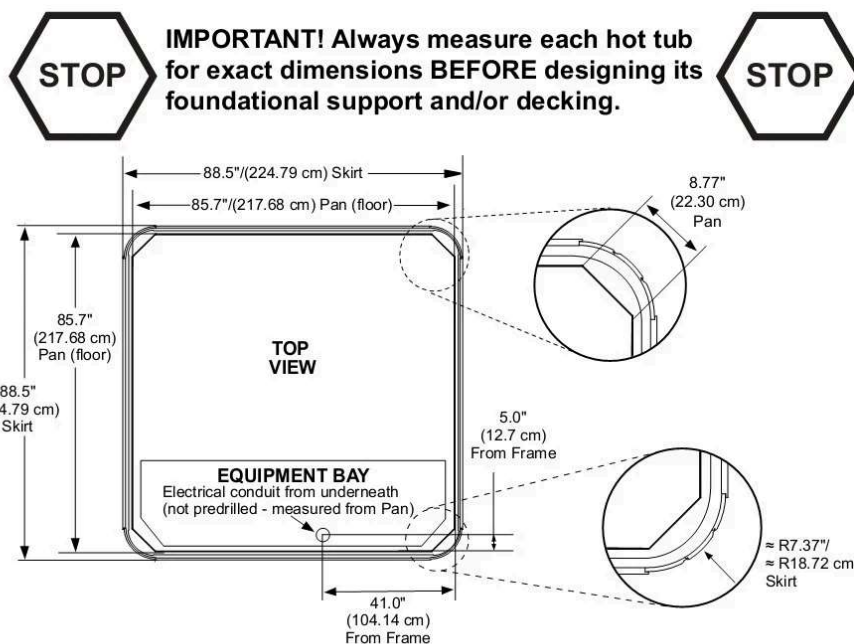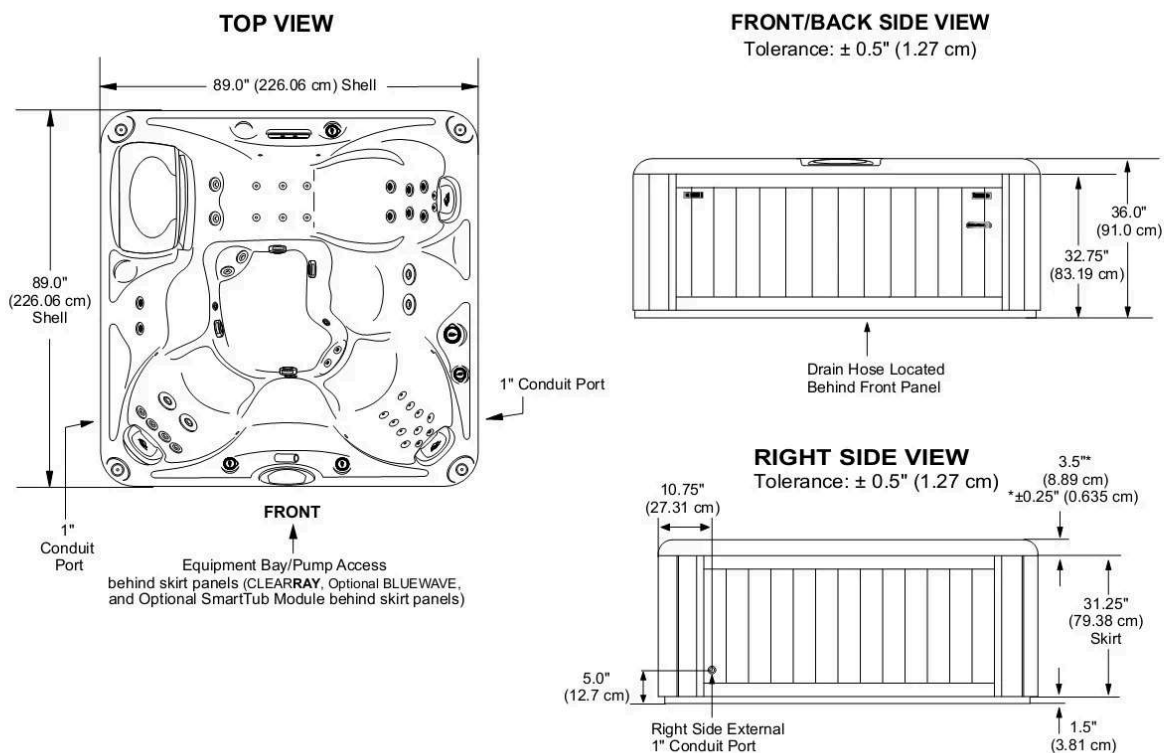

Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 780 Chelsea®

Specifications

Dimensions:	89" x 89" x 36" (226 cm x 226 cm x 91.44 cm)
Seating Capacity:	6-7 Adults
Dry Weight:	873 lbs (396 kg)
Filled Weight (Spa Volume):	5,210 lbs (2,363 kg)
Filled Weight (Average Fill):	4,209 lbs (1,909 kg)
Water Capacity (Spa Volume):	520 US Gal (1,968 Liters)
Water Capacity (Average Fill):	400 US Gal (1,514 Liters)
Controls:	780 Series Solid-State Electronic Controls with LCD Readout, Programmable Water Temperature, Filtration, and Heat Cycles
Water Delivery:	2 High Flow Pumps
Pump 1:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 12.0A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 8.0A Max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.0A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7.0A Max.
Pump 3:	8-Hour Filter/Circulation Pump; High Output Flow
Total Hydrojets:	40
Seat A Jets:	2 Vortex
Seat B Jets:	2 SMT Fluidix
Seat C Jets:	4 SMT Micro, 9 Accu-Pressure
Seat D Jets:	1 Vortex
Seat E Jets:	2 SMT Micro, 6 SMT Fluidix
Seat F Jets:	4 Mini-Vortex, 2 Vortex
Footwell Jets (G):	8 Adjustable Accu-Pressure
Air Controls/Massage Selectors:	4/1 Standard air control with LED lights
Filter:	MicroClean® I Filtration System with Floating Weir, 125 ft² combined filtration (1 pleated and 1 spun-bound cartridge)
Water Treatment:	8-Hour Circulation Pump; Factory installed CLEARRAY® Water Purification System and CLEARRAY® PRO ₃ TECT™
Lighting:	Standard Multi-Colored SunRay LED Light; 7 LED Pin Lights; Indicator light; Air controls
Synthetic Cabinet:	Available in Coastal, Mahogany, Autumn Walnut
Shell Colors:	North America: Platinum, Celestite (Gypsum), Sahara, Monaco, Midnight, Porcelain Export (50 Hz): All North America Colors
Handrails:	N/A
Headrests:	Four, 1-Piece Gray
Heater:	North America (60 Hz): 5.5 kW, High Flow Export (50 Hz): High Flow, 2.7 kW
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A, or 60A; Export (50 Hz): 230-240 VAC@1x20A, 1x16A/1x20A, or 3x16A (see manual for more configurations); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require Dual Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.
Limited Warranty*:	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo
Waterfall Feature:	On/Off Flow Rate; Colored Lighting
Audio System (Optional):	Factory Installed BLUEWAVE® Spa Stereo System with an Auxiliary 3.5 mm headphone jack connection and Bluetooth® compatible
Special Features (Optional):	Factory Installed SmartTub™ module



*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 780 Chelsee

Operation/Seat Depths



- (A)** Air Control - Activates Seat A Jets (2 Vortex) + Seat B Jets (2 SMT Fluidix) + Footwell Jets (2 Adjustable Accu-Pressure)
- (B)** Massage Selector [Pump 1]- Adjusts Massage Level Between Seat C Jets + Footwell Jets (2 Adjustable Accu-Pressure) and Seat F Jets + Footwell Jets (2 Adjustable Accu-Pressure)
- (C)** Air Control - Activates Seat C Jets (4 SMT Micro, 9 Accu-Pressure) + Footwell Jets (2 Adjustable Accu-Pressure)
- (D)** Air Control - Activates Seat D Jet (1 Vortex) + Seat E (2 SMT Micro, 6 SMT Fluidix) + Footwell Jets (2 Adjustable Accu-Pressure)
- (E)** Air Control - Activates Seat F Jets (2 Vortex, 2 Mini-Vortex) + Footwell Jets (2 Adjustable Accu-Pressure)
- (F)** Waterfall Selector [8-Hour Circ. Pump] - Controls Waterfall Output

• Jets Pump 2: Seat A Jets + Seat B Jets + Seat D + Seat E Jets + 4 Footwell Jets are always on when this pump is running

40 Total Jets (Stainless Steel Escutcheons Standard)




Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 25.38" (64.47 cm)
B = 21.75" (55.25 cm)
C = 27.50" (69.85 cm)
D = 21.50" (54.61 cm)
E = 25.50" (64.77 cm)
F = 24.00" (60.96 cm)
G = 18.25" (46.36 cm)
H = 29.88" (75.88 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance $\pm 0.5"$ (1.27 cm).**




Dimensions/Specifications Subject To Change Without Notice

Sundance Spas Chelsee

Portable Dimensions

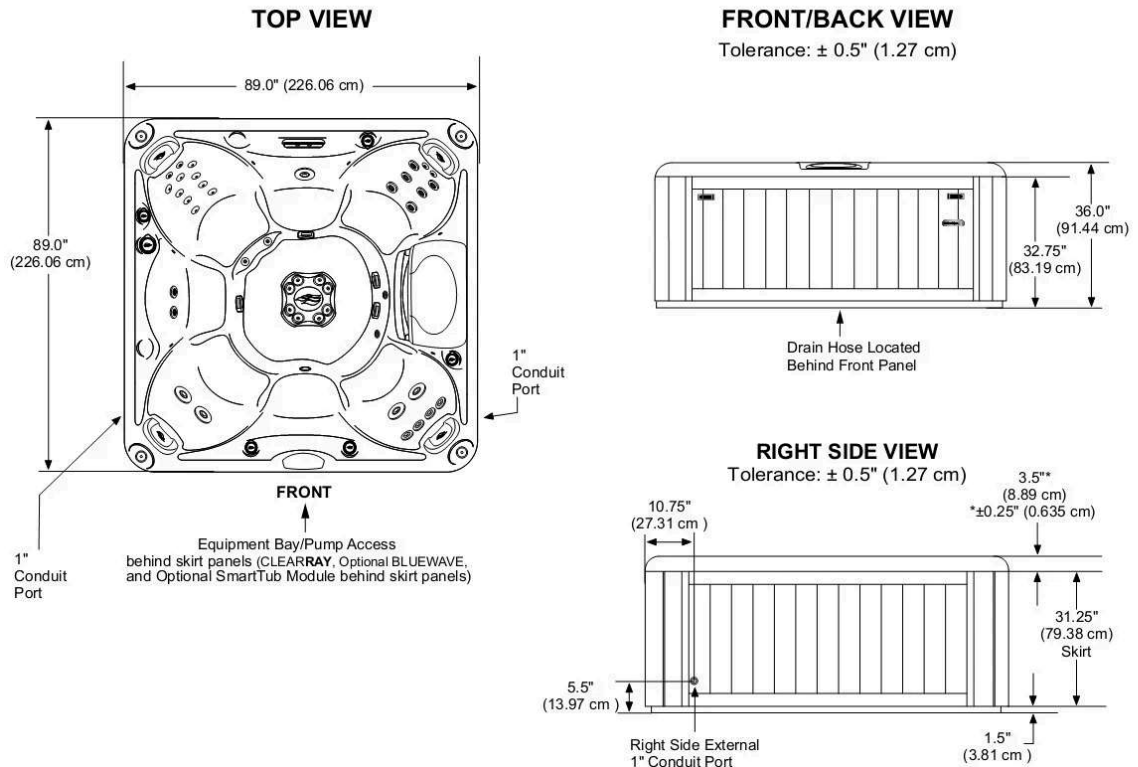

STOP **IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.** **STOP**

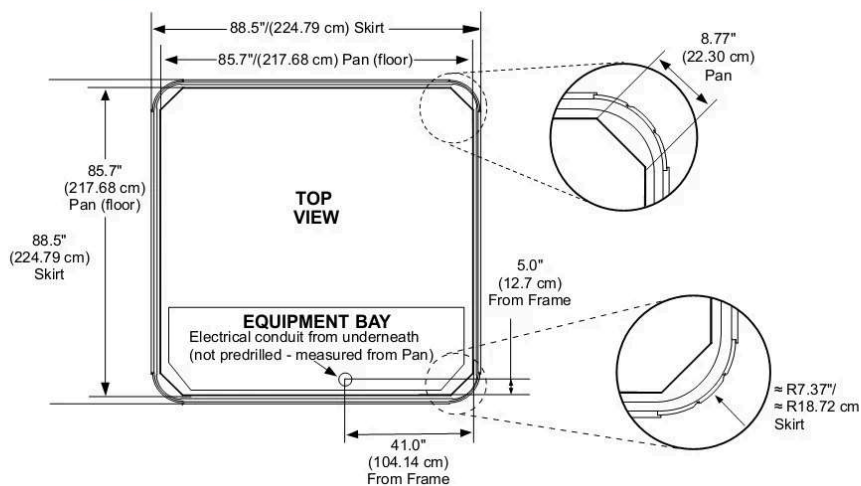

Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 780 Hanover™

Specifications

Dimensions:	84" x 84" x 36" (213 cm x 213 cm x 91.44 cm)
Seating Capacity:	6 Adults
Dry Weight:	740 lbs (336 kg)
Filled Weight (Spa Volume):	4,368 lbs (1,981 kg)
Filled Weight (Average Fill):	3,701 lbs (1,679 kg)
Water Capacity (Spa Volume):	435 US Gal (1,647 Liters)
Water Capacity (Average Fill):	355 US Gal (1,344 Liters)
Controls:	780 Series Solid-State Electronic Controls with LCD Readout, Programmable Water Temperature, Filtration, and Heat Cycles
Water Delivery:	2 High Flow Pump
Pump 1:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 12.0A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 8.0A Max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7.0A Max.
Pump 3:	8-Hour Filter/Circulation Pump; High Output Flow
Total Hydrojets:	34
Seat A Jets:	1 Vortex
Seat B Jets:	2 SMT Micro, 6 SMT Fluidix
Seat C Jets:	1 Mini Vortex
Seat D Jets:	2 SMT Micro, 9 Accu-Pressure
Seat E Jets:	2 Mini Vortex
Seat F Jets:	4 Mini Vortex, 2 Vortex
Footwell Jets (G):	1 Mini Vortex, 4 Adjustable Accu-Pressure
Air Controls/Massage Selectors:	3/2 Standard air control with LED lights
Filter:	MicroClean® I Filtration System with Floating Weir, 125 ft² combined filtration, (1 pleated and 1 spun-bound cartridge)
Water Treatment:	8-Hour Circulation Pump; Factory installed CLEARRAY® Water Purification System and CLEARRAY® PRO ₃ TECT™
Lighting:	Standard Multi-Colored SunRay LED Light; 6 LED Pin Lights; Indicator light; Air controls
Synthetic Cabinet:	Available in Coastal, Mahogany, Autumn Walnut
Shell Colors:	North America: Platinum, Celestite (Gypsum), Sahara, Monaco, Midnight, Porcelain Export (50 Hz): All North America Colors
Handrails:	N/A
Headrests:	Three, 1-Piece Gray
Heater:	North America (60 Hz): 5.5 kW, High Flow Export (50 Hz): High Flow, 2.7 kW
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A, or 60A; Export (50 Hz): 230-240 VAC@1x20A, 1x16A/1x20A, or 3x16A (see manual for more configurations); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require Dual Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.
Limited Warranty*:	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo
Waterfall Feature:	On/Off Flow Rate on when circulation pump is running; Colored Lighting
Audio System (Optional):	Factory Installed BLUEWAVE® Spa Stereo System with an Auxiliary 3.5 mm headphone jack connection and Bluetooth® compatible
Special Features (Optional):	Factory Installed SmartTub™ module




*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 780 Hanover

Operation/Seat Depths

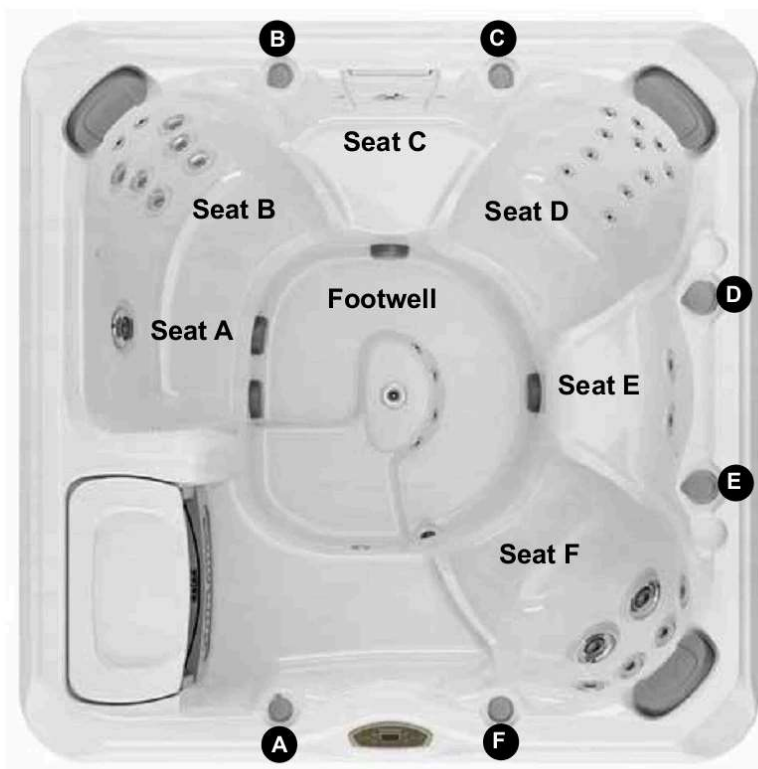

- (A)** Air Control - Activates Seat F Jets (4 Mini Vortex, 2 Vortex) + Footwell Jets (2 Adjustable Accu-Pressure)
- (B)** Air Control - Seat B Jets (2 SMT Micro, 6 SMT Fluidix)
- (C)** Air Control - Activates Seat A (1 Vortex) + Seat C (1 Mini Vortex) + Seat D (2 SMT Micro, 9 Accu-Pressure) + Seat E Jets (2 Mini Vortex)
- (D)** Massage Selector [Pump 1]- Adjusts Massage Level Between Seat B Jets and Seat E Jets + Footwell (2 Adjustable Accu-Pressure)
- (E)** Massage Selector [Pump 2]- Adjusts Massage Level Between Seat D Jets and Seat A + Seat C, Seat E + Footwell (1 Mini Vortex) Jets
- (F)** Waterfall Selector [8-Hour Circ. Pump] - Controls Waterfall Output

• Jets Pump 2: Footwell Jets (2 Adjustable Accu-Pressure) are always on when this pump is running

34 Total Jets (Stainless Steel Escutcheons Standard)



Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 19.00" (48.26 cm)
B = 27.25" (69.22 cm)
C = 18.13" (46.04 cm)
D = 28.75" (73.03 cm)

E = 17.75" (45.09 cm)
F = 27.00" (68.58 cm)
G = 32.70" (83.06 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5" (1.27 cm).**




Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 780 Hanover

Portable Dimensions

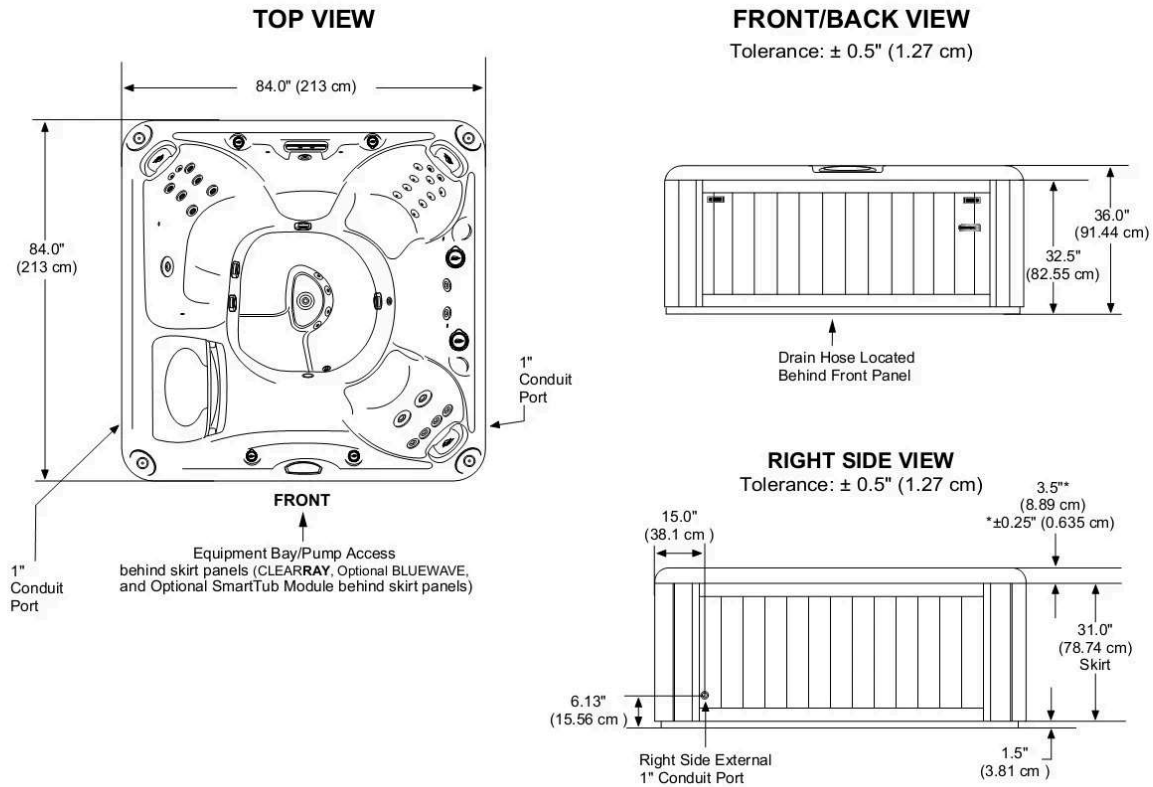

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

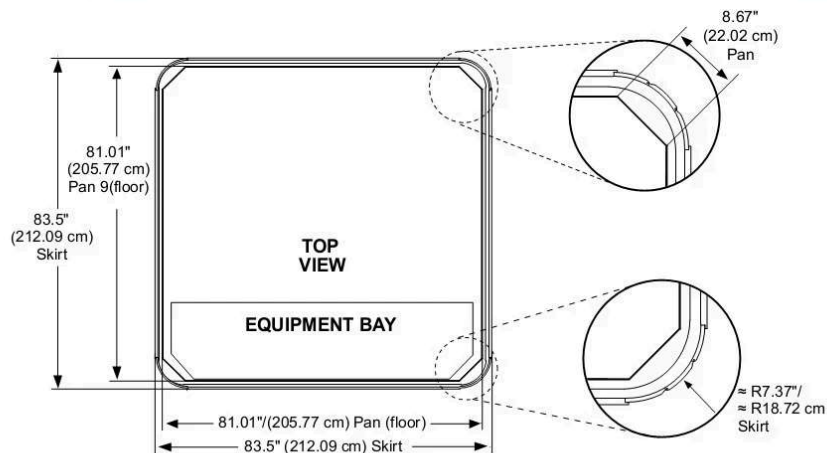


Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 780 Bristol™

Specifications

Dimensions:	84" x 84" x 36" (213 cm x 213 cm x 91.44 cm)
Seating Capacity:	5 Adults
Dry Weight:	745 lbs (338 kg)
Filled Weight (Spa Volume):	4,331 lbs (1,965 kg)
Filled Weight (Average Fill):	3,664 lbs (1,662 kg)
Water Capacity (Spa Volume):	430 US Gal (1,628 Liters)
Water Capacity (Average Fill):	350 US Gal (1,325 Liters)
Controls:	780 Series Solid-State Electronic Controls with LCD Readout, Programmable Water Temperature, Filtration, and Heat Cycles
Water Delivery:	2 High Flow Pump
Pump 1:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 12.0A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 8.0A Max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7.0A Max.
Pump 3:	8-Hour Filter/Circulation Pump; High Output Flow
Total Hydrojets:	38
Seat A Jets :	4 Mini Vortex, 2 Vortex
Seat B Jets:	2 Mini Vortex
Seat C Jets:	2 SMT Micro, 6 SMT Fluidix, 6 Adjustable Accu-Pressure, 2 Mini Vortex
Seat D Jets:	1 Vortex
Seat E Jets:	2 SMT Micro, 9 Accu-Pressure
Footwell Jets (F):	2 Mini Vortex
Air Controls/Massage Selectors:	3/2 Standard air control with LED lights
Filter:	MicroClean® I Filtration System with Floating Weir, 125 ft² combined filtration, (1 pleated and 1 spun-bound cartridge)
Water Treatment:	8-Hour Circulation Pump; Factory installed CLEARRAY® Water Purification System and CLEARRAY® PRO ₃ TECT™
Lighting:	Standard Multi-Colored SunRay LED Light; 6 LED Pin Lights; Indicator light; Air controls
Synthetic Cabinet:	Available in Coastal, Mahogany, Autumn Walnut
Shell Colors:	North America: Platinum, Celestite (Gypsum), Sahara, Monaco, Midnight, Porcelain Export (50 Hz): All North America Colors
Handrails:	N/A
Headrests:	Three, 1-Piece Gray
Heater:	North America (60 Hz): 5.5 kW, High Flow Export (50 Hz): High Flow, 2.7 kW
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A, or 60A; Export (50 Hz): 230-240 VAC@1x20A, 1x16A/1x20A, or 3x16A (see manual for more configurations); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require Dual Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.
Limited Warranty*:	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo
Waterfall Feature:	On/Off Flow Rate on when circulation pump is running; Colored Lighting
Audio System (Optional):	Factory Installed BLUEWAVE® Spa Stereo System with an Auxiliary 3.5 mm headphone jack connection and Bluetooth® compatible
Special Features (Optional):	Factory Installed SmartTub™ module



*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 780 Bristol

Operation/Seat Depths



- (A) Air Control - Activates Seat A Jets (2 Mini Vortex, 2 Vortex)
- (B) Massage Selector [Pump 2]- Adjusts Massage Level Between Seat B Jets + Seat D Jet + Footwell Jets and Seat E Jets
- (C) Massage Selector [Pump 1]- Adjusts Massage Level Between Seat C Jets and Seat A Jets
- (D) Air Control - Seat C Jets (2 SMT Micro, 6 SMT Fluidix, 6 Adjustable Accu-Pressure, 2 Mini Vortex)
- (E) Air Control - Activates Seat E Jets (2 SMT Micro, 9 Accu-Pressure) + Seat D Jets (2 Vortex) + Seat D Jets (2 Vortex) + Footwell Jets (2 Mini Vortex)
- (F) Waterfall Selector [8-Hour Circ. Pump] - Controls Waterfall Output

38 Total Jets (Stainless Steel Escutcheons Standard)



Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 27.00" (68.58 cm)
 B = 19.50" (49.53 cm)
 C = 25.25" (64.14 cm)
 D = 26.25" (66.68 cm)

E = 27.50" (69.85 cm)
 F = 18.25" (46.36 cm)
 G = 32.70" (83.06 cm)



Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance $\pm 0.5"$ (1.27 cm).**



Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 780 Bristol

Portable Dimensions

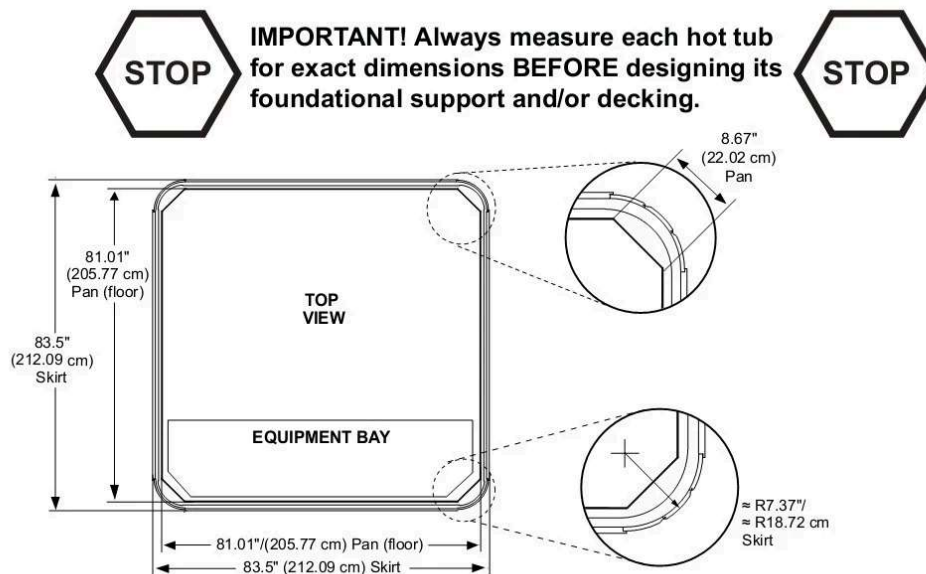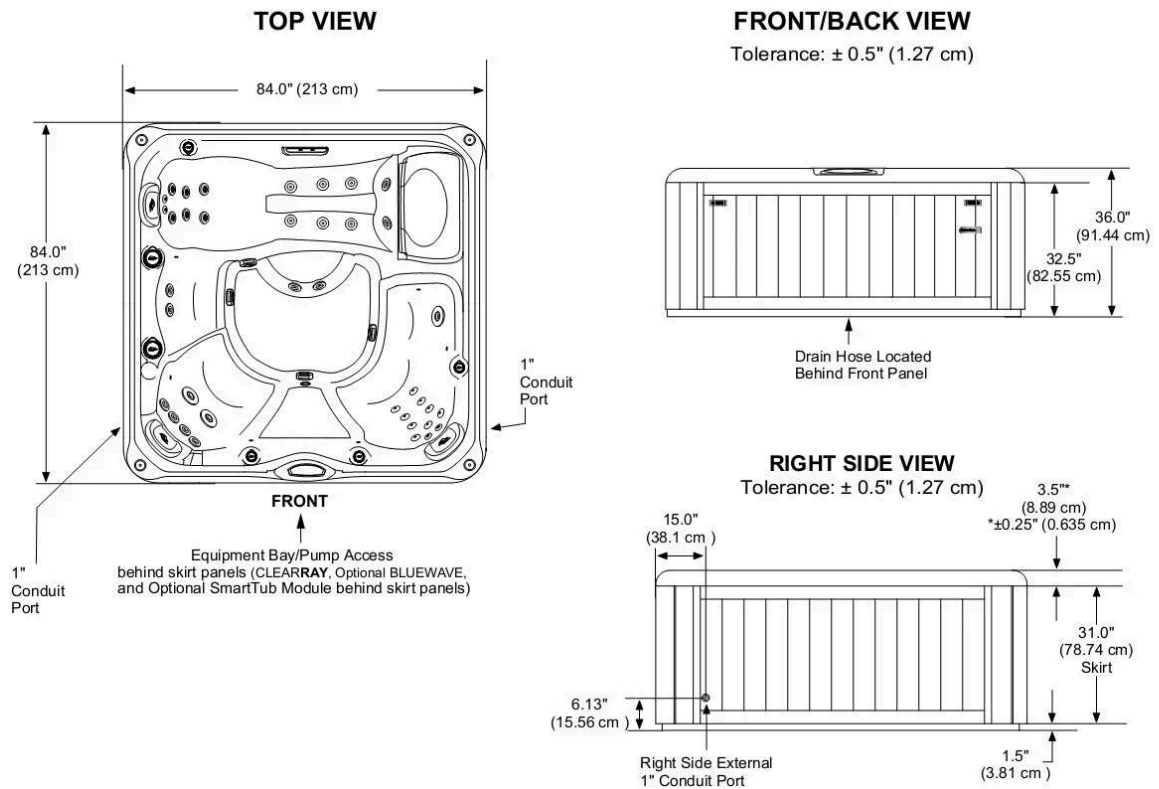


Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 780 Montclair™

Specifications

Dimensions:	75" x 91" x 33.5" (191 cm x 231 cm x 85.09 cm)
Seating Capacity:	4-5 Adults
Dry Weight:	790 lbs (358 kg)
Filled Weight (Spa Volume):	4,251 lbs (1,928 kg)
Filled Weight (Average Fill):	3,375 lbs (1,531 kg)
Water Capacity (Spa Volume):	415 US Gal (1,571 Liters)
Water Capacity (Average Fill):	310 US Gal (1,173 Liters)
Controls:	780 Series Solid-State Electronic Controls with LED Readout, Programmable Temperature, Filtration, and Heat Cycles
Water Delivery:	2 High Flow Pump
Pump 1:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 12A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP continuous, 8.0A Max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7.0A Max.
Pump 3:	8-Hour Filter/Circulation Pump; High Output Flow
Total Hydrojets:	30
Seat A Jets:	6 SMT Fluidix, 2 Adjustable Accu-Pressure, 2 Mini Vortex
Seat B Jets:	1 Vortex
Seat C Jets:	2 SMT Micro, 9 Accu-Pressure
Seat D Jets:	4 Mini Vortex, 2 Vortex
Footwell Jets (E):	2 Mini Vortex
Air Controls/Massage Selectors:	3/1 Standard air control with LED lights
Filter:	MicroClean® I Filtration System with Floating Weir, 125 ft² combined filtration, (1 pleated and 1 spun-bound cartridge)
Water Treatment:	8-Hour Circulation Pump; Factory installed CLEARARRAY® Water Purification System and CLEARARRAY® PRO3TECT™
Lighting:	Standard Multi-Colored SunRay LED Light; 6 LED Pin Lights; Indicator light; Air controls
Synthetic Cabinet:	Available in Coastal, Mahogany, Autumn Walnut
Shell Colors:	North America: Platinum, Celestite (Gypsum), Sahara, Monaco, Midnight, Porcelain Export (50 Hz): All North America Colors
Handrails:	N/A
Headrests:	Three, 1-Piece Gray
Heater:	North America Model (60 Hz): High Flow 5.5 kW@240 VAC; Export (50 Hz): High Flow, 2.7 kW
Electrical Requirements:	North America Model (60 Hz): 240 VAC@40A, 50A or 60A Export (50 Hz): 230-240 VAC@1x20A, 1x16A/1x20A, or 3x16A (see manual for more configurations); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require Dual Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.
Limited Warranty*:	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo
Waterfall Feature:	On/Off Flow Rate on when circulation pump is running; Colored Lighting
Audio System (Optional):	Factory Installed BLUEWAVE® Spa Stereo System with an Auxiliary 3.5 mm headphone jack connection and Bluetooth® compatible
Special Features (Optional):	Factory Installed SmartTub™ module



*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 780 Montclair

Operation/Seat Depths



- (A)** Air Control - Activates Seat A Jets (6 SMT Fluidix, 2 Adjustable Accu-Pressure, 2 Mini Vortex)
 - (B)** Massage Selector [Pump 1]- Adjusts Massage Level Between Seat A Jets and Seat C Jets
 - (C)** Air Control - Activates Seat C Jets (2 SMT Micro, 9 Accu-Pressure)
 - (D)** Air Control - Activates Seat B Jets (1 Vortex) + Seat D Jets (4 Mini Vortex, 2 Vortex) + Footwell Jets (2 Mini Vortex)
 - (E)** Waterfall Selector [8-Hour Circ. Pump] - Controls Waterfall Output
- Jets Pump 2: Seat B Jets + Seat D Jets + Footwell Jets are always on when the jets pump is running

30 Total Jets (Stainless Steel Escutcheons Standard)




Spa Operation Subject To Change Without Notice

SEAT DEPTHS

- A = 24.63" (62.55 cm)**
- B = 24.63" (62.55 cm)**
- C = 27.75" (70.49 cm)**
- D = 22.75" (57.79 cm)**
- E = 25.75" (65.41 cm)**
- F = 30.38" (77.15 cm)**



Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5" (1.27 cm).**

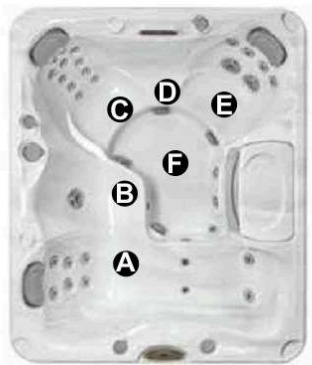

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 780 Montclair

Portable Dimensions

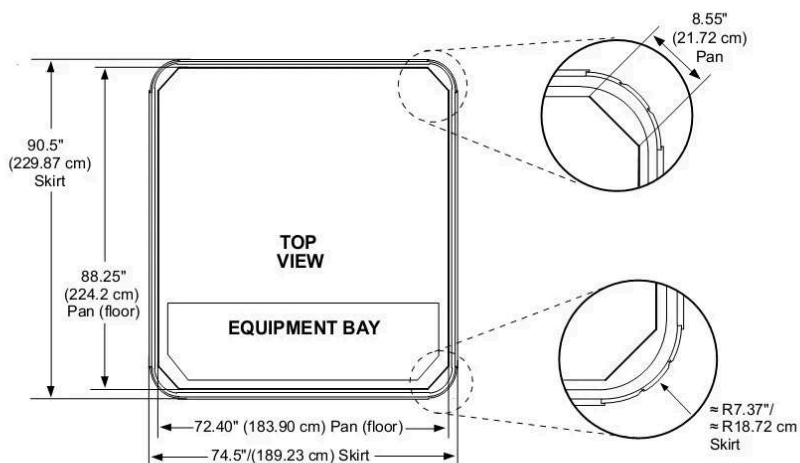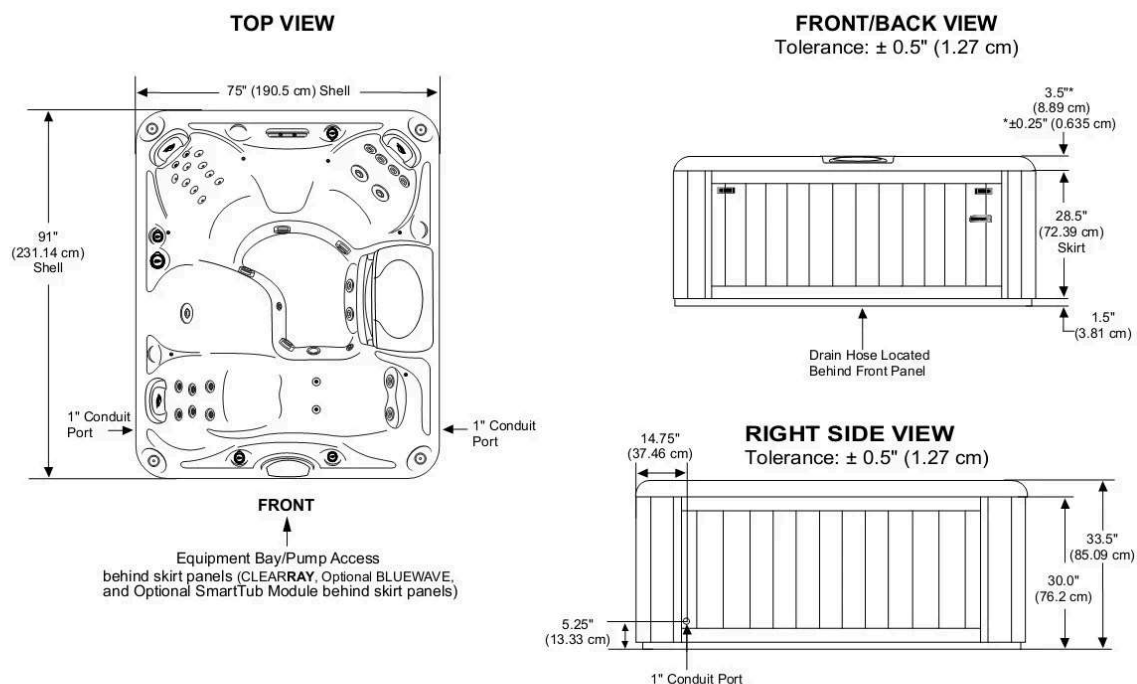


Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 780 Dover™

Specifications

Dimensions:	69" x 82" x 30.5" (175.3 cm x 208.3 cm x 77.5 cm)	
Seating Capacity:	2-3 Adults	
Dry Weight:	620 lbs (281 kg)	
Filled Weight (Spa Volume):	3,247 lbs (1,473 kg)	
Filled Weight (Average Fill):	2,538 lbs (1,151 kg)	
Water Capacity (Spa Volume):	315 US Gal (1,192 Liters)	
Water Capacity (Average Fill):	230 US Gal (871 Liters)	
Controls:	780 Series Solid-State Electronic Controls with LED Readout, Programmable Temperature, Filtration, Heat Cycles	
Water Delivery:	1 High-flow pump	
Pump 1:	North America (60 Hz): 2-Speed/1.5 HP Continuous, 13.0A Max., 48 Frame Export (50 Hz): 2-Speed/2.0 HP Continuous, 8.0A max.	
Pump 2:	24-Hour Filter/Circulation Pump	
Total Hydrojets:	23	
Seat A Jets:	2 SMT Micro, 6 SMT Fluidix, 2 Mini Vortex	
Seat B Jets:	2 Vortex	
Seat C Jets:	2 SMT Micro, 9 Accu-Pressure	
Air Controls/Massage Selectors:	3/1 Standard air control LED lights	
Filter:	MicroClean® Filter System, 125 ft² Combined Filtration, (1 pleated and 1 spun-bound cartridge)	
Water Treatment:	24-Hour Circulation Pump; Factory installed CLEARRAY® Water Purification System and CLEARRAY® PRO ₃ TECT™	
Lighting:	Standard Multicolored SunRay LED Light; 4 LED Pin Lights; Indicator light; Air controls	
Synthetic Cabinet:	Available in Coastal, Mahogany, Autumn Walnut	
Shell Colors:	North America: Platinum, Celestite (Gypsum), Sahara, Monaco, Midnight, Porcelain Export (50 Hz): All North America Colors	
Handrails:	N/A	
Headrests:	Three, 1-Piece Gray	
Heater:	North America Convertible Model (60 Hz): Low Flow, 1 kW@120 VAC or Convertible to 4 kW@240 VAC Export (50 Hz): Low flow, 2.7 kW	
Electrical Requirements:	North America Convertible Model (60 Hz): 120 VAC@15A with Supplied GFCI Cord or 240 VAC@30A or 40A (Hard Wired Only); Export (50 Hz): 230-240 VAC@1x16A or 2x16A (see manual for more configurations); or suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require Dual Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.	
Limited Warranty*:	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo	
Waterfall Feature:	On/Off Flow Rate on when pump 1 is running; Colored Lighting	
Audio System (Optional):	Factory Installed BLUEWAVE® Spa Stereo System with an Auxiliary 3.5 mm headphone jack connection and Bluetooth® compatible	
Special Features (Optional):	Factory Installed SmartTub™ module	

*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 780 Dover

Operation/Seat Depths



- (A) Air Control - Activates Seat A Jets (2 SMT Micro, 6 SMT Fluidix, 2 Mini Vortex)
- (B) Massage Selector [Pump 1]- Adjusts Massage Level Between Seat A Jets + Seat B Jets and Seat C Jets
- (C) Air Control - Activates Seat B Jets (2 Vortex)
- (D) Air Control - Activates Seat C Jets (2 SMT Micro, 9 Accu-Pressure)
- (E) Waterfall Selector [Pump 1] - Controls Waterfall Output

23 Total Jets (Stainless Steel Escutcheons Standard)




Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 24.50" (62.23 cm)
 B = 26.63" (67.63 cm)
 C = 25.75" (65.41 cm)
 D = 26.50" (67.31 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance $\pm 0.5"$ (1.27 cm).**

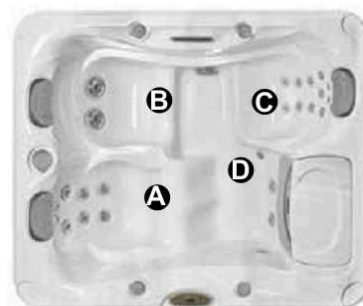


Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 780 Dover

Portable Dimensions

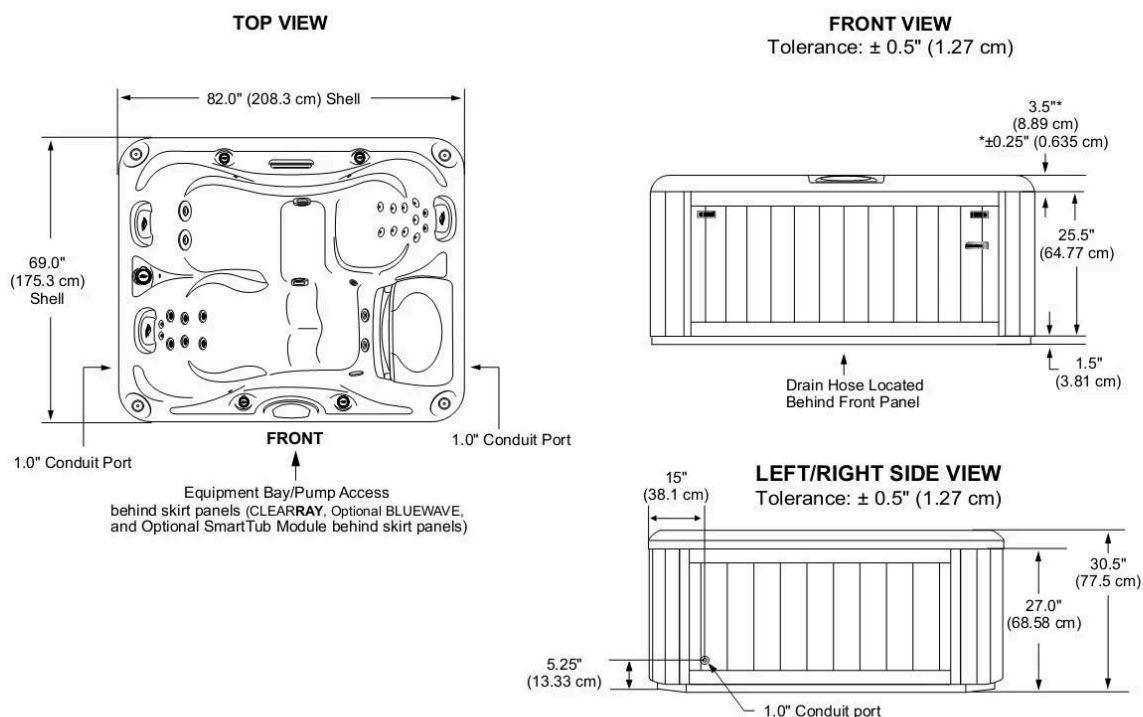

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

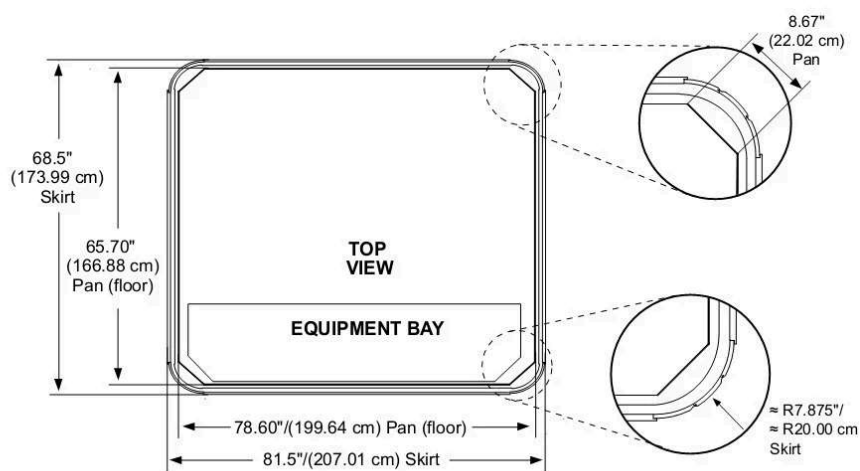


Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 McKinley™

Specifications

Dimensions:	89" x 89" x 36" (226 cm x 226 cm x 91.44 cm)
Seating Capacity:	6-7 Adults
Dry Weight:	778 lbs (353 kg)
Filled Weight (Spa Volume):	5,115 lbs (2,320 kg)
Filled Weight (Average Fill):	4,197 lbs (1,904 kg)
Water Capacity (Spa Volume):	520 US Gal (1,968 Liters)
Water Capacity (Average Fill):	410 US Gal (1,552 Liters)
Controls:	Solid-State Electronic Controls with LCD Readout, Programmable Water Temperature, Filtration, and Heat Cycles
Water Delivery:	2 High Flow Pumps
Pump 1:	North America (60 Hz): 2-Speed/2.5 HP Continuous, 11.0A Max., 56 Frame Export (50 Hz): 2-Speed/2.0 HP continuous, 8.0A max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 10.0A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP continuous, 8.0A max.
Optional Pump 3:	N/A
Total Hydrojets:	44
Seat A Jets:	2 DX, 2 DVX, 2 DVR
Seat B Jets:	2 DL
Seat C Jets:	4 DX, 6 DL, 1 DST (Sidewall)
Seat D Jets:	2 DL
Seat E Jets:	2 DX, 4 DVR
Seat F Jets:	2 DX, 6 DXL
Seat G Jet:	1 DL
Footwell Jets (H):	8 DL
Air Controls/Massage Selectors:	4/1
Filter:	50 ft² Filter Cartridge System
Water Treatment:	Factory installed CLEARRAY® Water Purification System and CLEARRAY® PRO ₃ TECT™
Lighting:	CL LED Lighting System (Interior Surround)
Synthetic Cabinet:	Available in Coastal, Mahogany, Autumn Walnut
Shell Colors:	North America: Platinum, Celestite (Gypsum), Sahara, Monaco, Midnight, Porcelain Export (50 Hz): All North America Colors
Headrests:	Four, 1-Piece Gray
Heater:	North America (60 Hz): 5.5 kW, 240V High Flow Standard Export (50 Hz): 2.7 kW High Flow Standard
Electrical Requirements:	240 VAC, 60 Hz@40A, 50A or 60A Export (50 Hz): 230-240 VAC@1x20A, 1x16A/1x20A or 3x16A (see manual for more configurations); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.
Limited Warranty*	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Equipment and Controls, 3 Years Plumbing Component Leaks, 1 Year Cabinet, 1 Year Jets, 1 Year Stereo Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets, 2 Years Stereo
Waterfall Feature:	Variable Valve Control
Audio System (Optional):	Factory Installed BLUEWAVE® Spa Stereo System (Bluetooth®/Aux compat- ible only) with four speakers
Special Features (Optional):	Factory Installed SmartTub™ module
Insulation EPS (Option):	Shell Color: Platinum; Synthetic Cabinet: Coastal or Mahogany



*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 McKinley

Operation/Seat Depths



(A) Air Control - Activates Seat A Jets (2 DX, 2 DVR, 2 DVX) + Seat B Jets (2 DL) + Side Wall Jet (1 DST) + Seat G Jet (1 DL) + Footwell Jets (2 DL)

(B) Massage Selector [Pump 1]- Adjusts Seat A Jets + Seat B Jets + Seat G + Side Wall Jet + 2 Footwell Jets and Seat C Jets + 2 Footwell Jets

(C) Air Control - Activates Seat C Jets (4 DX, 6 DL) + Footwell Jets (2 DL)

(D) Air Control - Activates Seat D Jets (2 DL) + Seat E Jets (2 DX, 4 DVR) + Footwell Jets (2 DL)

(E) Air Control - Activates Seat F Jets (2 DX, 6 DXL) + Footwell Jets (2 DL)

(F) Waterfall Selector [Pump 1] - Controls Waterfall Output

- Jets Pump 1: Powers Seat A Jets + Seat B Jets + Side Wall Jet + Seat C Jets + Seat G Jet + 4 Footwell Jets when running

- Jets Pump 2: Powers Seat D Jets + Seat E Jets + Seat F Jets + 4 Footwell Jets when running

44 Total Jets (Stainless Steel Escutcheons Standard)



Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 25.50" (64.77 cm)

B = 25.00" (63.50 cm)

C = 26.50" (67.31 cm)

D = 22.25" (56.52 cm)

E = 25.75" (65.41 cm)

F = 20.50" (52.07 cm)

G = 26.63" (67.63 cm)

H = 16.63" (42.23 cm)

I = 31.50" (80.01 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5" (1.27 cm).**





Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 McKinley


Portable Dimensions

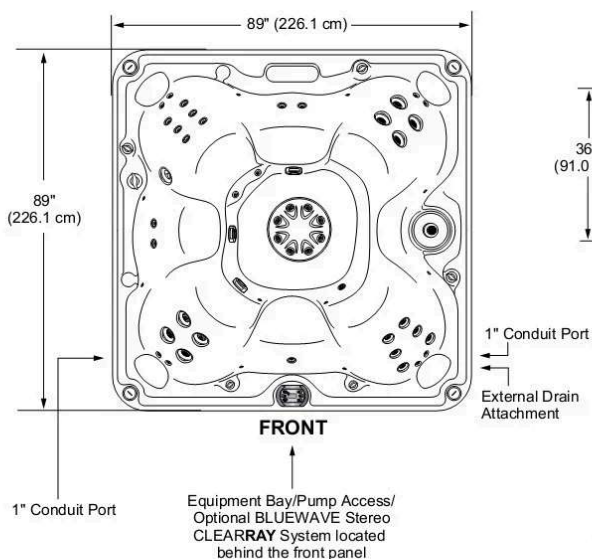TOP VIEW**FRONT VIEW**

(Front view with stereo option shown)

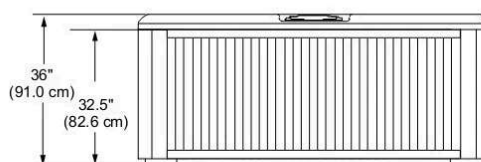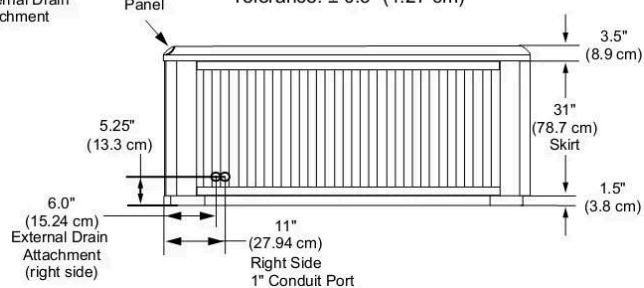Tolerance: $\pm 0.5"$ (1.27 cm)**RIGHT SIDE VIEW**Tolerance: $\pm 0.5"$ (1.27 cm)

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

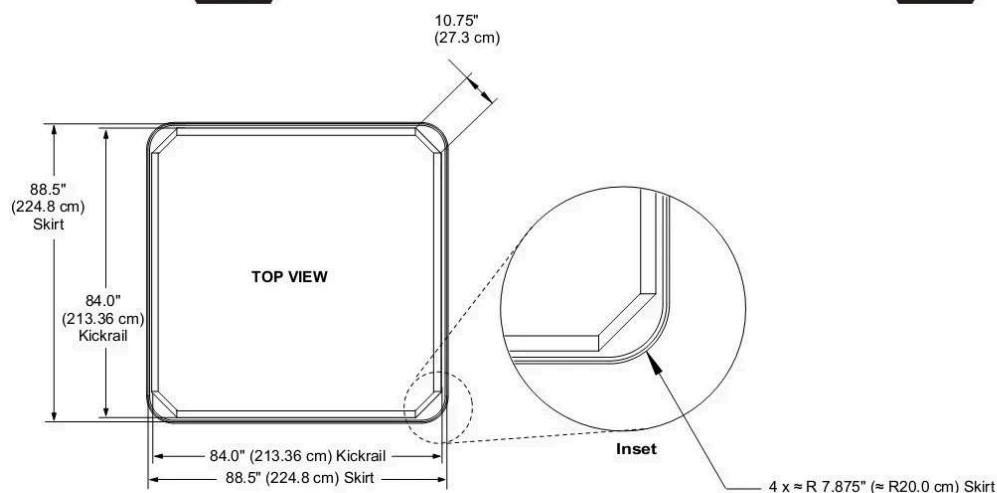

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Ramona™

Specifications

Dimensions:	89" x 89" x 36" (226 cm x 226 cm x 91.44 cm)
Seating Capacity:	5-6 Adults
Dry Weight:	734 lbs (333 kg)
Filled Weight (Spa Volume):	5,071 lbs (2,300 kg)
Filled Weight (Average Fill):	4,153 lbs (1,884 kg)
Water Capacity (Spa Volume):	520 US Gal (1,968 Liters)
Water Capacity (Average Fill):	410 US Gal (1,552 Liters)
Controls:	Solid-State Electronic Controls with LCD Readout, Programmable Water Temperature, Filtration, and Heat Cycles
Water Delivery:	2 High Flow Pumps
Pump 1:	North America (60 Hz): 2-Speed/2.5 HP Continuous, 11.0A Max., 56 Frame Export (50 Hz): 2-Speed/2.0 HP continuous, 8.0A max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 10.0A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP continuous, 8.0A max.
Optional Pump 3:	N/A
Total Hydrojets:	45
Seat A Jets:	2 DX, 8 DXL, 4 DV
Seat B Jets:	2 DX, 2 DVX, 2 DVR
Seat C Jets:	2 DX, 6 DL, 1 DST (Sidewall)
Seat D Jets:	4 DL
Seat E Jets:	2 DX, 4 DVR
Seat F Jets:	4 DXL
Foot Well Jets (G):	2 DVX
Air Controls/Massage Selectors:	3/1
Filter:	50 ft² Filter Cartridge System
Water Treatment:	Factory installed CLEARRAY® Water Purification System and CLEARRAY® PRO ₃ TECT™
Lighting:	CL LED Lighting System (Interior Surround)
Synthetic Cabinet:	Available in Coastal, Mahogany, Autumn Walnut
Shell Colors:	North America: Platinum, Celestite (Gypsum), Sahara, Monaco, Midnight, Porcelain Export (50 Hz): All North America Colors
Headrest:	Four, 1-Piece Gray
Heater:	North America (60 Hz): 5.5 kW, High Flow Standard Export (50 Hz): 2.7 kW, High Flow Standard
Electrical Requirements:	North America (60 Hz): 240 VAC, 60 Hz@40A, 50A or 60A; Export (50 Hz): 230-240 VAC@1x20A or 1x32A, 2x16A or 1x16A/1x20A or 3x16A (see manual for more configurations); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.
Limited Warranty*:	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Equipment and Controls, 3 Years Plumbing Component Leaks, 1 Year Cabinet, 1 Year Jets, 1 Year Stereo Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets, 2 Years Stereo
Waterfall Feature:	Variable Valve Control
Audio System (Optional):	Factory Installed BLUEWAVE® Spa Stereo System (Bluetooth®/Aux compatible only) with four speakers
Special Features (Optional):	Factory Installed SmartTub™ module
Insulation EPS (Option):	Shell Color: Platinum; Synthetic Cabinet: Coastal or Mahogany




*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Ramona

Operation/Seat Depths

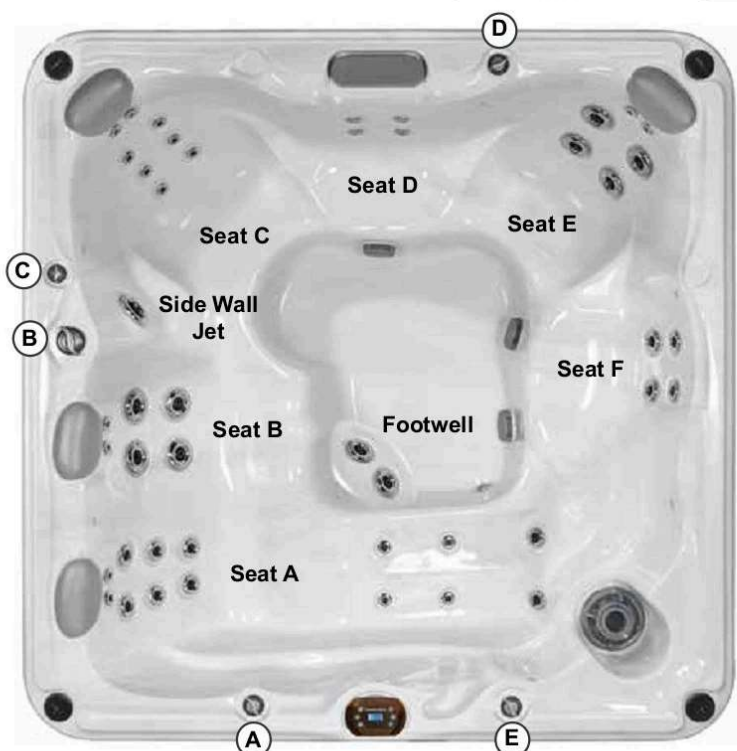

(A) Air Control - Activates Seat A Jets (2 DX, 8 DXL, 4 DV) + Seat B Jets (2 DX, 2 DVR, 2 DVX) + Seat F Jets (4 DXL)

(B) Massage Selector [Pump 1]- Adjusts Seat C Jets and Side Wall Jet + Seat D Jets + Seat E Jets

(C) Air Control - Activates Seat C Jets (2 DX, 6 DL)

(D) Air Control - Activates Side Wall Jet (1 DST) + Seat D Jets (4 DL) + Seat E Jets (2 DX, 4 DVR) + Footwell Jets (2 DVX)


(E) Waterfall Selector [Pump 1] - Controls Waterfall Output

- Jets Pump 1: Powers Seat C Jets + Side Wall Jet + Seat D Jets + Seat E Jets + Footwell Jets when running

- Jets Pump 2: Powers Seat A Jets + Seat B Jets + Seat F Jets

NOTE: Footwell Jets (2 DVX) are on at all times when jets pump 1 is running

45 Total Jets (Stainless Steel Escutcheons Standard)

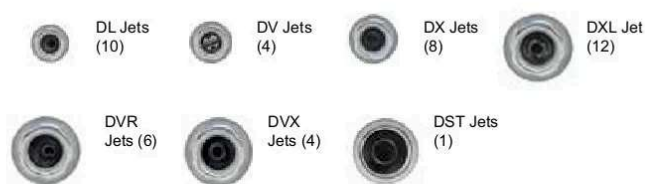

Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 25.00" (63.50 cm)

B = 24.50" (62.23 cm)

C = 27.25" (69.22 cm)


D = 22.13" (56.20 cm)

E = 26.75" (67.95 cm)

F = 20.13" (51.12 cm)

G = 32.00" (81.28 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance $\pm 0.5"$ (1.27 cm).




Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Ramona

Portable Dimensions

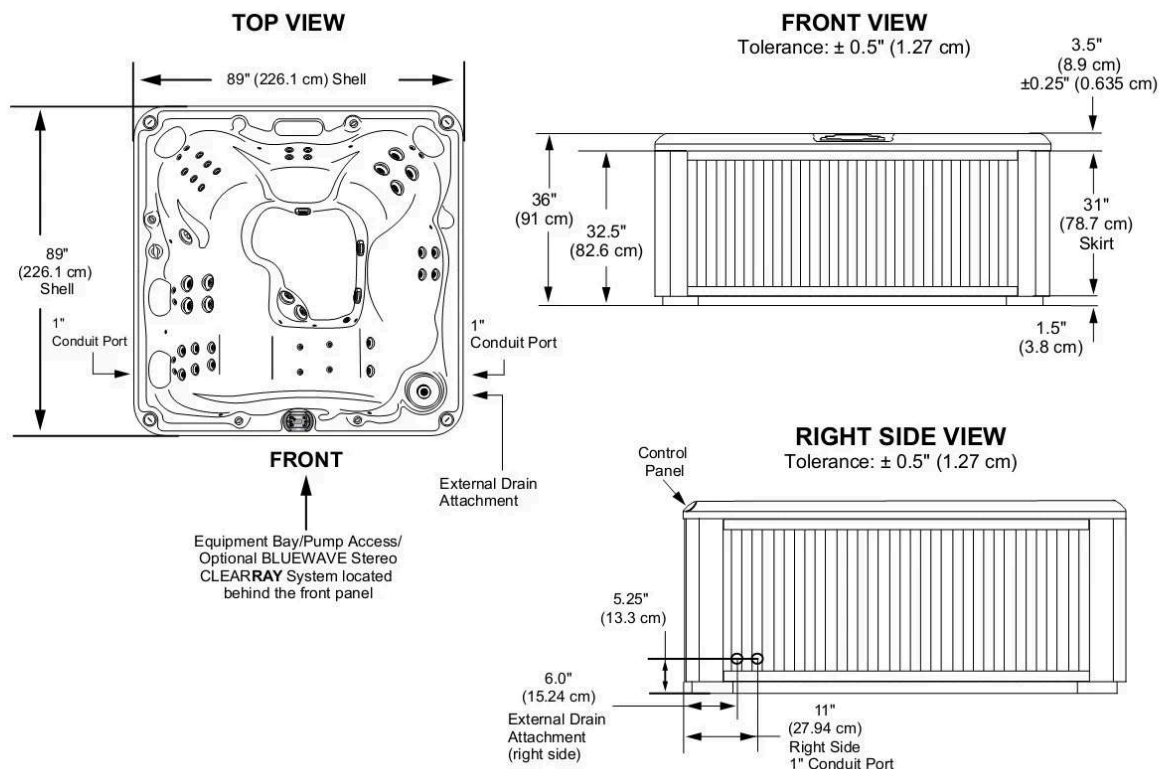

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

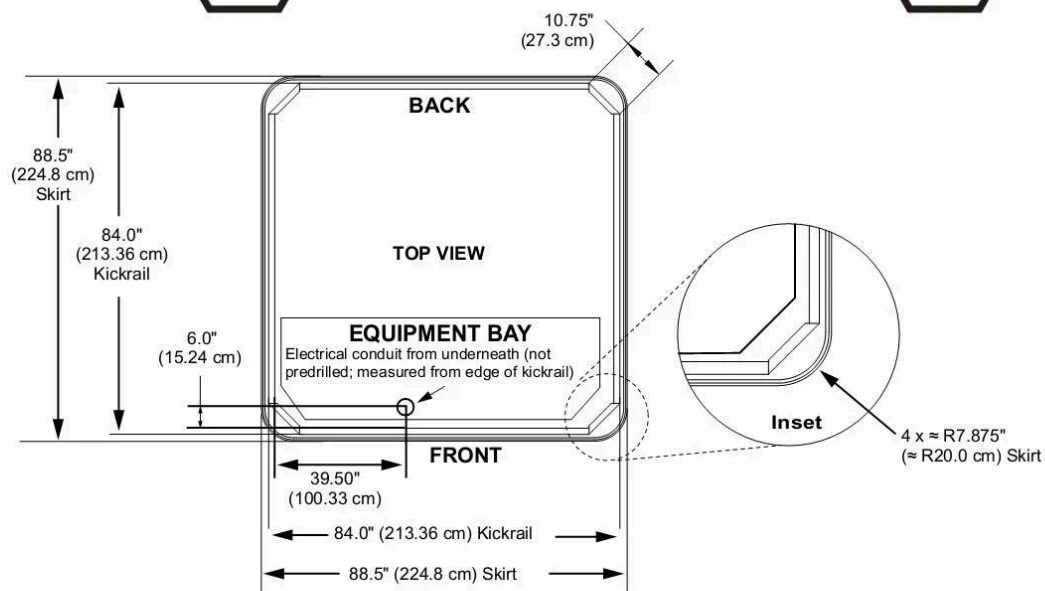

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Peyton®

Specifications

Dimensions:	84" x 84" x 36" (213.5 cm x 213.5 cm x 91.44 cm)
Seating Capacity:	6 Adults
Dry Weight:	654 lbs (297 kg)
Filled Weight (Spa Volume):	4,490 lbs (2,037 kg)
Filled Weight (Average Fill):	3,490 lbs (1,583 kg)
Water Capacity (Spa Volume):	460 US Gal (1,741 Liters)
Water Capacity (Average Fill):	340 US Gal (1,287 Liters)
Controls:	Solid-State Electronic Controls with LCD Readout, Programmable Water Temperature, Filtration, and Heat Cycles
Water Delivery:	2 High-Flow Pump
Pump 1:	North America (60 Hz): 2-Speed/2.5 HP Continuous, 11.0A Max., 56 Frame Export (50 Hz): 2-Speed/2.0 HP continuous, 8.0A max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 10A max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP continuous, 8.0A max.
Total Hydrojets:	35
Seat A Jets:	4 DV, 2 DVX, 6 DXL
Seat B Jets:	2 DL, 1 DVX
Seat C Jets:	2 DX, 4 DVR
Seat D Jets:	2 DXT
Seat E Jets:	2 DX, 6 DL
Seat F Jets:	2 DVX
Foot Well Jets (G):	2 DVX
Air Controls/Massage Selectors:	3 Air Control; No Massage Selector
Filter:	50 ft² Filter Cartridge System
Water Treatment:	Factory installed CLEARARRAY® Water Purification System and CLEARARRAY® PRO ₃ TECT™
Lighting:	CL LED Lighting System (Interior Surround)
Synthetic Cabinet:	Available in Coastal, Mahogany, Autumn Walnut
Shell Colors:	North America: Platinum, Celestite (Gypsum), Sahara, Monaco, Midnight, Porcelain Export (50 Hz): All North America colors
Headrest:	Three, 1-piece gray
Heater:	North America (60 Hz): 5.5 kW 240V High Flow Standard Export (50 Hz): 2.7 kW High Flow Standard
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A or 60A Export (50 Hz): 230-240 VAC@1x20A or 1x32A, 2x16A or 1x16A/1x20A or 3x16A (see manual for more configurations); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.
Limited Warranty*:	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets, 1 Year Stereo Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets, 2 Years Stereo
Waterfall Feature:	Variable Valve Control
Audio System (Optional):	Factory Installed BLUEWAVE® Spa Stereo System (Bluetooth®/Aux compatible only) with four speakers;
Special Features (Optional):	Factory Installed SmartTub™ module
Insulation EPS (Option):	Shell Color: Platinum; Synthetic Cabinet: Coastal or Mahogany



*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice


Sundance Spas 680 Peyton

Operation/Seat Depths



- A** Air Control - Activates Seat A Jets (4 DV, 2 DVX, 6 DXL) + Seat B Jets (2 DL, 1 DVX) + Seat F Jets (2 DVX)
 - B** Air Control - Activates Seat C Jets (2 DX, 4 DVR) + Footwell Jets (2 DVX)
 - C** Waterfall Selector [Pump 1] - Controls Waterfall Output
 - D** Air Control - Activates Seat D Jets (2 DXT) + Seat E Jets (6 DL, 2 DX)
- Jets Pump 1: Powers Seat A Jets + Seat B Jets + Seat F + Waterfall when running
 - Jets Pump 2: Seat C Jets + Seat D Jets + Seat E Jet + Footwell Jets when running

35 Total Jets (Stainless Steel Escutcheons Standard)

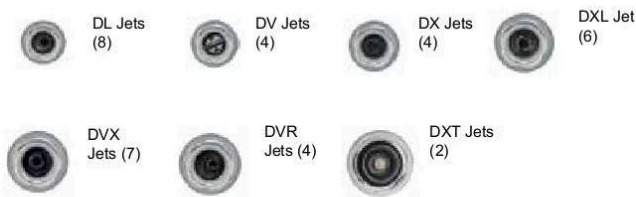

Spa Operation Subject To Change Without Notice

SEAT DEPTHS

- A = 25.00" (63.50 cm)**
- B = 26.75" (67.95 cm)**
- C = 27.50" (69.85 cm)**
- D = 23.00" (58.42 cm)**
- E = 27.00" (68.58 cm)**
- F = 20.50" (52.07 cm)**
- G = 32.00" (81.28 cm)**


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5" (1.27 cm).**




Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Peyton

Portable Dimensions

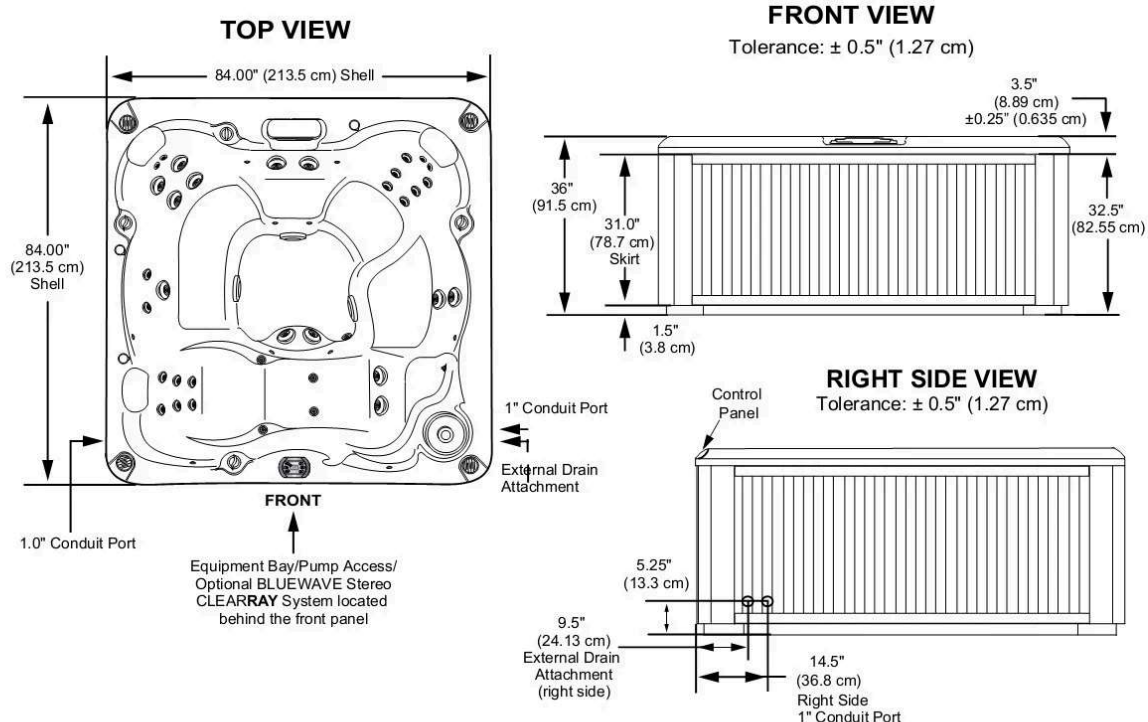

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

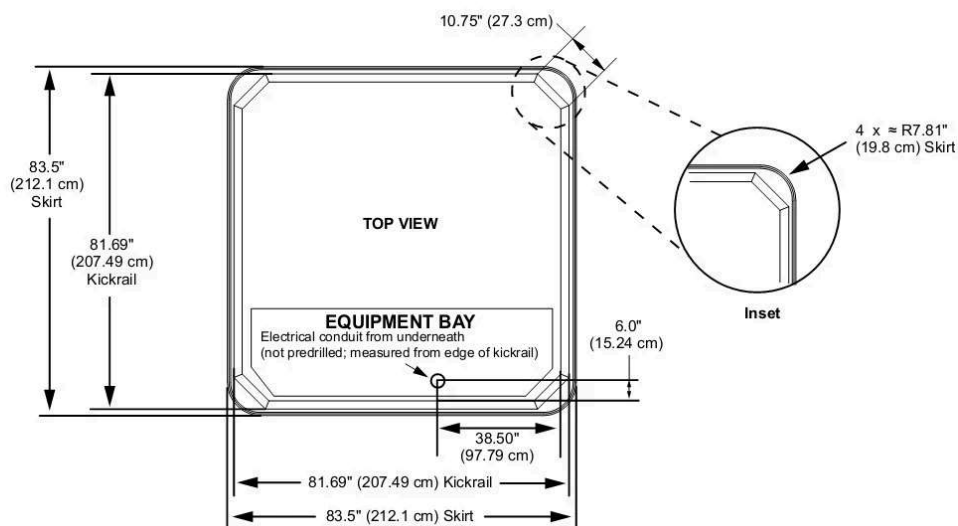

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Edison®

Specifications

Dimensions:	84" x 84" x 36" (213.5 cm x 213.5 cm x 91.44 cm)
Seating Capacity:	6 Adults
Dry Weight:	758 lbs (344 kg)
Filled Weight (Spa Volume):	4,511 lbs (2,046 kg)
Filled Weight (Average Fill):	3,677 lbs (1,668 kg)
Water Capacity (Spa Volume):	450 US Gal (1,703 Liters)
Water Capacity (Average Fill):	350 US Gal (1,325 Liters)
Controls:	Solid-State Electronic Controls with LCD Readout, Programmable Water Temperature, Filtration, and Heat Cycles
Water Delivery:	2 High-Flow Pump
Pump 1:	North America (60 Hz): 2-Speed/2.5 HP Continuous, 11.0A Max., 56 Frame Export (50 Hz): 2-Speed/2.0 HP continuous, 8.0A max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 10A max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP continuous, 8.0A max.
Total Hydrojets:	35
Seat A Jets:	3 DXL, 1 DVX
Seat B Jet:	2 DL
Seat C Jets:	2 DX, 4 DVR
Seat D Jet:	2 DST
Seat E Jets:	2 DX, 6 DL
Seat F Jet:	1 DL, 4 DXL
Foot Well Jets (G):	8 DL
Air Controls/Massage Selectors:	3 Air Control; No Massage Selector
Filter:	50 ft² Filter Cartridge System
Water Treatment:	Factory installed CLEARARRAY® Water Purification System and CLEARARRAY® PRO ₃ TECT™
Lighting:	CL Lighting LED System (Interior Surround)
Synthetic Cabinet:	Available in Coastal, Mahogany, Autumn Walnut
Shell Colors:	North America: Platinum, Celestite (Gypsum), Sahara, Monaco, Midnight, Porcelain Export (50 Hz): All North America colors
Headrest:	Four, 1-piece gray
Heater:	North America (60 Hz): 5.5 kW 240V High Flow Standard Export (50 Hz): 2.7 kW High Flow Standard
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A or 60A Export (50 Hz): 230-240 VAC@1x20A or 1x32A, 2x16A or 1x16A/1x20A or 3x16A (see manual for more configurations); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.
Limited Warranty*:	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets, 1 Year Stereo Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets, 2 Years Stereo
Waterfall Feature:	Variable Valve Control
Audio System (Optional):	Factory Installed BLUEWAVE® Spa Stereo System (Bluetooth®/Aux compatible only) with four speakers
Speial Features (Optional):	Factory Installed SmartTub™ module
Insulation EPS (Option):	Shell Color: Platinum; Synthetic Cabinet: Coastal or Mahogany



*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Edison

Operation/Seat Depths



- (A)** Air control - Activates Seat A Jets (1 DVX, 3 DXL) + Footwell Jets (2 DL)
- (B)** Waterfall Selector [Pump 1] - Controls Waterfall Output
- (C)** Air Control - Activates Seat D Jets (2 DST, 3 DXL) + Footwell Jets (2 DL)
- (D)** Air Control - Activates Seat C Jets (2 DX, 4 DVR) + Seat F Jet (1 DL, 4 DXL) + Footwell Jets (4 DL)

- Jets Pump 1: Powers Seat A Jets + Seat D Jets + Seat E + Footwell Jets (qty 4) + Waterfall when running
- Jets Pump 2: Seat C Jets + Seat F Jets + Footwell Jets (qty 4) when running

35 Total Jets (Stainless Steel Escutcheons Standard)



Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 25.38" (64.45 cm)
B = 25.00" (63.50 cm)
C = 26.25" (66.68 cm)
D = 22.00" (55.88 cm)
E = 25.63" (65.09 cm)
F = 20.63" (52.39 cm)

G = 26.63" (67.63 cm)
H = 16.00" (40.64 cm)
H = 31.88" (80.96 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance $\pm 0.5"$ (1.27 cm).**




Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Edison

Portable Dimensions

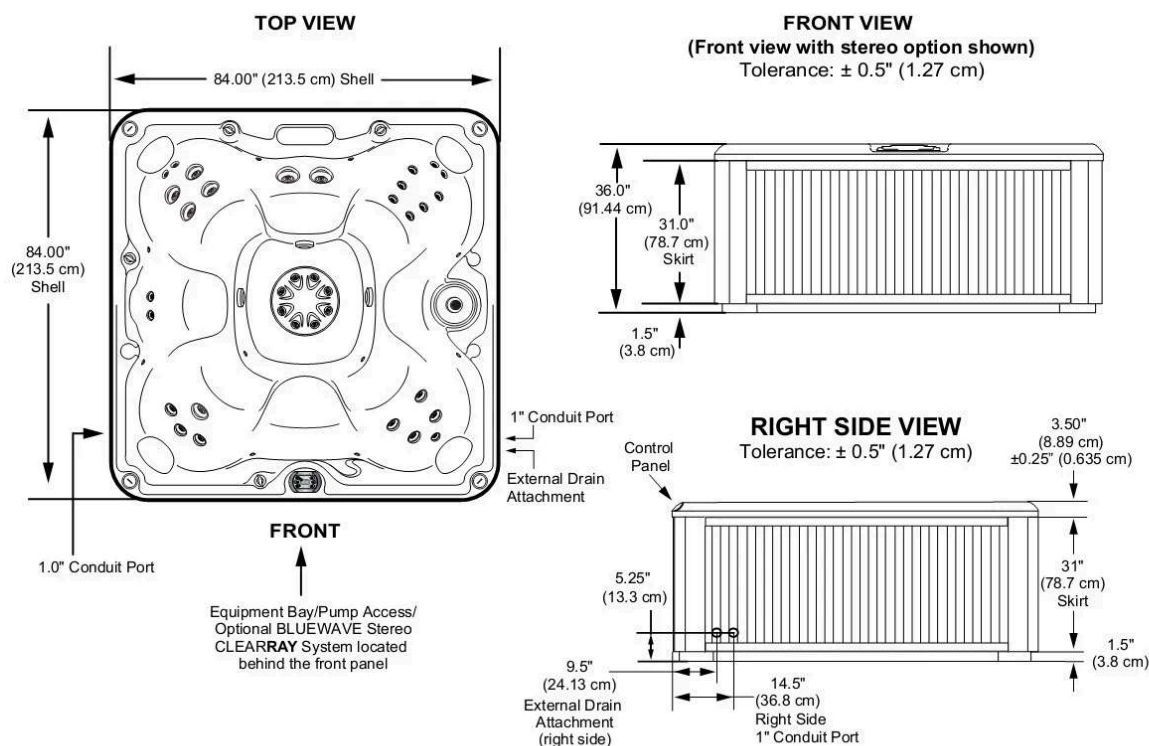

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

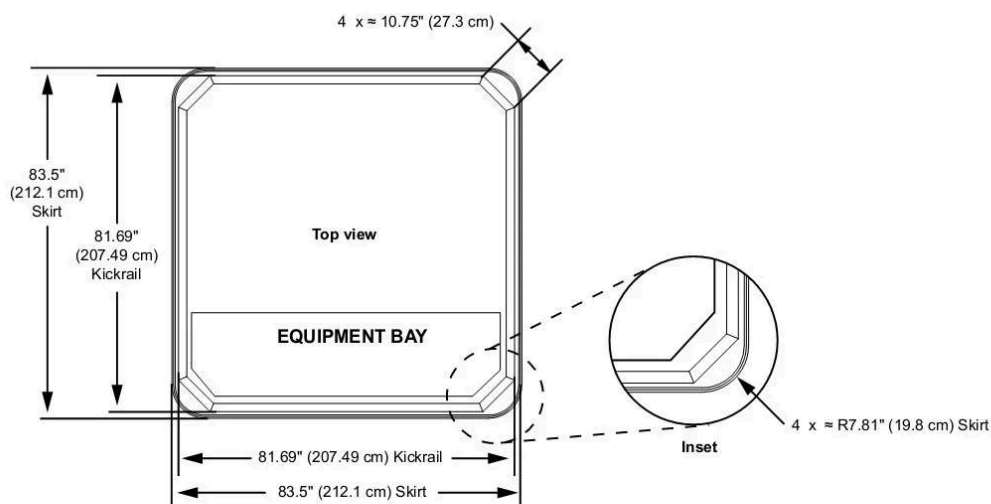


Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Prado™

Specifications

Dimensions	76" x 84" x 34.5" (193 cm x 213 cm x 87 cm)
Seating Capacity	4-5 Adults
Dry Weight	562 lbs (255 kg)
Filled Weight (Spa Volume)	4,219 lbs (1,914 kg)
Filled Weight (Average Fill)	3,517 lbs (1,596 kg)
Water Capacity (Spa Volume)	438 US gallons (1,659 Liters)
Water Capacity (Average Fill)	354 US gallons (1,340 Liters)
Electronic Controls	Solid state electronic controls with LCD readout, programmable temperature, filtration, and heat cycles
Pump 1	North America (60 Hz): 2-Speed, 2.5 HP brake, 1.5 HP continuous, 48 Frame Export (50 Hz): 2-Speed, 2.0 HP continuous
Total Hydrojets:	23
Seat A Jets:	3 DXL
Seat B Jet:	6 DXL
Seat C Jets:	4 DX, 2 DVX
Seat D Jet:	4 DVR
Foot Well Jets (E):	4 DL
Air Controls/Massage Selectors:	4 Air Control; No Massage Selector
Filter:	50 ft² Filter Cartridge System
Water Treatment:	Factory installed CLEARARRAY® Water Purification System and CLEARARRAY® PRO ₃ TECT™
Lighting:	6 LED bullet lights (4 above water; 2 underwater)
Synthetic Cabinet:	Available in Coastal, Mahogany, Autumn Walnut
Shell Colors:	North America: Platinum, Celestite (Gypsum), Sahara, Monaco, Midnight, Porcelain Export (50 Hz): All North America colors
Headrest:	Three, 1-piece gray
Heater:	North America (60 Hz): High Flow, 1 kW@120 VAC or Convertible to 4 kW@240 VAC; Export (50 Hz): High Flow, 2.7 kW
Electrical Requirements:	North America Convertible Model (60 Hz): 120 VAC@15A with Supplied GFCI Cord or 240 VAC@30A or 40A (Hard Wired Only); Export (50 Hz): 230-240 VAC@1x20A or 2x16A (see manual for more configurations); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.
Limited Warranty*:	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets, 1 Year Stereo Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets, 2 Years Stereo
Waterfall Feature:	One with ON/OFF valve
Audio System (Optional):	Factory Installed BLUEWAVE® Spa Stereo System (Bluetooth®/Aux compatible only) with four speakers;
Special Features (Optional):	Factory Installed SmartTub™ module
Insulation EPS (Option):	Shell Color: Platinum; Synthetic Cabinet: Coastal or Mahogany



*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Prado

Operation/Seat Depths



- (A) Air control - Activates Seat A Jets (3 DXL) + Footwell Jets (2 DL)
- (B) Air control - Activates Seat B Jets (6 DXL)
- (C) Air Control - Activates Seat C Jets (4 DX, 2 DVX)
- (D) Air Control - Activates Seat D Jets (4 DVR) + Footwell Jets (2 DL)

• Jets Pump 1: Powers All Jets + Waterfall when running

23 Total Jets (Stainless Steel Escutcheons Standard)




Spa Operation Subject To Change Without Notice

SEAT DEPTHS

- A = 25.50" (64.7 cm)
- B = 27.50" (69.9 cm)
- C = 27.50" (69.9 cm)
- D = 27.40" (69.6 cm)
- E = 30.25" (76.8 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance ± 0.5" (1.27 cm).




Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Prado

Portable Dimensions

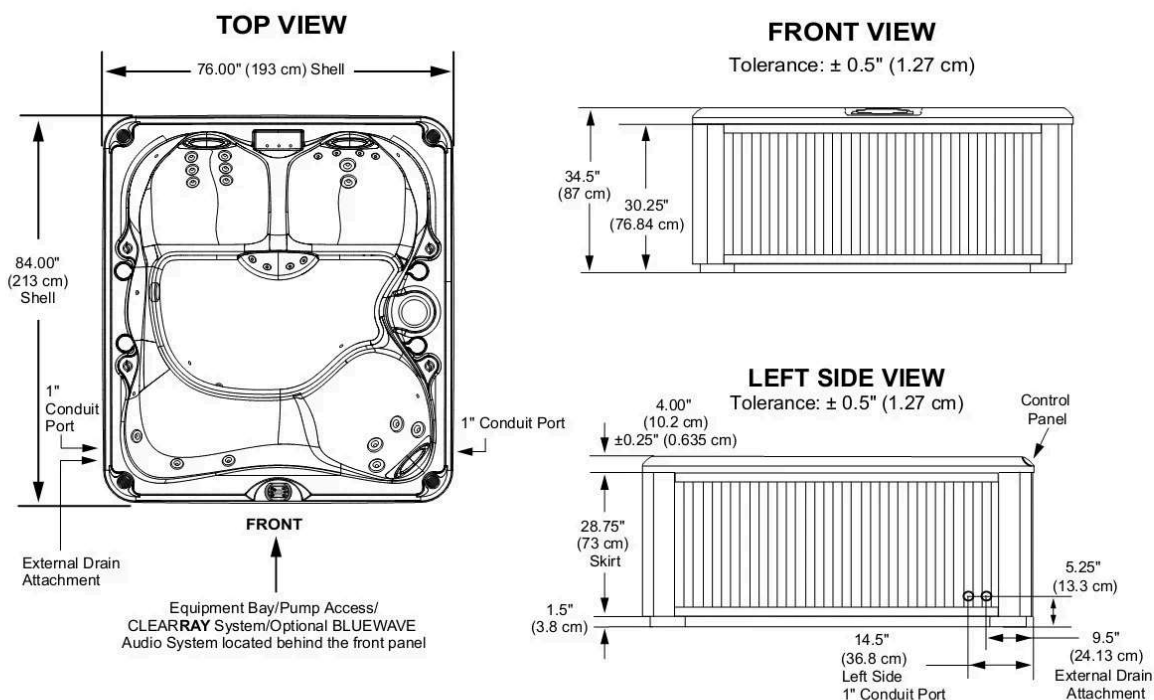


IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

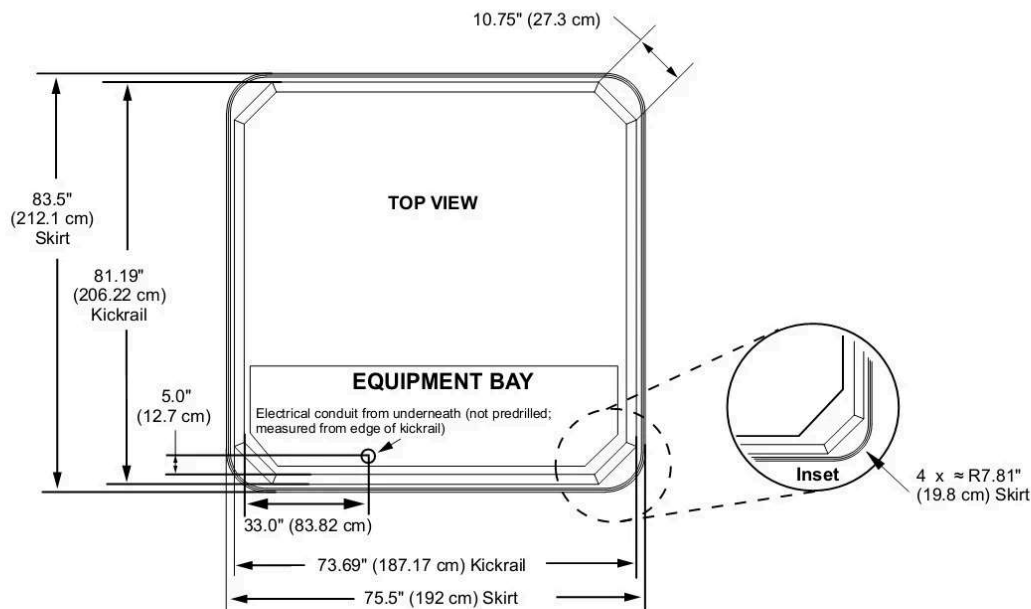

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Alicia™

Specifications

Dimensions	76" x 66" x 32" (193 cm x 168 cm x 81 cm)	
Seating Capacity	2-3 Adults	
Dry Weight	492 lbs (223 kg)	
Filled Weight (Spa Volume)	2,780 lbs (1,261 kg)	
Filled Weight (Average Fill)	2,329 lbs (1,056 kg)	
Water Capacity (Spa Volume)	274 US gallons (1,037 Liters)	
Water Capacity (Average Fill)	220 US gallons (833 Liters)	
Electronic Controls	Solid state electronic controls with LCD readout, programmable temperature, filtration, and heat cycles	
Pump 1	North America (60 Hz): 2-Speed, 2.5 HP brake, 1.5 HP continuous, 48 Frame Export: (50 Hz): 2-Speed, 2.0 HP continuous	
Total Hydrojets:	19	
Seat A Jets:	4 DX	
Seat B Jet:	6 DL, 4 DV, 2 DVR	
Seat C Jets:	3 DXL	
Air Controls:	3	
Massage Selectors:	None	
Filter:	50 ft² Filter Cartridge System	
Water Treatment:	Factory installed CLEARRAY® Water Purification System and CLEARRAY® PRO ₃ TECT™	
Lighting:	6 LED bullet lights (4 above water; 2 underwater)	
Synthetic Cabinet:	Available in Coastal, Mahogany, Autumn Walnut	
Shell Colors:	Platinum, Celestite (Gypsum), Sahara, Monaco, Midnight, Porcelain	
Headrest:	1	
Heater:	North America (60 Hz): High Flow, 1 kW@120 VAC or Convertible to 4 kW@240 VAC; Export: (50 Hz): High Flow, 2.7 kW	
Electrical Requirements:	North America Convertible Model (60 Hz): 120 VAC@15A with Supplied GFCI Cord or 240 VAC@30A or 40A (Hard Wired Only); Export (50 Hz): 230-240 VAC@1x20A or 2x16A (see manual for more configurations); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.	
Limited Warranty*:	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets, 1 Year Stereo Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets, 2 Years Stereo	
Waterfall Feature:	One with ON/OFF valve	
Audio System (Optional):	Factory Installed BLUEWAVE® Spa Stereo System (Bluetooth®/Aux compatible only) with four speakers	
Special Features (Optional):	Factory Installed SmartTub™ module	
Insulation EPS (Option):	Shell Color: Platinum; Synthetic Cabinet: Coastal or Mahogany	

*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Alicia

Operation/Seat Depths



- (A)** Air control - Activates Seat A Jets (4 DX)
- (B)** Air control - Activates Seat B Jets (6 DL, 4 DV, 2 DVR)
- (C)** Air Control - Activates Seat C Jets (3 DXL)

• Jets Pump 1: Powers All Jets + Waterfall when running

19 Total Jets (Stainless Steel Escutcheons Standard)



Spa Operation Subject To Change Without Notice

SEAT DEPTHS


A = 28.25" (71.8 cm)

B = 27.00" (68.6 cm)

C = 27.50" (69.9 cm)

D = 28.70" (73.2 cm)

Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance $\pm 0.5"$ (1.27 cm).




*(See Warranty Document for Specific Details)


Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Alicia

Portable Dimensions

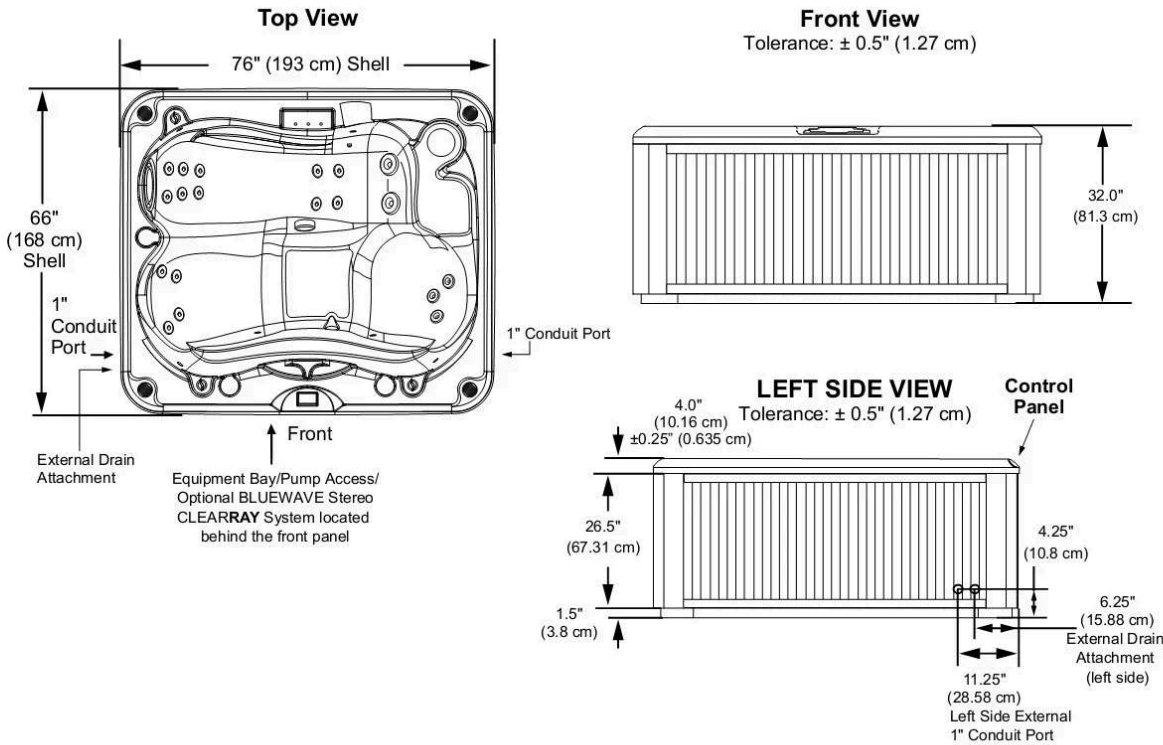

STOP **IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.** **STOP**

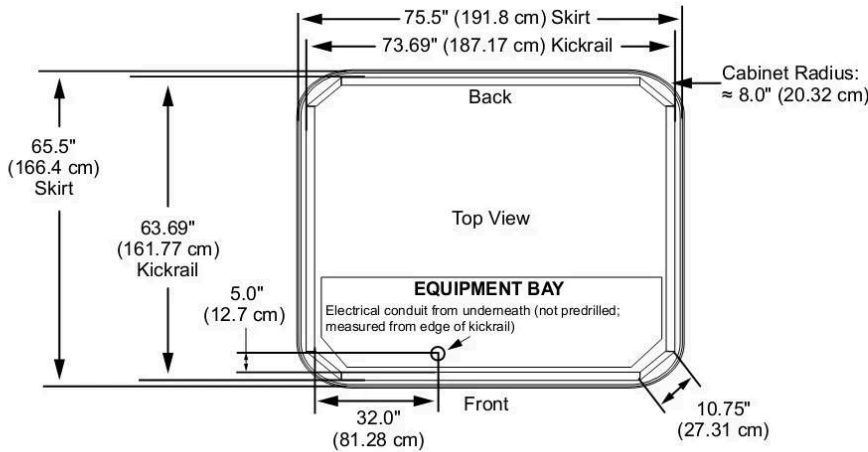

Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Denali®

Specifications

Dimensions:	78.5" Round x 36" (200 cm Round x 91.5 cm)
Seating Capacity:	4 Adults
Dry Weight:	560 lbs (254 kg)
Filled Weight (Spa Volume):	3,062 lbs (1,389 kg)
Filled Weight (Average Fill):	2,562 lbs (1,162 kg)
Water Capacity (Spa Volume):	300 US Gal (1,136 Liters)
Water Capacity (Average Fill):	240 US Gal (908 Liters)
Controls:	Solid-State Electronic Controls with LCD Readout, Programmable Water Temperature, Filtration, and Heat Cycles
Water Delivery:	1 High Flow Pump
Pump 1:	North America (60 Hz): 1.5 HP/2-Speed Continuous, 11.0A max., 48 Frame Export (50 Hz): 2.0 HP/2-Speed Continuous, 8.0A max.
Total Hydrojets:	20
Seat A Jets:	3 DXL
Seat B Jets:	3 DVX
Seat C Jets:	8 DX
Seat D Jets:	4 DXL
Footwell Jet (E):	1 DVX
Divert-A-Jet:	1
Air Controls/Massage Selectors:	3 Air Controls; No Massage Selectors
Filter:	50 ft² Filter Cartridge System
Water Treatment:	Factory installed CLEARRAY® Water Purification System and CLEARRAY® PRO ₃ TECT™
Lighting:	SunGlow Multi-Color LED Light
Synthetic Cabinet:	Available in Coastal, Mahogany, Autumn Walnut
Shell Colors:	North America: Platinum, Celestite (Gypsum), Sahara, Monaco, Midnight, Porcelain Export (50 Hz): All North American colors
Heater:	North America (60 Hz): High-Flow, 1 kW@120 VAC or Convertible to 4 kW@240 VAC; Export (50 Hz): High-Flow, 2.7 kW
Electrical Requirements:	North America Convertible Model (60 Hz): 120 VAC@15A with Supplied GFCI Cord or 240 VAC@30A or 40A (Hard Wired Only); Export (50 Hz): 230-240 VAC@1x20A or 2x16A (see manual for more configurations); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.
Limited Warranty*:	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets
Audio System (Optional):	Audio System Not Offered on This Model
Special Features:	Factory Installed SmartTub™ module
Insulation EPS (Option):	N/A



*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Denali

Operation/Seat Depths



- (A)** Air Control - Activates the Divert-A-Jet (D)
- (B)** Air Control - Activates Seat A Jets (3 DXL), Seat B Jets (3 DVX), Seat D Jets (4 DXL)
- (C)** Air Control - Activates Seat C Jets (8 DX) and Footwell Jet (1 DVX)
- (D)** Divert-A-Jet - Adjusts Massage Levels Between itself and Seat A Jets + Seat B Jets + Seat D Jets

Seat C Jets + All Footwell Jets are on all the time when the jets pump is running.

20 Total Jets (Stainless Steel Standard except Divert-A-Jet)



Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 24.75" (62.87 cm)
B = 26.75" (67.95 cm)
C = 26.75" (67.95 cm)
D = 26.75" (67.95 cm)
E = 17.00" (43.18 cm)
F = 32.00" (81.28 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance $\pm 0.5"$ (1.27 cm).**




Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Denali

Portable Dimensions

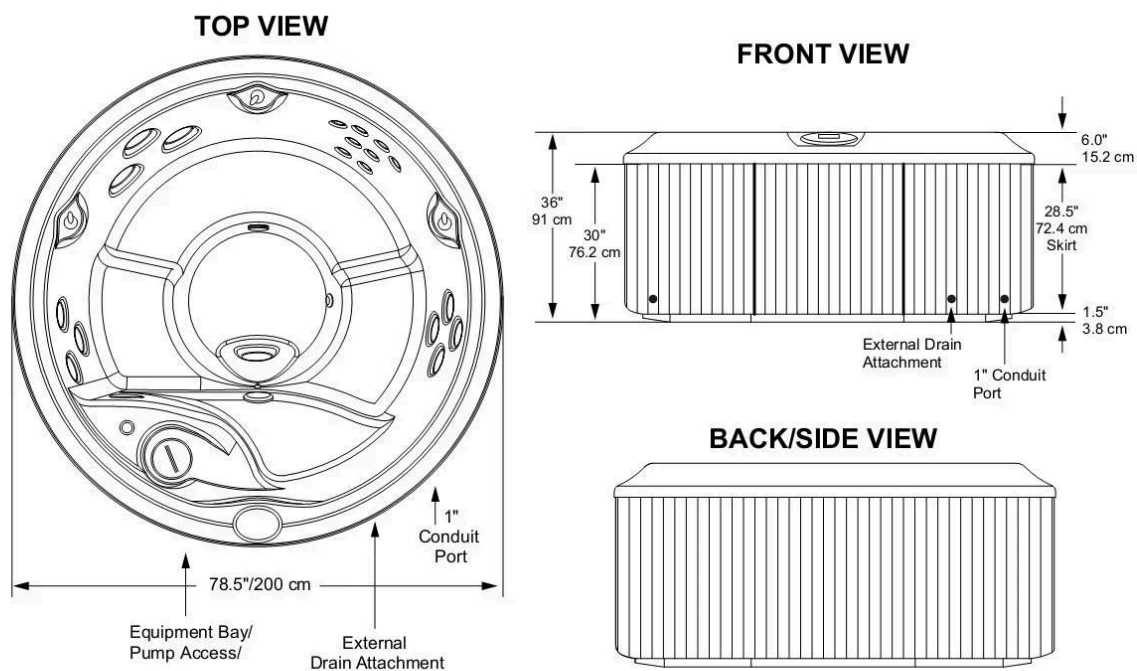

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

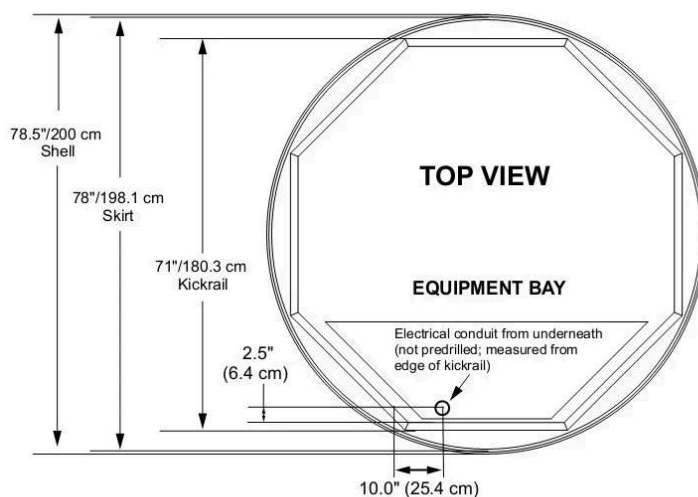

Dimensions/Specifications Subject To Change Without Notice

Sundance® Splash Berkeley™ 40 Jets

Specifications

Seating Capacity.....	6 Adults
Dimensions	78" x 78" x 36" (198 cm x 198 cm x 91 cm);
Dry Weight.....	416 lbs (189 kg)
Filled Weight (Spa Volume)	3,894 lbs (1,766 kg)
Filled Weight (Average Fill).....	3,001 lbs (1,361 kg)
Water Capacity (Spa Volume)	417 US gallons (1,579 Liters)
Water Capacity (Average Fill)	310 US gallons (1,173 Liters)
Electronic Controls	Digital Touch Controller. Offers customizing of cleaning cycles and water temperature setting.
Pump 1.....	North America (60 Hz): 2-Speed, 3.0 HPR continuous Export (50 Hz): N/A
Pump 2.....	North America (60 Hz): 1-Speed, 2.5 HPR continuous Export (50 Hz): N/A
Circulation Pump.....	N/A
Total Jets	40
Seat A Jets	6 DirectionalMax1, 6 DirectionalMax2, 3 DirectMiniMax
Seat B Jets	1 DirectionalMax1, 1 DirectMiniMax
Seat C Jets	6 DirectionalMax2, 2 DirectMiniMax
Seat D Jets	2 DirectionalMax1, 2 DirectMiniMax
Seat E Jets	4 DirectionalMax1, 2 DirectionalMax1, 2 DirectMiniMax
Seat F Jets	1 DirectionalMax1
Footwell (G).....	2 DirectionalMax1
Massage Selectors	N/A
Air Controls.....	3
Water Management System	One Easy Klean 30 ft ² filter cartridge; Optional factory installed Ozone Export (50 Hz): N/A
LED Lighting	Multicolor Waterfall light; Footwell light, Exterior corner lights (8 qty)
Shell/Cabinet Colors	Mystic Sparkle, Tuscan Sparkle, Night Sparkle, Glacier Sparkle
Headrests	3
Waterfalls	One with independent flow rate (on or off) adjustment; powered by pump 1
Heater:	Hi Flow 4kW Export (50 Hz): N/A
Electrical Requirements:	North America (60 Hz): 240 VAC@50A Export (50 Hz): N/A
Warranty*	North America (60 Hz): 5 Years Shell, 5 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 1 Year Lights; Export (50 Hz): N/A
Special Features	Optional Suite Package Add-On




*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Splash Berkeley 40 Jets

Operation/Seat Depths

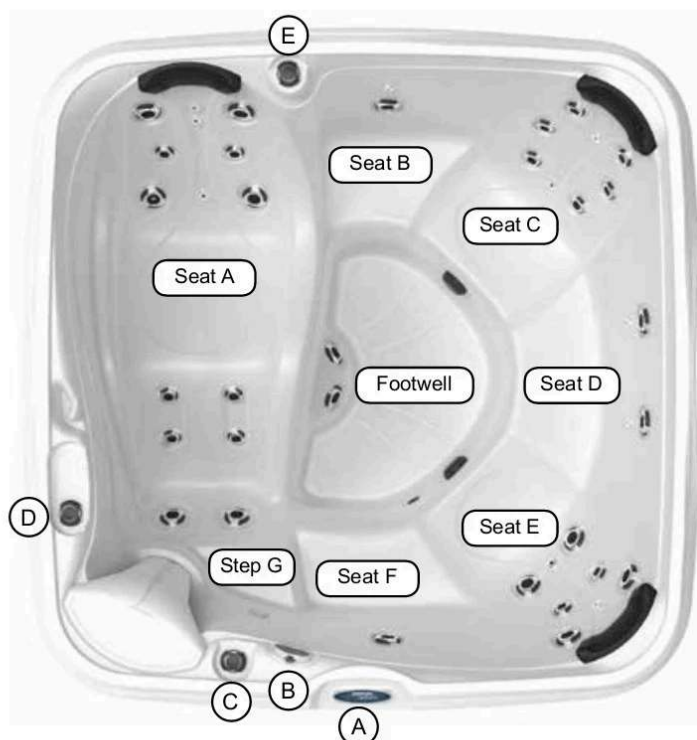

- (A) Topside Control - Activate Jet Pumps, Light and Control Water Temperature
 - (B) Water Feature Control - Controls Water Feature Output.
 - (C) Air Control - Activates Seat D Jets (2 DirectionalMax1 Jets, 2 DirectMiniMax Jets), Seat E Jets (4 DirectionalMax1 Jets, 2 DirectionalMax2 Jets, 2 DirectMiniMax Jets), Seat F Jets (1 DirectionalMax1 Jets)
 - (D) Air Control - Activates Seat A Jets (6 DirectionalMax1 Jets, 6 DirectionalMax2 Jets, 3 DirectMiniMax Jets)
 - (E) Air Control - Activates Seat B Jets (1 DirectionalMax1 Jet, 1 DirectMiniMax Jet), Seat C Jets (6 DirectionalMax2 Jets, 2 DirectMiniMax Jets), Footwell Jets (2 DirectionalMax1 Jets)
- Jet Pump 1: Seats B, C, D, E, F and footwell jets
 - Jet Pump 2: Seat A

40 Total Jets

DirectionalMax1
Jets (16)



DirectionalMax2
Jets (14)



DirectMiniMax
Jets (10)




Spa Operation Subject To Change Without Notice

SEAT DEPTHS

- A = 25.75" (65.40 cm)
- B = 24.50" (62.23 cm)
- C = 28.00" (71.12 cm)
- D = 24.75" (62.86 cm)
- E = 26.50" (67.30 cm)
- F = 23.25" (59.06 cm)
- G = 19.00" (48.26 cm)
- H = 34.50" (87.63 cm)


Listed dimensions represent distance from top of spa to lowest point in seat.
Tolerance: $\pm 0.5"$ (1.27 cm)

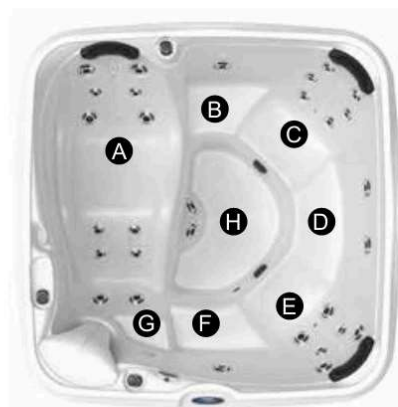

Dimensions/Specifications Subject To Change Without Notice

Sundance Splash Berkeley 40 Jets

Portable Dimensions

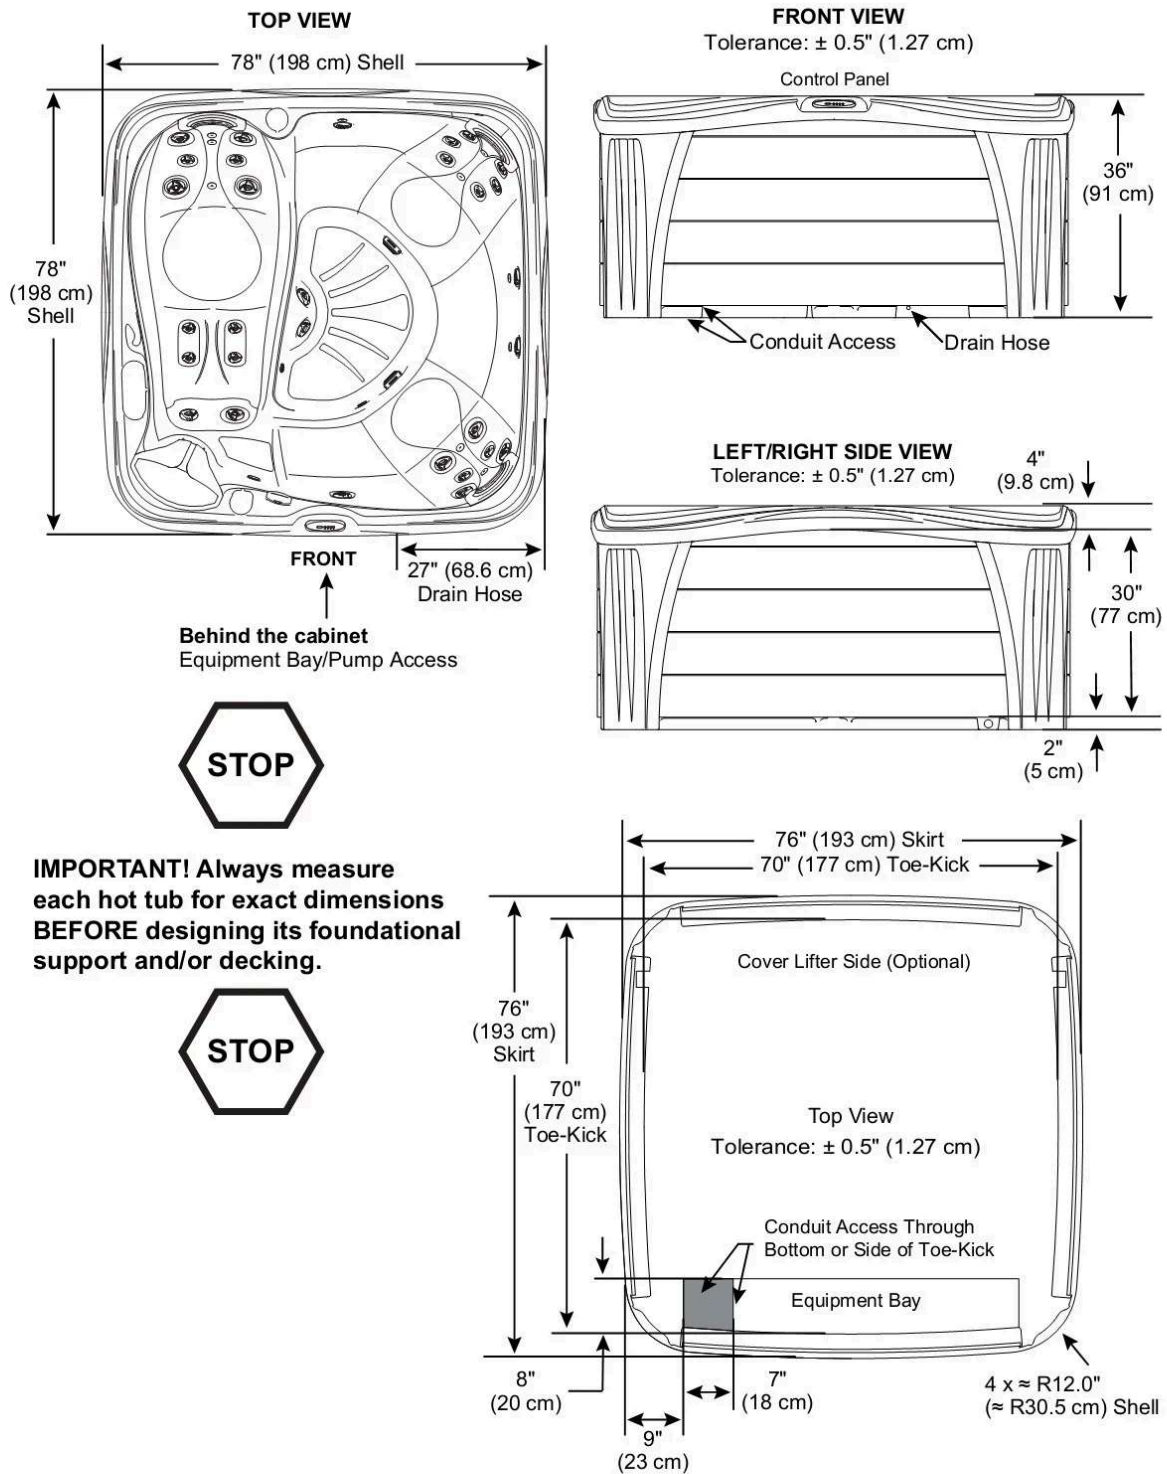


Dimensions/Specifications Subject To Change Without Notice

Sundance® Splash Berkeley™ 30 Jets

Specifications

Seating Capacity.....	6 Adults
Dimensions	78" x 78" x 36" (198 cm x 198 cm x 91 cm);
Dry Weight.....	386 lbs (175 kg)
Filled Weight (Spa Volume)	3,864 lbs (1,753 kg)
Filled Weight (Average Fill).....	2,971 lbs (1,348 kg)
Water Capacity (Spa Volume)	417 US gallons (1,579 Liters)
Water Capacity (Average Fill)	310 US gallons (1,173 Liters)
Electronic Controls	Digital Touch Controller. Offers customizing of cleaning cycles and water temperature setting.
Pump 1.....	North America (60 Hz): 2-Speed, 3.0 HPR continuous Export (50 Hz): 2 kW, 2-Speed
Pump 2.....	N/A Export (50 Hz): N/A
Circulation Pump.....	N/A
Total Jets	30
Seat A Jets	6 DirectionalMax1, 6 DirectionalMax2
Seat B Jets	1 DirectionalMax1
Seat C Jets	6 DirectionalMax2
Seat D Jets	2 DirectionalMax1
Seat E Jets	4 DirectionalMax1, 2 DirectionalMax2
Seat F Jets.....	1 DirectionalMax1
Footwell (G).....	2 DirectionalMax1
Massage Selectors	N/A
Air Controls.....	2
Water Management System.....	One Easy Klean 30 ft ² filter cartridge; Optional factory installed Ozone Export (50 Hz): Optional factory installed Ozone
LED Lighting	Multicolor Waterfall light; Footwell light, Exterior corner lights (8 qty)
Shell/Cabinet Colors	Mystic Sparkle, Tuscan Sparkle, Night Sparkle, Glacier Sparkle
Headrests	3
Waterfalls	One with independent flow rate (on or off) adjustment; powered by pump 1
Heater:	Hi Flow 1.0kW/4kW Export (50 Hz): Hi Flow 3.0kW
Electrical Requirements:	North America (60 Hz): Convertible 120 VAC@15A Export (50 Hz): 230-240V@1x16A, 1X32A
Warranty*	North America (60 Hz): 5 Years Shell, 5 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 1 Year Lights; Export (50 Hz): 5 Years Shell, 5 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 2 Years Cabinet, 2 Years Jets, 2 Years Lights;
Special Features	Optional Suite Package Add-On

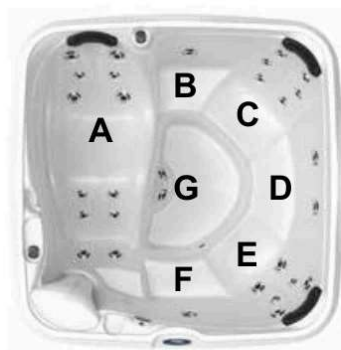


*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Splash Berkeley 30 Jets

Operation/Seat Depths

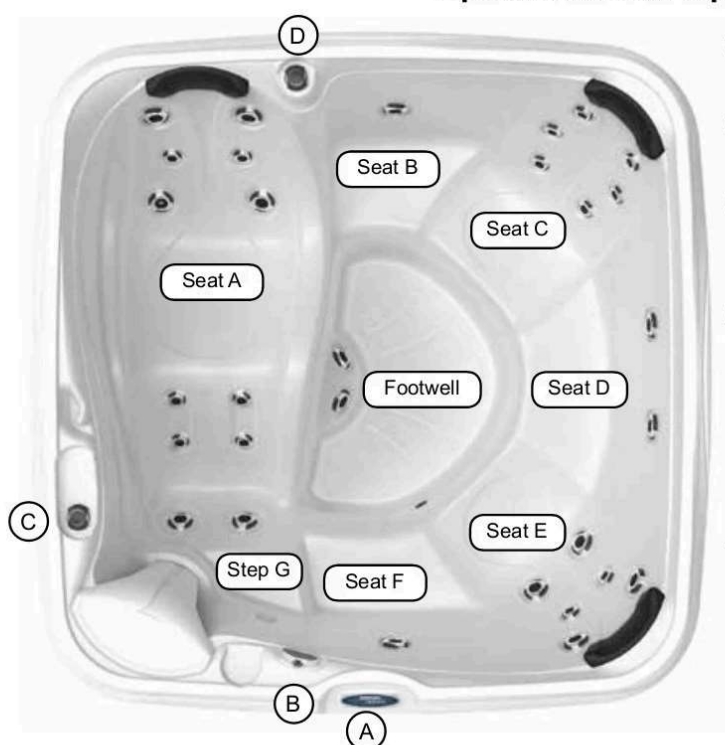

- (A) Topside Control - Activate Jet Pump, Light and Control Water Temperature
 - (B) Water Feature Control - Controls Water Feature Output.
 - (C) Air Control - Activates Seat A Jets (6 DirectionalMax1 Jets, 6 DirectionalMax2 Jets)
 - (D) Air Control - Activates Seat B Jets (1 DirectionalMax1 Jet), Seat C Jets (6 DirectionalMax2 Jets), Seat D Jets (2 DirectionalMax1 Jets), Seat E Jets (4 DirectionalMax1 Jets, 2 DirectionalMax2 Jets), Seat F Jets (1 DirectionalMax1 Jet), Footwell Jets (2 DirectionalMax1 Jets)
- Jet Pump 1: All seats and footwell jets

30 Total Jets

DirectionalMax1
Jets (16)



DirectionalMax2
Jets (14)



Spa Operation Subject To Change Without Notice

SEAT DEPTHS

- A = 25.75" (65.40 cm)
- B = 24.50" (62.23 cm)
- C = 28.00" (71.12 cm)
- D = 24.75" (62.86 cm)
- E = 26.50" (67.30 cm)
- F = 23.25" (59.06 cm)
- G = 19.00" (48.26 cm)
- H = 34.50" (87.63 cm)


Listed dimensions represent distance from top of spa to lowest point in seat.
Tolerance: $\pm 0.5"$ (1.27 cm)



Dimensions/Specifications Subject To Change Without Notice

Sundance Splash Berkeley 30 Jets

Portable Dimensions

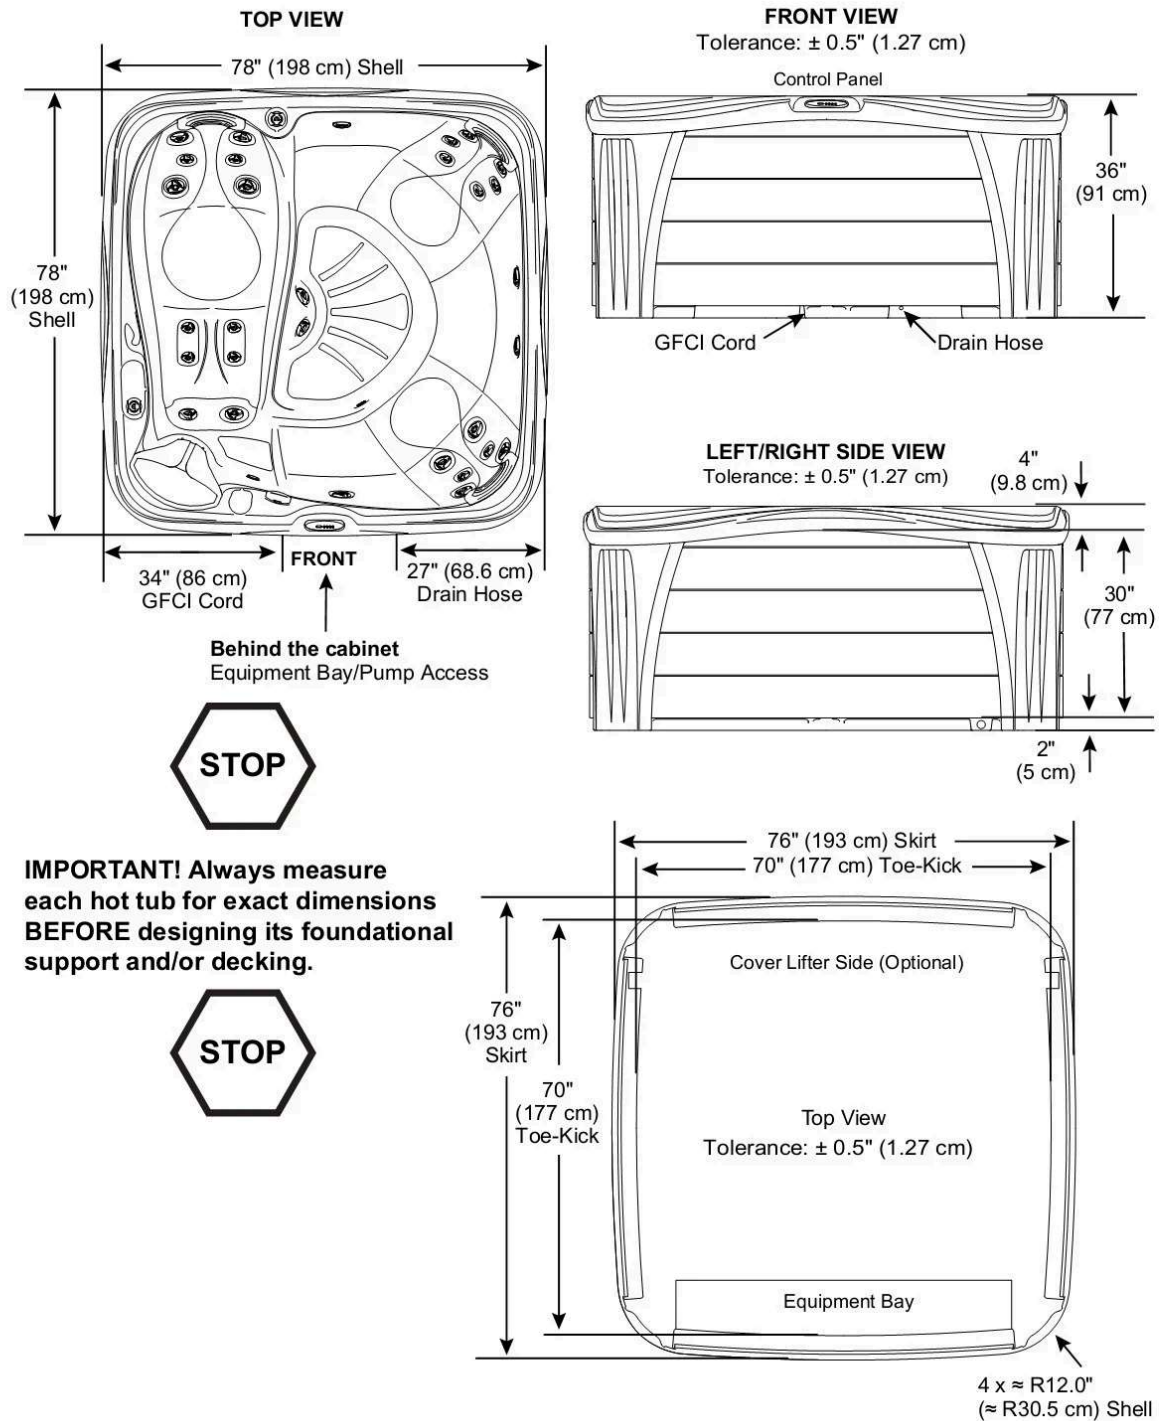

Dimensions/Specifications Subject To Change Without Notice

Sundance® Splash Brook™ 40 Jets

Specifications

Seating Capacity.....	6 Adults
Dimensions	78" x 78" x 36" (198 cm x 198 cm x 91 cm);
Dry Weight.....	472 lbs (214 kg)
Filled Weight (Spa Volume)	4,175 lbs (1,894 kg)
Filled Weight (Average Fill).....	3,208 lbs (1,455 kg)
Water Capacity (Spa Volume)	444 US gallons (1,681 Liters)
Water Capacity (Average Fill)	328 US gallons (1,242 Liters)
Electronic Controls	Digital Touch Controller. Offers customizing of cleaning cycles and water temperature setting.
Pump 1	North America (60 Hz): 2-Speed, 3.0 HP continuous Export (50 Hz): N/A
Pump 2	North America (60 Hz): 1-Speed, 2.5 HP continuous Export (50 Hz): N/A
Circulation Pump.....	N/A
Total Jets	40
Seat A Jets	4 DirectionalMax1 Jets, 2 DirectionalMax2 Jets, 2 DirectMiniMax Jets
Seat B Jets	2 DirectionalMax1 Jets
Seat C Jets	8 DirectionalMax2 Jets, 4 DirectMiniMax Jets
Seat D Jets	6 DirectionalMax2 Jets, 2 DirectMiniMax Jets
Seat E Jets	2 DirectionalMax1 Jets
Seat F Jets	4 DirectionalMax1 Jets, 2 DirectionalMax2 Jets, 2 DirectMiniMax Jets
Massage Selectors	N/A
Air Controls.....	3
Water Management System.....	One Easy Kleen 30 ft ² filter cartridge; Optional factory installed Ozone Export (50 Hz): N/A
LED Lighting	Multicolor waterfall light; Exterior corner light (white color only)
Shell/Cabinet Colors	Mystic Sparkle, Tuscan Sparkle, Night Sparkle, Glacier Sparkle
Headrests	4
Waterfalls	One with independent flow rate (on or off) adjustment; powered by pump 1
Heater:	Hi Flow 1.0kW/4kW Export (50 Hz): N/A
Electrical Requirements:	North America (60 Hz): 240 VAC@30A or 40A Export (50 Hz): N/A
Warranty*	North America (60 Hz): 5 Years Shell, 5 Years Shell Surface, 1 Year Plumbing Component Leaks, 1 Year Equipment and Controls, 1 Year Cabinet, 1 Year Jets, 1 Year Lights;
Special Features	N/A



*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Splash Brook 40 Jets

Operation/Seat Depths



- (A) Topsede Control - Activate Jet Pumps, Light and Control Water Temperature
- (B) Water Feature Control - Controls Water Feature Output.
- (C) Air Control - Activates Seat B Jets (2 DirectionalMax1 Jets), Seat C Jets (8 DirectionalMax2 Jets, 4 DirectMiniMax Jets)
- (D) Air Control - Activates Seat D Jets (6 DirectionalMax2 Jets, 2 DirectMiniMax Jets), Seat E Jets (2 DirectionalMax1 Jets)
- (E) Air Control - Activates Seat A Jets (4 DirectionalMax1 Jets, 2 DirectionalMax2 Jets, 2 DirectMiniMax Jets), Seat F Jets (4 DirectionalMax1 Jets, 2 DirectionalMax2 Jets, 2 DirectMiniMax Jets)

- Jet Pump 1: Seats A, D, E and F
- Jet Pump 2: Seats B and C

40 Total Jets

DirectionalMax1
Jets (12)

DirectionalMax2
Jets (18)

DirectMiniMax
Jets (10)



Spa Operation Subject To Change Without Notice

SEAT DEPTHS

- A = 26.50" (67.30 cm)
- B = 24.75" (62.86 cm)
- C = 28.00" (71.12 cm)
- D = 28.00" (71.12 cm)
- E = 24.75" (62.86 cm)
- F = 26.50" (67.30 cm)
- G = 20.00" (50.80 cm)
- H = 34.50" (87.63 cm)


Listed dimensions represent distance from top of spa to lowest point in seat.
Tolerance: $\pm 0.5"$ (1.27 cm)



Dimensions/Specifications Subject To Change Without Notice

Sundance Splash Brook 40 Jets

Portable Dimensions

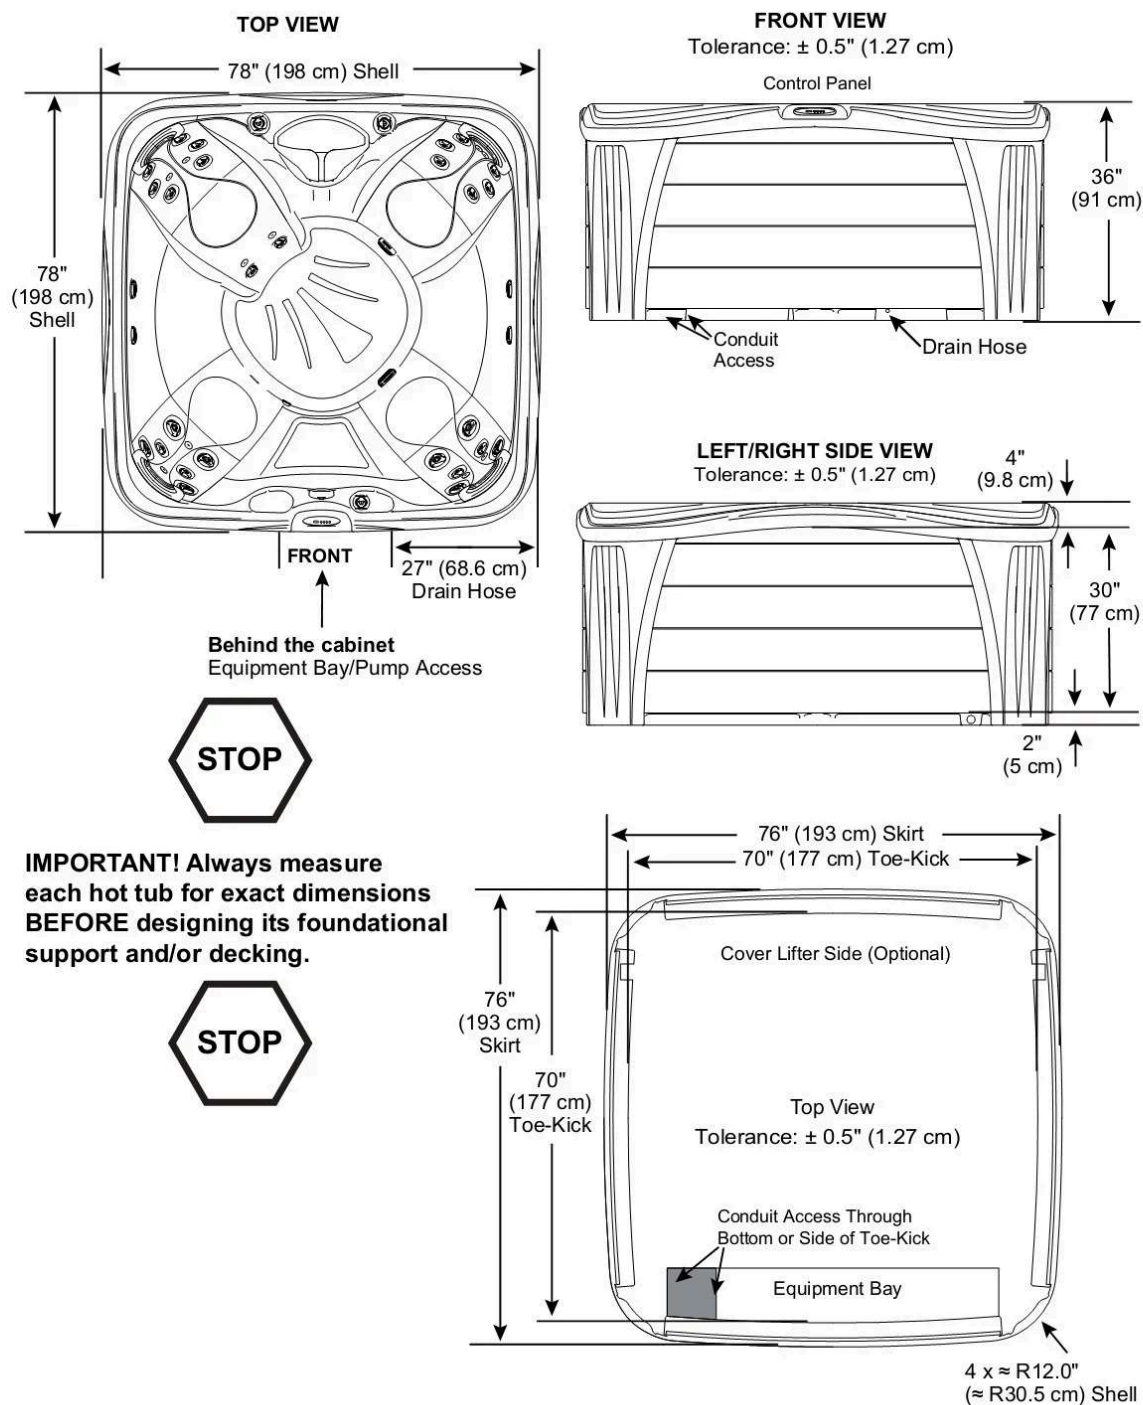

Dimensions/Specifications Subject To Change Without Notice

Sundance® Splash Brook 30 Jets

Specifications

Seating Capacity.....	7 Adults
Dimensions	78" x 78" x 36" (198 cm x 198 cm x 91 cm);
Dry Weight.....	414 lbs (187 kg)
Filled Weight (Spa Volume)	4,117 lbs (1,867 kg)
Filled Weight (Average Fill).....	3,150 lbs (1,429 kg)
Water Capacity (Spa Volume)	444 US gallons (1,681 Liters)
Water Capacity (Average Fill).....	328 US gallons (1,242 Liters)
Electronic Controls	Digital Touch Controller. Offers customizing of cleaning cycles and water temperature setting.
Pump 1.....	North America (60 Hz): 2-Speed, 3.0 HP continuous Export (50 Hz): 2 kW, 2-Speed
Pump 2.....	N/A Export (50 Hz): N/A
Circulation Pump.....	N/A
Total Jets	30
Seat A Jets	4 DirectionalMax1 Jets, 2 DirectionalMax2 Jets
Seat B Jets	2 DirectionalMax1 Jets
Seat C Jets	8 DirectionalMax2 Jets
Seat D Jets	6 DirectionalMax2 Jets
Seat E Jets	2 DirectionalMax1 Jets
Seat F Jets.....	4 DirectionalMax1 Jets, 2 DirectionalMax2 Jets
Massage Selectors	N/A
Air Controls.....	2
Water Management System.....	One Easy Klean 30 ft ² filter cartridge; Optional factory installed Ozone Export (50 Hz): Optional factory installed Ozone
LED Lighting	Multicolor waterfall light; Exterior corner light (white color only)
Shell/Cabinet Colors	Mystic Sparkle, Tuscan Sparkle, Night Sparkle, Glacier Sparkle
Headrests	4
Waterfalls	One with independent flow rate (on or off) adjustment; powered by pump 1
Heater:	Hi Flow 1.0kW/4kW Export (50 Hz): Hi Flow 3.0kW
Electrical Requirements:	North America (60 Hz): Convertible 120 VAC@15A Export (50 Hz): 230-240V@1x16A, 1X32A
Warranty*	North America (60 Hz): 5 Years Shell, 5 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 1 Year Lights; Export (50 Hz): 5 Years Shell, 5 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 2 Years Cabinet, 2 Years Jets, 2 Years Lights;
Special Features	N/A



*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Splash Brook 30 Jets

Operation/Seat Depths



- (A) Topside Control - Activate Jet Pump, Light and Control Water Temperature
- (B) Water Feature Control - Controls Water Feature Output.
- (C) Air Control - Activates Seat A Jets (4 DirectionalMax1 Jets, 2 DirectionalMax2 Jets), Seat B Jets (2 DirectionalMax1 Jets), Seat C Jets (8 DirectionalMax2 Jets)
- (D) Air Control - Activates Seat D Jets (6 DirectionalMax2 Jets), Seat E Jets (2 DirectionalMax1 Jets), Seat F Jets (4 DirectionalMax1 Jets, 2 DirectionalMax2 Jets)
- Jet Pump 1: All seats and footwell jets

30 Total Jets

DirectionalMax1
Jets (12)



DirectionalMax2
Jets (18)



Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 26.50" (67.30 cm)

B = 24.75" (62.86 cm)

C = 28.00" (71.12 cm)

D = 28.00" (71.12 cm)

E = 24.75" (62.86 cm)

F = 26.50" (67.30 cm)

G = 20.00" (50.80 cm)

H = 34.50" (87.63 cm)

Listed dimensions represent
distance from top of spa to
lowest point in seat.


Tolerance: $\pm 0.5"$ (1.27 cm)



Dimensions/Specifications Subject To Change Without Notice

Sundance Splash Brook 30 Jets

Portable Dimensions

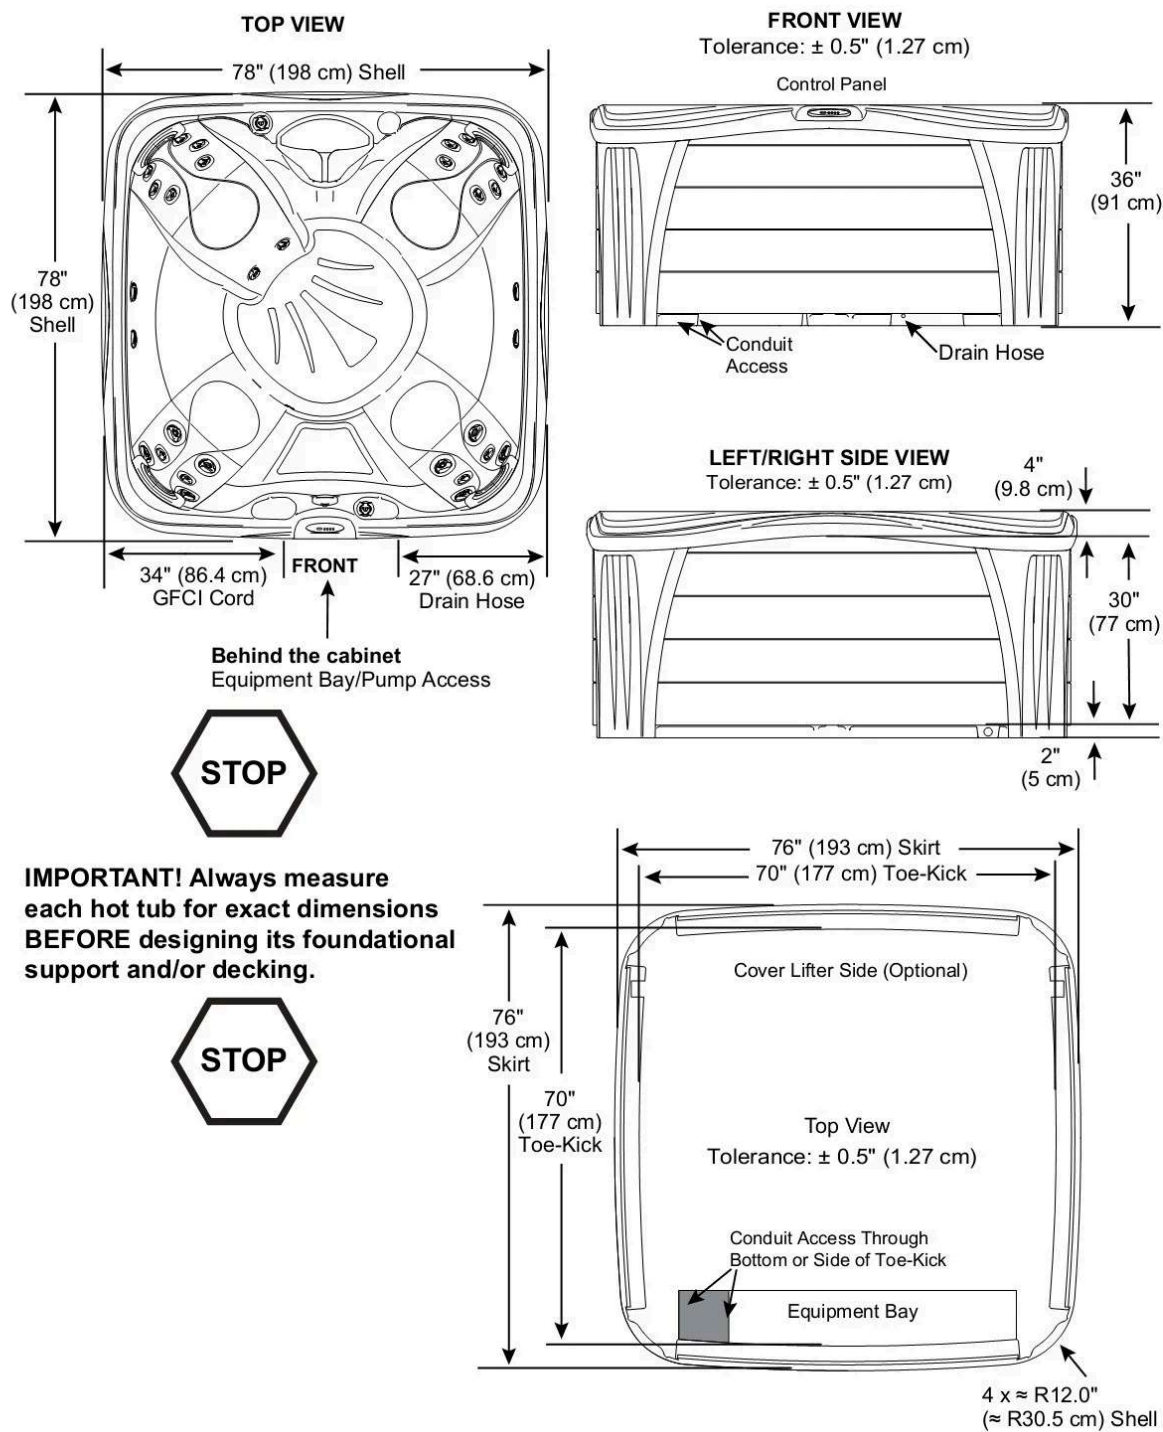

Dimensions/Specifications Subject To Change Without Notice

Sundance® Splash Paisley™

Specifications

Seating Capacity.....	5 Adults
Dimensions	78" x 68" x 32" (198 cm x 173 cm x 81 cm);
Dry Weight.....	285 lbs (129 kg)
Filled Weight (Spa Volume)	3,120 lbs (1,415 kg)
Filled Weight (Average Fill).....	2,404 lbs (1,090 kg)
Water Capacity (Spa Volume)	340 US gallons (1,287 Liters)
Water Capacity (Average Fill).....	254 US gallons (961 Liters)
Electronic Controls	Digital Touch Controller. Offers customizing of cleaning cycles and water temperature setting.
Pump 1.....	North America (60 Hz): 2-Speed, 2.0 HPR continuous Export (50 Hz): 2-Speed, 1.5 HP
Pump 2.....	N/A Export (50 Hz): N/A
Circulation Pump.....	N/A
Total Jets	20
Seat A Jets	1 DirectionalMax1, 1 DirectionalMax2
Seat B Jets	2 DirectionalMax1
Seat C Jets	1 DirectionalMax2, 1 DirectionalMax2
Seat D Jets	2 DirectionalMax1, 2 DirectionalMax2, 2 DirectMiniMax
Seat E Jets	2 DirectionalMax1, 2 DirectionalMax2, 2 DirectMiniMax
Footwell (F) Jets	2 DirectionalMax1
Massage Selectors	N/A
Air Controls.....	2
Water Management System	One Easy Kleen 30 ft ² filter cartridge; Optional factory installed Ozone Export (50 Hz): Optional factory installed Ozone
LED Lighting	Multicolor Waterfall light; Footwell light, Exterior corner lights (8 qty)
Shell/Cabinet Colors	Mystic Sparkle, Tuscan Sparkle, Night Sparkle, Glacier Sparkle
Headrests	2
Waterfalls	One with independent flow rate (on or off) adjustment; powered by pump 1
Heater:	Hi Flow 1.0kW/4kW Export (50 Hz): Hi Flow 3.0kW
Electrical Requirements:	North America (60 Hz): Convertible 120 VAC@15A or 240 VAC@30A, 40A Export (50 Hz): 230-240V@1x16A, 1X32A
Warranty*	North America (60 Hz): 5 Years Shell, 5 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 1 Year Lights; Export (50 Hz): 5 Years Shell, 5 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 2 Years Cabinet, 2 Years Jets, 2 Years Lights;
Special Features	Optional Suite Package Add-On



*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Splash Paisley

Operation/Seat Depths



- (A) Topside Control - Activate Jets Pump, Light and Control Water Temperature
 - (B) Air Control - Activates Seat A Jets (1 DirectionalMax1 Jet, 1 DirectionalMax2 Jet), Seat B Jets (2 DirectionalMax1 Jets), Seat C Jets (1 DirectionalMax1 Jet, 1 DirectionalMax2 Jet), Footwell Jets (2 DirectionalMax2 Jets)
 - (C) Air Control - Activates Seat D Jets (2 DirectionalMax1 Jets, 2 DirectionalMax2 Jets, 2 DirectMiniMax Jets), Seat E Jets (2 DirectionalMax1 Jets, 2 DirectionalMax2 Jets, 2 DirectMiniMax Jets)
 - (D) Water Feature Control - Controls Water Feature Output.
- Jet Pump 1: All seats and footwell jets

20 Total Jets

DirectionalMax1
Jets (10)



DirectionalMax2
Jets (6)



DirectMiniMax
Jets (4)



Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 26.50" (67.31 cm)

B = 26.25" (66.68 cm)

C = 26.50" (67.31 cm)

D = 26.25" (66.68 cm)

E = 28.30" (71.87 cm)

F = 18.00" (45.72 cm)

G = 30.50" (77.47 cm)


Listed dimensions represent
distance from top of spa to
lowest point in seat.
Tolerance: $\pm 0.5"$ (1.27 cm)



Dimensions/Specifications Subject To Change Without Notice

Sundance Splash Paisley

Portable Dimensions

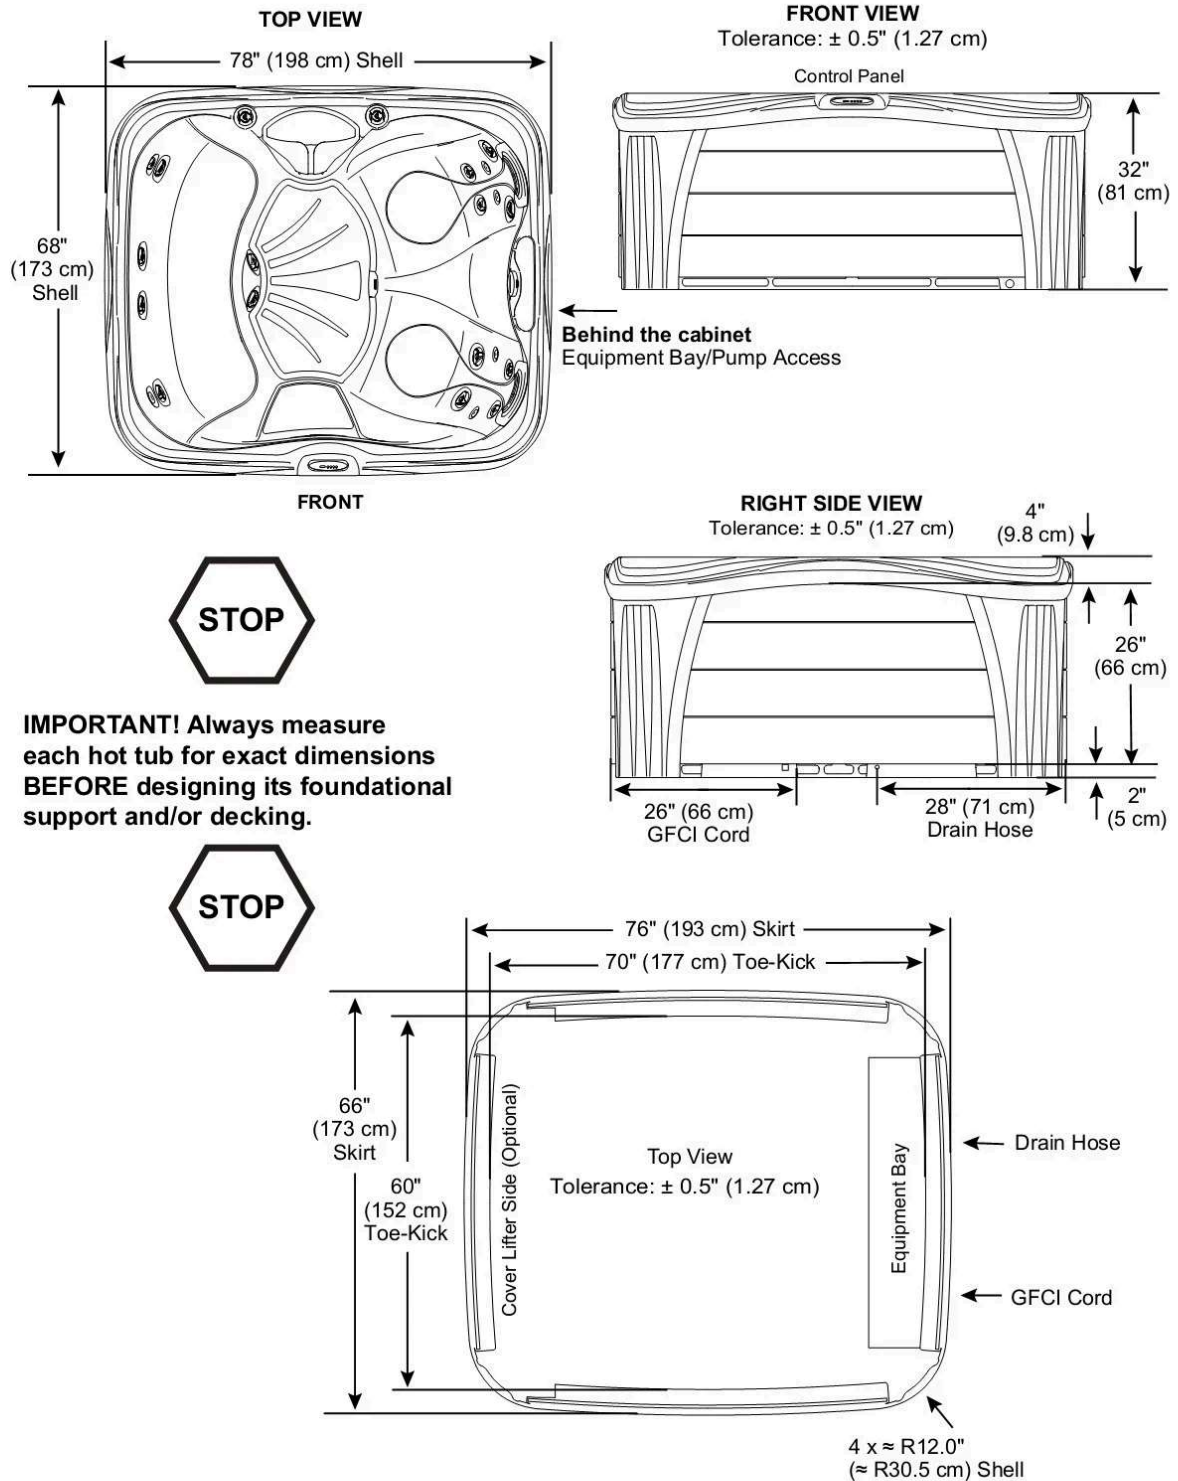

Dimensions/Specifications Subject To Change Without Notice

Sundance® Spas

Sundance Spas, Inc.

14525 Monte Vista Ave, Chino CA 91710/U.S.A.; Phone (909) 606-7733, Fax: (800) 497-7727
Website: <http://www.sundancespas.com>

GME-1250 Rev. Q/(12/20)

©Sundance Spas, Inc.